



How to change rear  
brake pads on **VW**  
**Transporter T4** –  
replacement guide

## VIDEO TUTORIAL



### Important!

This replacement procedure can be used for:

VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.4 D Syncro, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.5 Syncro, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.5, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 1.9 TD, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.4 D, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.0, VW Sharan I (7M8, 7M9, 7M6) 1.9 TDI, VW Sharan I (7M8, 7M9, 7M6) 2.0, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.5 TDI, VW Passat B6 Variant (3C5) 2.0 TDI, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.5 TDI Syncro, VW Transporter T4 Van (70A, 70H, 7DA, 7DH) 2.0, VW Transporter T4 Van (70A, 70H, 7DA, 7DH) 2.5, VW Transporter T4 Van (70A, 70H, 7DA, 7DH) 1.9 TD, VW Transporter T4 Van (70A, 70H, 7DA, 7DH) 2.4 D, (+ 50)

The steps may slightly vary depending on the car design.

REPLACEMENT: BRAKE PADS – VW TRANSPORTER T4.  
TOOLS YOU NEED:



- Wire brush
- Brake cleaner
- Anti-squeal paste
- Copper grease
- Combination spanner #15
- Drive socket # 13
- Wheel impact socket #17
- Ratchet wrench
- Torque wrench
- Brake caliper wind back tool
- Crow bar
- Wheel chock


**BUY TOOLS**

Replacement: brake pads – VW Transporter T4. Professionals recommend:

- Perform the replacement of brake pads in complete set for each axis. This provides effective braking.
- The replacement procedure is identical for all brake pads on the same axle.
- Warning! Shut down the engine before starting any work – VW Transporter T4.

**CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:**

**1** Open the bonnet. Unscrew the brake fluid reservoir cap.

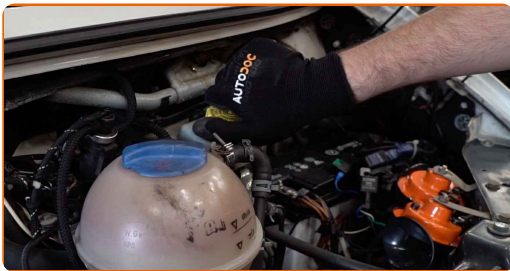

**2** Secure the wheels with chocks.



**3** Loosen the wheel mounting bolts. Use wheel impact socket #17.



4

Raise the rear of the car and secure on supports.



5

Unscrew the wheel bolts.




Replacement: brake pads – VW Transporter T4. Tip:

- To avoid injury, hold up the wheel when unscrewing the bolts.

6

Remove the wheel.

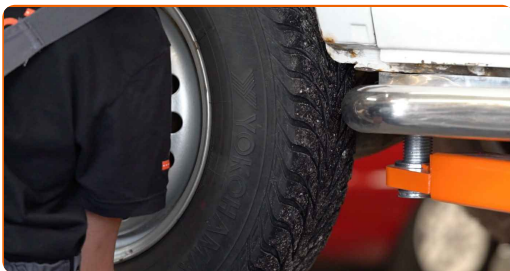

7

Spread the brake pads. Use a crowbar.

8

Clean the brake caliper fasteners. Use a wire brush. Use a brake cleaner.



**AUTODOC recommends:**

- Replacement: brake pads – VW Transporter T4. After applying the spray, wait a few minutes.


9

Unscrew the brake caliper fastening. Use a combination spanner #15. Use a drive socket #13. Use a ratchet wrench.




10

Disconnect the brake pad wear sensor plug.

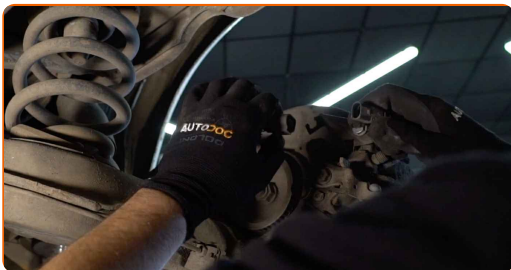

11

Remove the brake caliper.

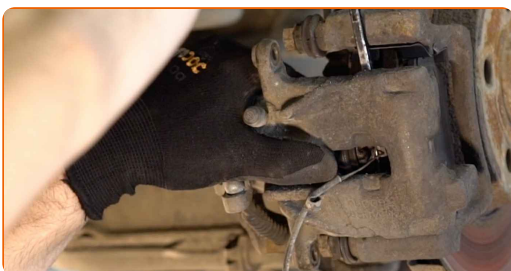


Replacement: brake pads – VW Transporter T4. AUTODOC recommends:

- Tie the caliper to the suspension or to the body with a wire without disconnecting from the brake hose to prevent depressurization of the brake system.
- Make sure that the brake caliper is not hanging on the brake hose.
- Don't press the brake pedal after the brake caliper has been removed. As a result, the piston can fall out from the brake cylinder, and brake fluid leakage and depressurization of the system may occur.

12

Remove the brake pads.

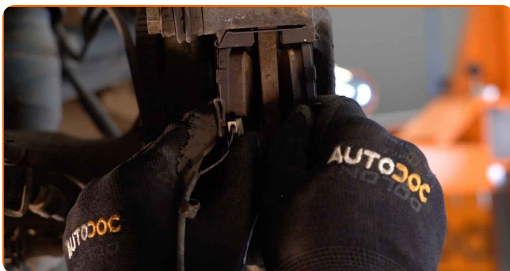

13


Disconnect the brake pads wear sensor. Use a crowbar.

Please note!

- Some cars are not equipped with the brake pad wear sensor.

14

Clean the brake caliper bracket from dirt and dust. Use a wire brush. Use a brake cleaner.

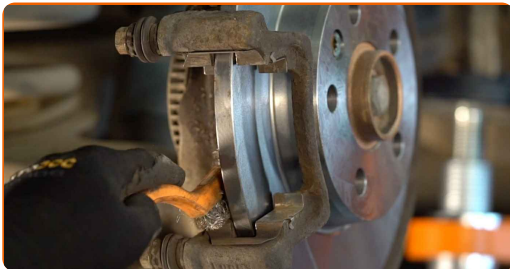

Replacement: brake pads – VW Transporter T4. AUTODOC experts recommend:

- After applying the spray, wait a few minutes.

15

Treat the brake caliper piston. Use a brake cleaner.



AUTODOC recommends:

- Replacement: brake pads – VW Transporter T4. After applying the spray, wait a few minutes.




16 Press in the brake caliper piston. Use brake caliper wind back tool.




17 Treat the brake caliper bracket where it contacts the brake pads. Use anti-squeal paste.



18 Install the brake pads. Connect the brake pads wear sensor.

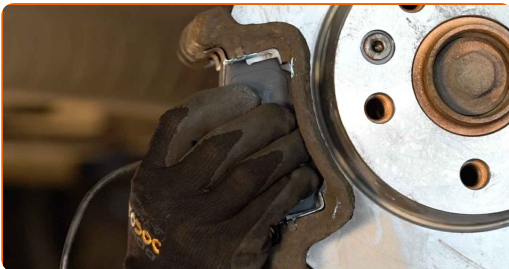

19 Install the brake caliper and fix it. Use a combination spanner #15. Use a drive socket #13. Use a torque wrench. Tighten it to 35 Nm torque.

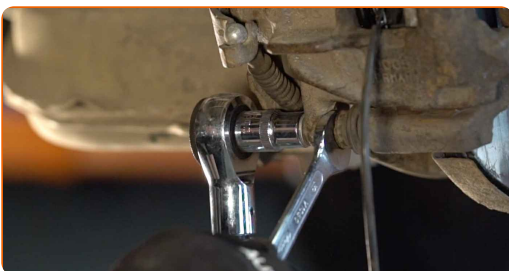

20 Connect the brake pad wear sensor plug.




21 Clean the brake disk surface. Use a brake cleaner.




Replacement: brake pads – VW Transporter T4. AUTODOC experts recommend:

- After applying the spray, wait a few minutes.

22 Treat the surface where the brake disc contacts the wheel rim. Use copper grease.

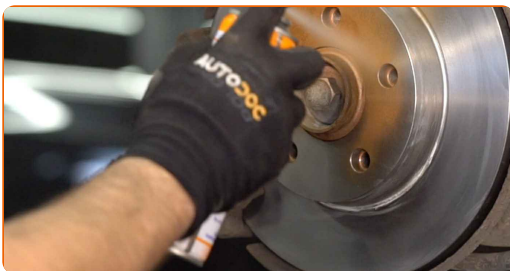

23 Install the wheel.

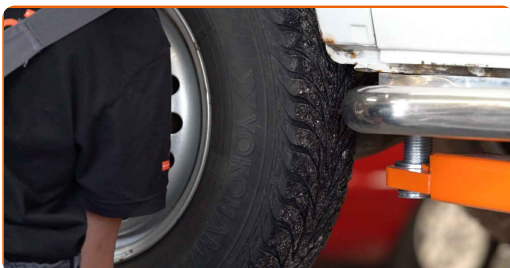

AUTODOC recommends:

- Important! Hold the wheel while screwing in the fastening bolts. VW Transporter T4

24

Screw in the wheel bolts. Use wheel impact socket #17.



25

Lower the car and working in a cross order, tighten the wheel bolts. Use a torque wrench. Tighten it to 170 Nm torque.



Replacement: brake pads – VW Transporter T4. Tip from AUTODOC:

- Check the brake fluid level in the expansion tank and refill if necessary.

26

Tighten the brake fluid reservoir cap.



27

Close the hood.




**AUTODOC recommends:**

- VW Transporter T4 – Press the brake pedal several times with the engine shut down until you feel the resistance built up.

28

Remove the jacks and chocks.

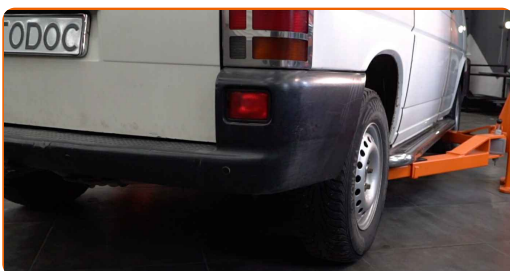

**Replacement: brake pads – VW Transporter T4. AUTODOC recommends:**

- Slow down smoothly for first 150-200 km after the brake pads replacement. Avoid unnecessary and sharp braking to a stop.

**WELL DONE!**

**VIEW MORE TUTORIALS**

## AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

**AUTODOC+**

GET IT ON  
Google Play

Download on the  
App Store

Download

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR VW**

**BRAKE PADS: A WIDE SELECTION**

**CHOOSE CAR PARTS FOR VW TRANSPORTER T4**

**BRAKE PADS FOR VW: BUY NOW**

**BRAKE PADS FOR VW TRANSPORTER T4: THE BEST DEALS  
& OFFERS**

### **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.