



How to change rear
brake discs on **Volvo V70**
SW – replacement guide

VIDEO TUTORIAL


** Important!**

This replacement procedure can be used for:

VOLVO V70 I (875, 876) 2.0, VOLVO V70 I (875, 876) 2.4, VOLVO V70 I (875, 876) 2.5 TDI, VOLVO V70 I (875, 876) 2.3 Turbo, VOLVO V70 I (875, 876) 2.0 Turbo, VOLVO S80 I (184) 2.9, VOLVO S80 I (184) 2.8 T6, VOLVO S80 I (184) 2.4, VOLVO S80 I (184) 2.0 T, VOLVO S80 I (184) 2.5 TDI, VOLVO S80 I (184) 2.0, VOLVO V70 I (875, 876) 2.4 Bifuel, VOLVO XC70 Cross Country (295) 2.4 T XC AWD, VOLVO V70 II (285) 2.3 T5, VOLVO V70 II (285) 2.4 T, (+ 46)

The steps may slightly vary depending on the car design.

REPLACEMENT: BRAKE DISCS – VOLVO V70 SW. LIST OF THE TOOLS YOU'LL NEED:

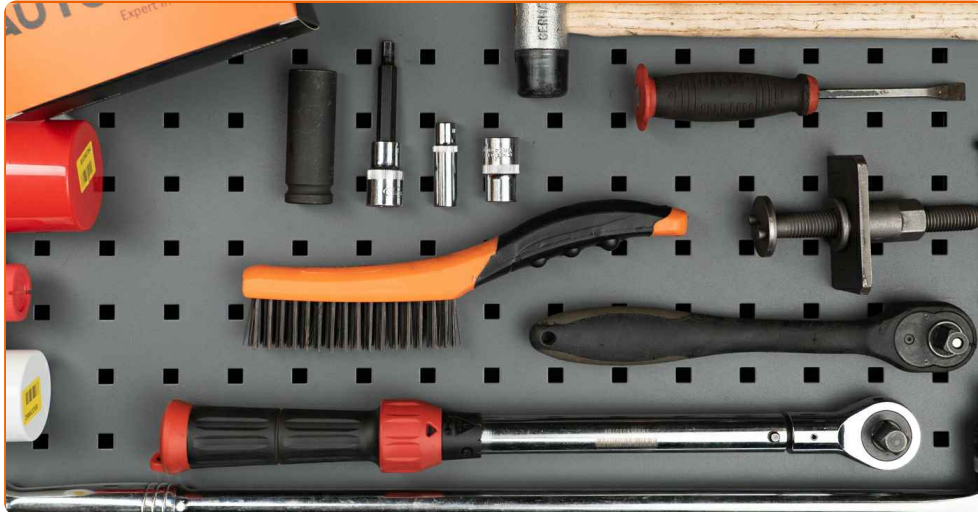

- Wire brush
- WD-40 spray
- Brake cleaner
- Copper grease
- HEX bit No.H7
- Impact socket №10
- Impact socket №13
- Wheel impact socket #19
- Brake caliper wind back tool
- Ratchet wrench
- Torque wrench
- Tap wrench
- Rubber mallet
- Crow bar
- Wheel chock

BUY TOOLS


Replacement: brake discs – Volvo V70 SW. Tip from AUTODOC experts:

- Replace the brake disks on the car Volvo V70 SW in complete set for each axis. Regardless of the state of components. This will ensure even braking.
- The replacement procedure is identical for both brake disks on the same axle.
- When changing the brake discs, always replace the brake pads.
- Please note: all work on the car – Volvo V70 SW – should be done with the engine switched off.


CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1

Open the bonnet. Unscrew the brake fluid reservoir cap.

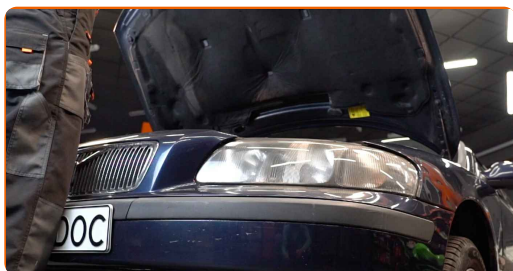**2**

Secure the wheels with chocks.

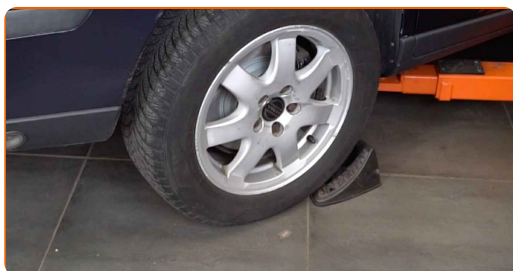

3 Loosen the wheel mounting bolts. Use wheel impact socket #19.



4 Raise the rear of the car and secure on supports.




5 Unscrew the wheel bolts.




AUTODOC recommends:

- Warning! To avoid injury, hold the wheel while unscrewing the fastening bolts.
Volvo V70 SW


6 Remove the wheel.

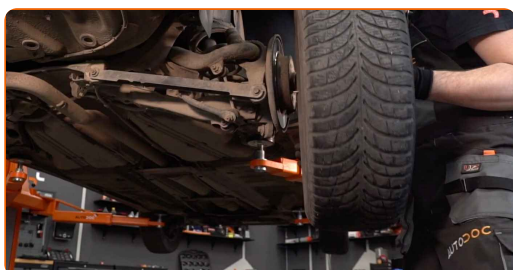


7 Spread the brake pads. Use a crowbar.

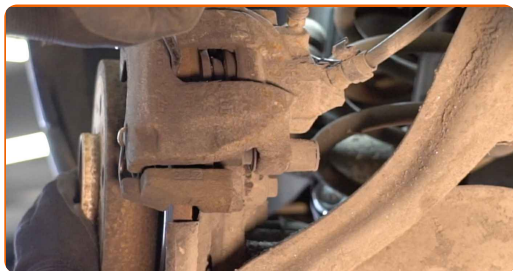


8 Remove the dust boot caps of the brake caliper guide pins. Use a crowbar.

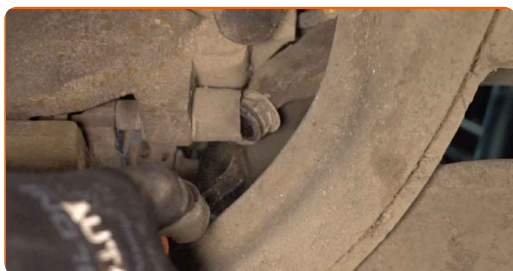


9 Unscrew the brake caliper fastening. Use HEX No.H7. Use a ratchet wrench.

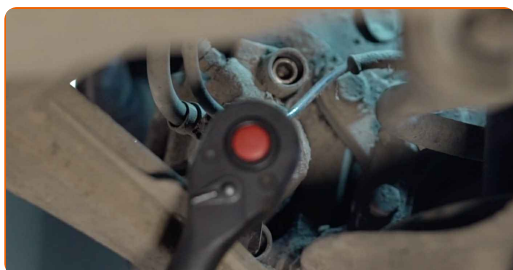

10 Detach the brake caliper retaining spring. Use a crowbar.

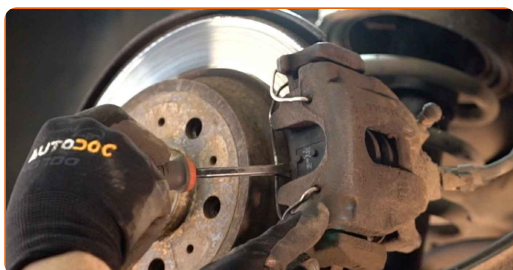

11 Remove the brake caliper.

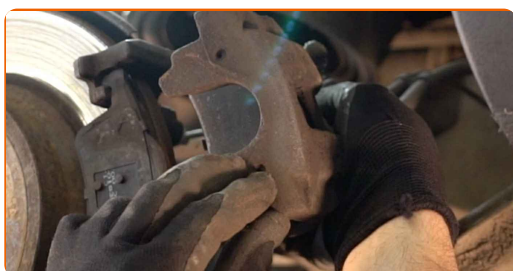


Replacement: brake discs – Volvo V70 SW. Tip from AUTODOC experts:

- Tie the caliper to the suspension or to the body with a wire without disconnecting from the brake hose to prevent depressurization of the brake system.
- Make sure that the brake caliper is not hanging on the brake hose.
- Don't press the brake pedal after the brake caliper has been removed. As a result, the piston can fall out from the brake cylinder, and brake fluid leakage and depressurization of the system may occur.
- Check the brake caliper bracket, brake caliper guide pins and boots. Clean them. Replace, if necessary.


12

Remove the brake pads. Use a crowbar.

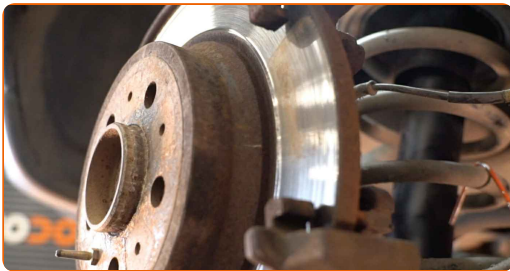


13


Clean the brake caliper bracket fasteners. Use a wire brush. Use WD-40 spray.

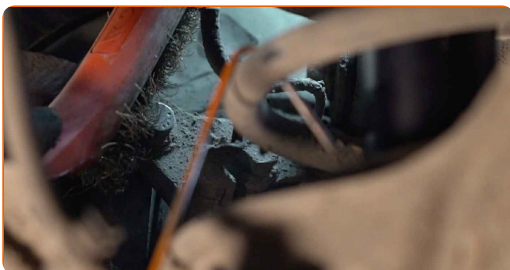


14 Unscrew the caliper bracket fastening. Use a drive socket #13. Use a tap wrench. Use a ratchet wrench.

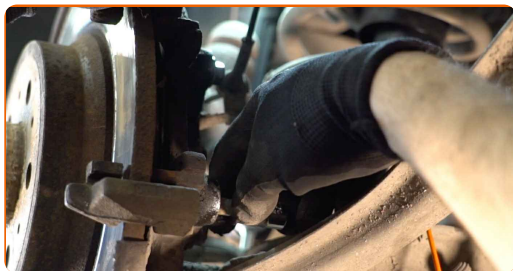


15 Remove the caliper bracket.

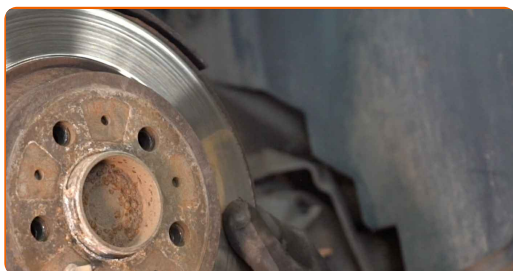


16 Clean the brake disk surface. Use a wire brush. Use WD-40 spray.

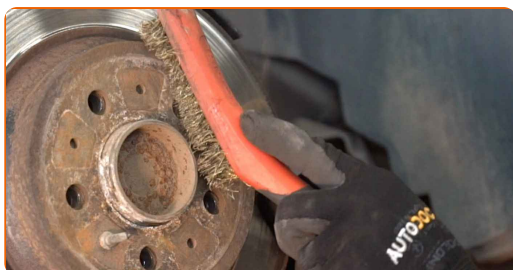

17 Unscrew the brake disc fastening. Use a drive socket #10. Use a ratchet wrench.

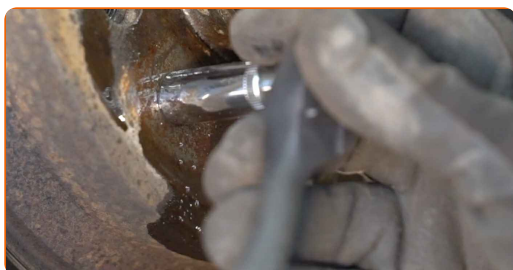

18 Remove the brake disc.

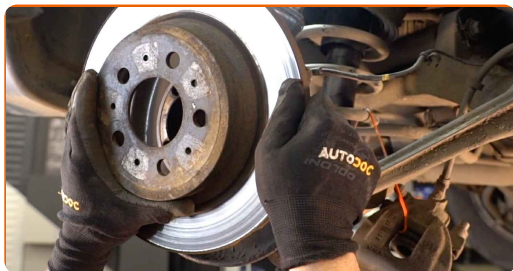


19 Clean the hub. Use a wire brush. Treat the contacting surface. Use copper grease.



20 Install the brake disc.



21 Tighten the brake disc fastening. Use a drive socket #10. Use a torque wrench. Tighten it to 9 Nm torque.

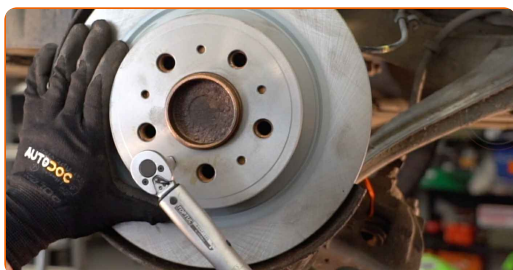

22

Clean the brake caliper bracket from dirt and dust. Use a wire brush. Use a brake cleaner.



AUTODOC recommends:

- Replacement: brake discs – Volvo V70 SW. After applying the spray, wait a few minutes.


23

Install the brake caliper bracket.



24

Tighten the brake caliper bracket. Use a drive socket #13. Use a torque wrench. Tighten it to 60 Nm torque.

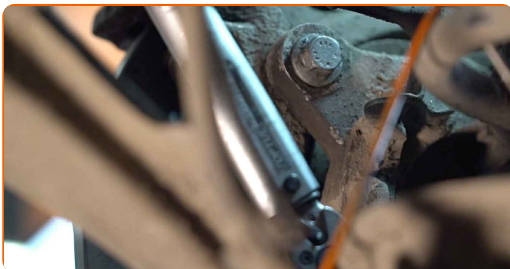

25 Treat the brake caliper piston. Use a brake cleaner.



Replacement: brake discs – Volvo V70 SW. Tip from AUTODOC:

- After applying the spray, wait a few minutes.

26 Press in the brake caliper piston. Use brake caliper wind back tool.




27 Install the brake pads.




28

Install the brake caliper and fix it. Use HEX No.H7. Use a torque wrench. Tighten it to 30 Nm torque.

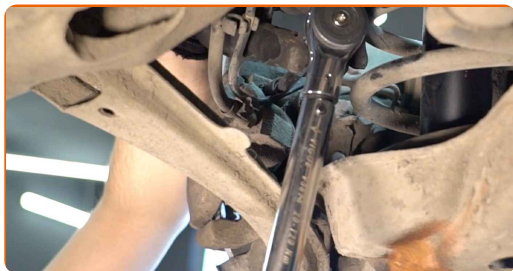


29

Install the dust boot caps of the brake caliper guide pins.

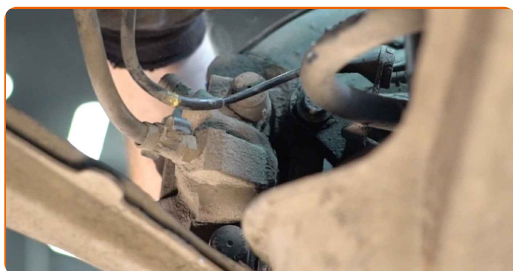

30

Install the brake caliper retaining spring. Use a rubber mallet. Use a crowbar.

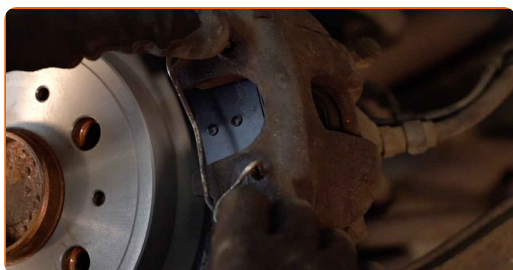

31

Treat the surface where the brake disc contacts the wheel rim. Use copper grease.



32

Clean the brake disk surface. Use a brake cleaner.




AUTODOC recommends:

- Replacement: brake discs – Volvo V70 SW. After applying the spray, wait a few minutes.

33

Install the wheel.

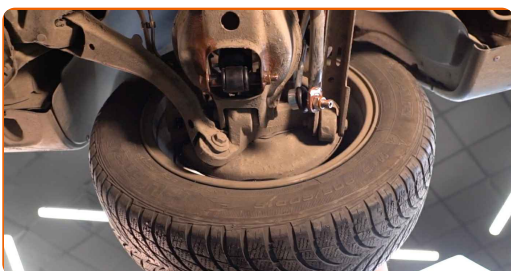


AUTODOC recommends:

- Warning! To avoid injury, hold the wheel while screwing in the fastening bolts on the car. Volvo V70 SW

34

Screw in the wheel bolts. Use wheel impact socket #19.

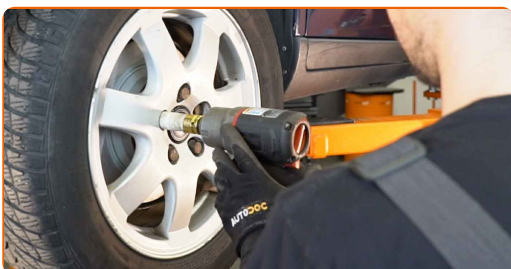

- 35** Lower the car and working in a cross order, tighten the wheel bolts. Use a torque wrench. Tighten it to 140 Nm torque.



- 36** Remove the jacks and chocks.



Replacement: brake discs – Volvo V70 SW. Tip from AUTODOC experts:

- Without starting the engine, press the brake pedal several times until you feel significant resistance.
- Check the brake fluid level in the expansion tank and refill if necessary.

37

Tighten the brake fluid reservoir cap. Close the hood.



WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON  **Google Play**

 **Download on the App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR VOLVO

BRAKE DISCS: A WIDE SELECTION

CHOOSE CAR PARTS FOR VOLVO V70 SW

BRAKE DISCS FOR VOLVO: BUY NOW

BRAKE DISCS FOR VOLVO V70 SW: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.