



How to change engine oil
and filter on **Volvo V70**
BW – replacement guide

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:

VOLVO V60 (155, 157) 2.0 T, VOLVO V60 (155, 157) 2.0 T5, VOLVO XC60 (156) 2.0 T5, VOLVO S80 II (124) 2.0 T5, VOLVO V70 III (135) 2.0 T5, VOLVO S40 II (544) 2.0 F, VOLVO S40 II (544) 1.8, VOLVO V50 (545) 1.8, VOLVO C30 (533) 1.8, VOLVO C30 (533) 2.0, VOLVO S40 II (544) 2.0, VOLVO V50 (545) 2.0, VOLVO V70 III (135) 2.0, VOLVO C30 (533) 1.8 FlexFuel, VOLVO S40 II (544) 1.8 FlexFuel, (+ 11)

The steps may slightly vary depending on the car design.

REPLACEMENT: ENGINE OIL AND FILTER – VOLVO V70
 BW. TOOLS YOU'LL NEED:



- Wire brush
- All-purpose cleaning spray
- Torque wrench
- Drive socket # 15
- Oil filter cup socket 76-14F
- Ratchet wrench
- Funnel
- Oil drain pan
- Fender cover

BUY TOOLS

Replacement: engine oil and filter – Volvo V70 BW. Tip from AUTODOC experts:

- Replace the oil filter every time when changing motor oil.
- Wear gloves to prevent contact with hot liquid.
- All work should be done with the engine stopped.

REPLACEMENT: ENGINE OIL AND FILTER – VOLVO V70 BW. USE THE FOLLOWING PROCEDURE:

1

Open the bonnet.




2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.



3


Pull up the oil dipstick.

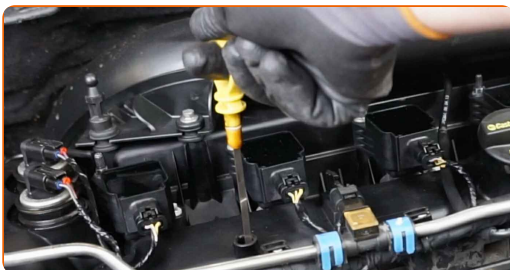

4 Unscrew the oil filler plug.



5 Lift the car using a jack or place it over an inspection pit.

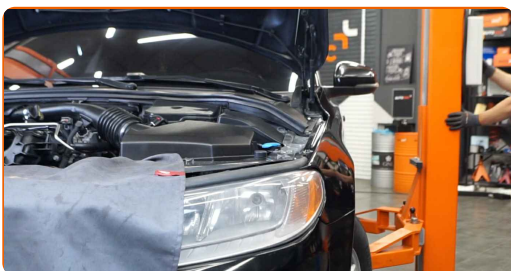

AUTODOC recommends:

- The vehicle must be on a level surface, but if it is at an angle, the drain plug must be at the lowest point.

6 Put a waste oil container with at least 6 l capacity under the drainage hole.



7

Clean the area of the oil pan drainage hole. Use a wire brush. Use all-purpose cleaning spray.




8

Unscrew the drain plug. Use a drive socket #15. Use a ratchet wrench.



9

Drain the used oil.

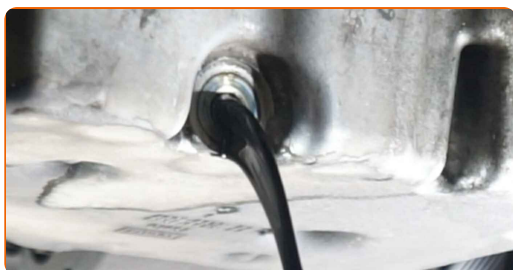

Replacement: engine oil and filter – Volvo V70 BW. Tip from AUTODOC:

- Caution! The oil may be hot.
- Wait until the oil has completely drained from the drainage hole.


10 Clean the oil filter. Use all-purpose cleaning spray.



11 Unscrew the oil filter. Use the 76-14F socket. Use a ratchet wrench.



12 Remove the oil filter.

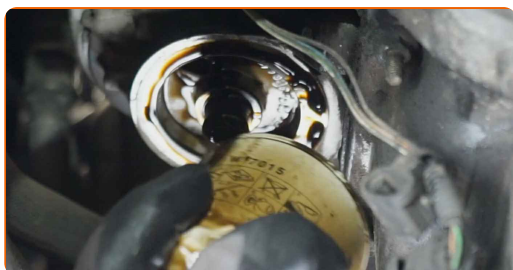

13 Clean the oil filter seat. Use all-purpose cleaning spray.



14 Lubricate the rubber seal of the new filter with a little amount of fresh oil.




15 Install a new oil filter.



16 Tighten the oil filter. Remember to observe the recommended tightening torque. Use the 76-14F socket. Use a torque wrench. Tighten it to 17 Nm torque.



17 Clean the area of the oil pan drainage hole. Use all-purpose cleaning spray.

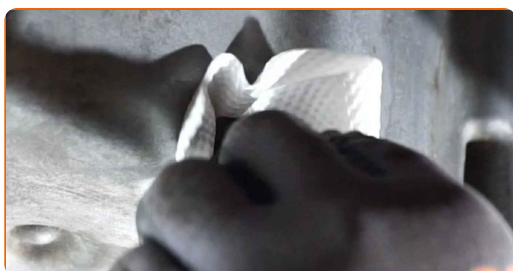

18 Screw in the new drainage plug and tighten it. Use a drive socket #15. Use a torque wrench. Tighten it to 27 Nm torque.




19


Clean the area of the oil pan drainage hole. Use all-purpose cleaning spray.

**20**

Lower the car.

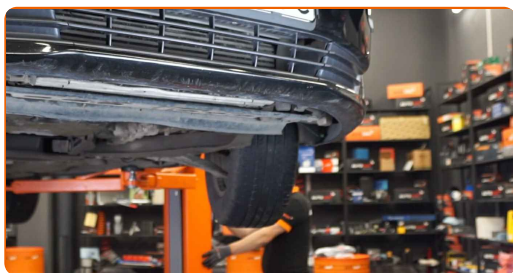**21**

Remove the oil filler cap.

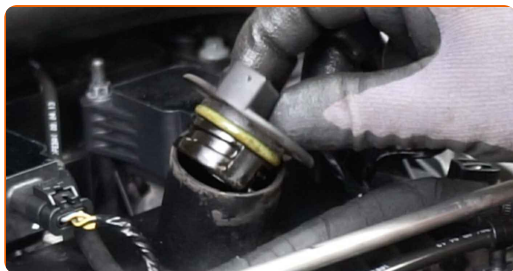**22**

Insert the funnel.

**23**

Pour oil into the engine through the filler. Required amount of oil: 5,9 l.




AUTODOC recommends:

- Use the oil recommended by the manufacturer.

24

Check the oil level using the dipstick.

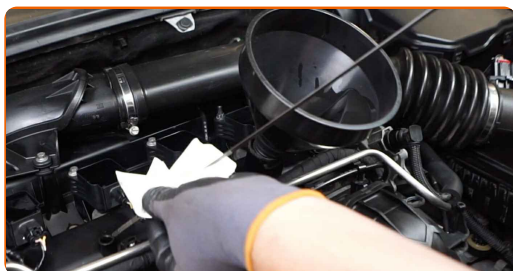


Replacement: engine oil and filter – Volvo V70 BW. Professionals recommend:

- Top up oil if necessary.
- The oil level should be between the Min and Max marks.

25

Install the oil filler cap.

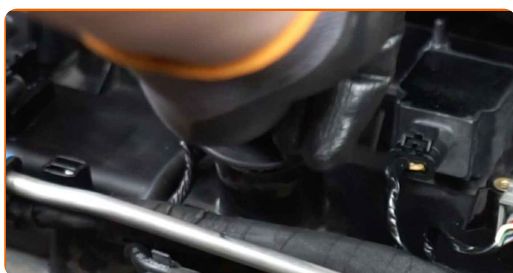


26

Tighten the oil filler cap.



27 Run the engine for a few minutes.

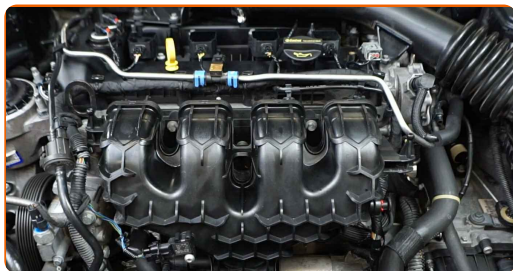

28 After the oil pressure warning light goes out, stop the engine.

Replacement: engine oil and filter – Volvo V70 BW. AUTODOC recommends:

- Note that oil pressure warning light, which indicates insufficient pressure in the lubrication system, may be on for a longer time than usual. After a few seconds, the oil will fill all the channels, and the light will go out.

29 Check the oil level with a dipstick 5 minutes after turning the engine off and add oil if necessary.




Please note!

- The oil level should be between the Min and Max marks.


30 Make sure that the oil filler cap is properly tightened.

31 Check the threaded plug of the drainage hole and the oil filter seal for tightness. If necessary, carefully tighten them up.

32 Remove the fender protection cover.

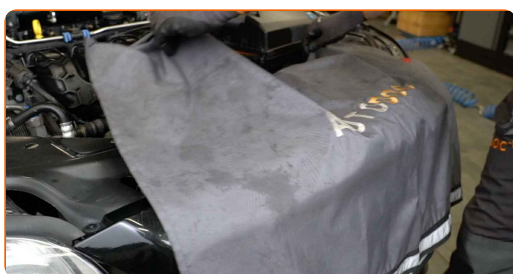

33 Close the bonnet.

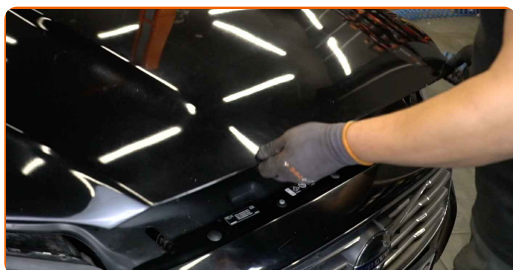

Replacement: engine oil and filter – Volvo V70 BW. Tip from AUTODOC experts:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON  **Google Play**

 **Download on the App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR VOLVO

OIL FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR VOLVO V70 BW

OIL FILTER FOR VOLVO: BUY NOW

**OIL FILTER FOR VOLVO V70 BW: THE BEST DEALS &
OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.