# - AUTODOC CLUB

How to change pollen filter on **Volvo V70 BW** – replacement guide



#### **VIDEO TUTORIAL**




(i) Important!

This replacement procedure can be used for:

VOLVO V60 (155, 157) 2.0 T, VOLVO V60 (155, 157) 2.0 D3 / D4, VOLVO V60 (155, 157) 2.4 D5, VOLVO V60 (155, 157) 2.4 D5 AWD, VOLVO V60 (155, 157) 1.6 T3, VOLVO V60 (155, 157) 1.6 T4, VOLVO V60 (155, 157) 2.0 T5, VOLVO V60 (155, 157) 3.0 T6 AWD, VOLVO V70 III (135) 1.6 T4, VOLVO XC60 (156) 2.0 T5, VOLVO S80 II (124) 1.6 T4, VOLVO S80 II (124) 2.0 T5, VOLVO S80 II (124) 3.0 T6 AWD, VOLVO S80 II (124) 2.0 D3 / D4, VOLVO XC70 II Estate (136) 3.2 AWD, (+ 140)

The steps may slightly vary depending on the car design.

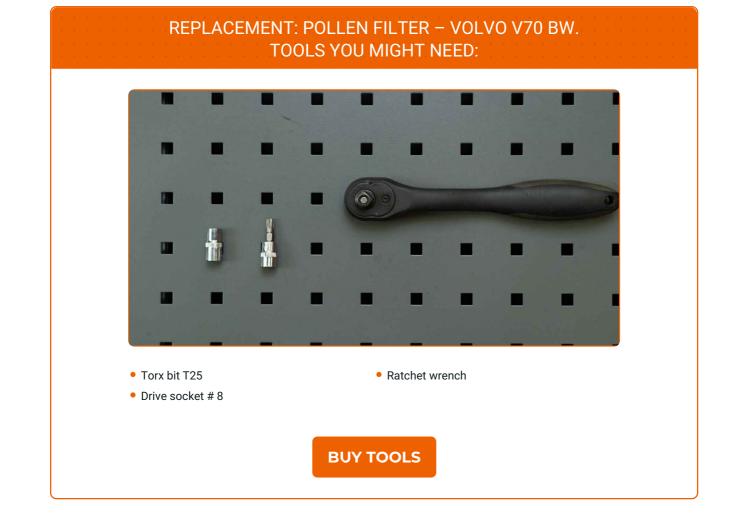

4

O



#### Replacement: pollen filter – Volvo V70 BW. AUTODOC recommends:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- All work should be done with the engine stopped.

## **REPLACEMENT: POLLEN FILTER – VOLVO V70 BW. USE THE FOLLOWING PROCEDURE:**

1

Open the car door.





Remove the floor mat from the passenger side.



### + AUTODOC CLUB



3

Bend back the floor liner on the passenger's side.



4

Unscrew the fasteners of the passenger side kick panel. Use Torx T25.



5

Move the lower glove box cover aside.



6

Detach the fuse box and move it aside.



7

Open the glove box.






8

Unscrew the glove box mounting screws. Use Torx T25. Use a drive socket #8. Use a ratchet wrench.



9

Remove the side panel on the passenger side.



10

#### Remove the glove box.



11

Detach the glove box connectors.



12

Remove the cabin filter housing cover.







Remove the cabin filter.



#### Replacement: pollen filter – Volvo V70 BW. Tip from AUTODOC experts:

• Do not attempt to clean and reuse the filter – this will reduce the quality of cabin air filtration.



Install a new cabin filter according to the air flow direction mark.



#### AUTODOC recommends:

• Look at the marks on the new filter. They may indicate the air flow direction, which should be considered when installing the part.

### + AUTODOC CLUB



15

Install the cabin filter housing cover.



16

Reattach the glove box connectors.



17

#### Install the glove box.



18

Screw in the glove box mounting screws. Use Torx T25. Use a drive socket #8. Use a ratchet wrench.



19

Install the side panel on the passenger side.



### + AUTODOC CLUB



Close the glove box.



#### 21

Reinstall the fuse box.



22

Install and secure the cover under the glove box.



23

Screw in the fasteners of the passenger side kick panel. Use Torx T25.



24

Put the passenger's side floor liner back.



O





Return the floor mat to the original position.



26

Close the car door.





Switch on the ignition.

28

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.



29


Switch off the ignition.



VIEW MORE TUTORIALS



### AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

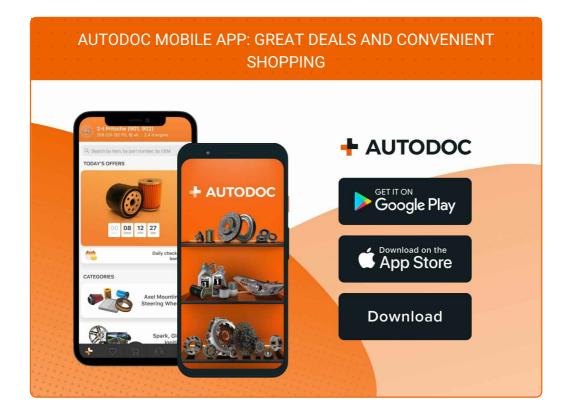

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

#### **BUY SPARE PARTS FOR VOLVO**

**POLLEN FILTER: A WIDE SELECTION** 



#### **CHOOSE CAR PARTS FOR VOLVO V70 BW**

#### POLLEN FILTER FOR VOLVO: BUY NOW

### POLLEN FILTER FOR VOLVO V70 BW: THE BEST DEALS & OFFERS

### (i) **DISCLAIMER**:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.