



How to change front
brake hose on
VAUXHALL Astra Mk IV
(G) CC (T98) –
replacement guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

ⓘ Important!

This replacement procedure can be used for:

VAUXHALL Astra Mk IV (G) CC (T98) 1.4 16V, VAUXHALL Astra Mk IV (G) CC (T98) 1.6, VAUXHALL Astra Mk IV (G) CC (T98) 1.6 16V, VAUXHALL Astra Mk IV (G) CC (T98) 1.8 16V, VAUXHALL Astra Mk IV (G) CC (T98) 2.0 16V, VAUXHALL Astra Mk IV (G) CC (T98) 1.7 TD, VAUXHALL Astra Mk IV (G) CC (T98) 2.0 DI, VAUXHALL Astra Mk IV (G) CC (T98) 2.0 DTI 16V, VAUXHALL Astra Mk IV (G) CC (T98) 1.7 DTI 16V, VAUXHALL Astra Mk IV (G) CC (T98) 2.2 16V, VAUXHALL Astra Mk IV (G) CC (T98) 2.0 SRI Turbo, VAUXHALL Astra Mk IV (G) CC (T98) 1.7 CDTI 16V, VAUXHALL Astra Mk IV (G) CC (T98) 1.6 Dualfuel, VAUXHALL Astra Mk IV (G) CC (T98) 2.0, VAUXHALL Astra Mk IV (G) CC (T98) 1.4 16V Dualfuel (F08, F48), (+ 2)

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: OPEL Astra G CC (T98) 1.2 16V (F08, F48)

REPLACEMENT: BRAKE HOSE – VAUXHALL ASTRA MK IV (G) CC (T98). TOOLS YOU'LL NEED:



- Wire brush
- Brake cleaner
- Copper grease
- Combination spanner #9
- Combination spanner #10
- Drive socket # 11
- Wheel impact socket #17
- Ratchet wrench
- Torque wrench
- Brake bleeder kit
- Crow bar
- Rubber mallet
- Hammer
- Fluid container
- Wheel chock

Buy tools

Replacement: brake hose – VAUXHALL Astra Mk IV (G) CC (T98). AUTODOC experts recommend:

- The replacement procedure is identical for the right and left brake hoses on the same axle.
- All work should be done with the engine stopped.

REPLACEMENT: BRAKE HOSE – VAUXHALL ASTRA MK IV (G) CC (T98). TAKE THE FOLLOWING STEPS:

1 Open the bonnet. Unscrew the brake fluid reservoir cap.

2 Secure the wheels with chocks.



3 Loosen the wheel mounting bolts. Use wheel impact socket #17.



4 Raise the front of the car and secure on supports.

5

Unscrew the wheel bolts.



Replacement: brake hose – VAUXHALL Astra Mk IV (G) CC (T98). AUTODOC recommends:

- To avoid injury, hold up the wheel when unscrewing the bolts.

6

Remove the wheel.




7


Clean the area where the brake hose is connected to the brake caliper and to the brake circuit pipe. Use a wire brush.




8 Remove the fastener attaching the brake hose to the shock strut. Use a crowbar. Use a hammer.

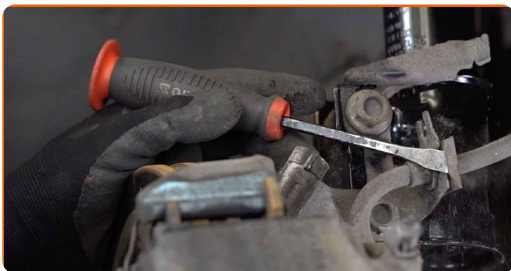


9 Detach the brake hose from the shock strut.

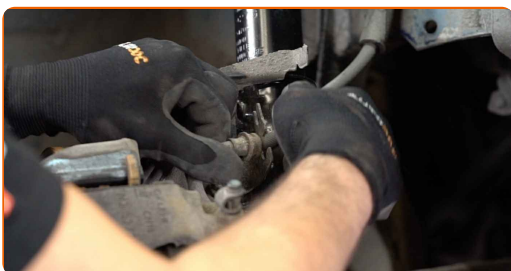

10 Put a container for gathering brake fluid beneath.

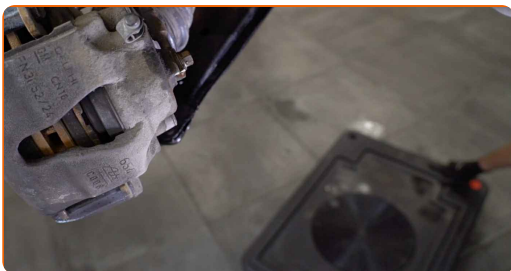


11 Unscrew the fastener connecting the brake hose to the brake circuit pipe. Use a combination spanner #10.

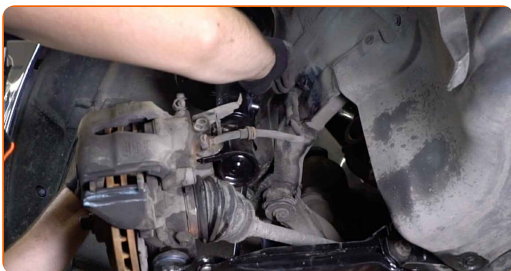


12

Unscrew the brake hose from the brake caliper. Use a drive socket #11. Use a ratchet wrench.

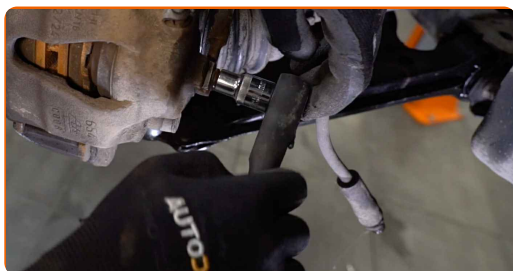

13

Install the sealing ring on the new brake hose.

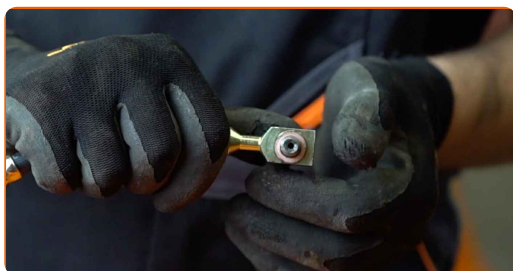

14

Clean dirt from the brake hose bolt. Use a brake cleaner.



AUTODOC recommends:

- Replacement: brake hose – VAUXHALL Astra Mk IV (G) CC (T98). After applying the spray, wait a few minutes.

- 15** Tighten the fastener connecting the brake pipe to the brake caliper. Use a drive socket #11. Use a ratchet wrench. Use a torque wrench. Tighten it to 35 Nm torque.




- 16** Clean the brake hose mounting seat on the brake circuit pipe. Use a brake cleaner.



Replacement: brake hose – VAUXHALL Astra Mk IV (G) CC (T98). Tip:

- After applying the spray, wait a few minutes.

- 17** Screw the brake hose onto the brake circuit pipe. Use a combination spanner #10. Use a torque wrench. Tighten it to 16 Nm torque.

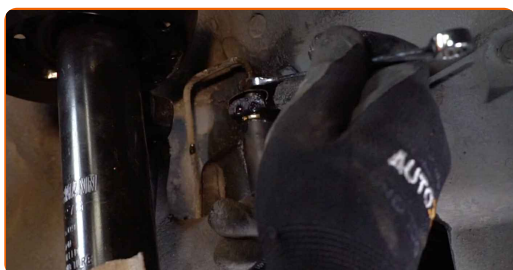

- 18** Clean the area where the brake hose is connected to the brake caliper and to the brake circuit pipe. Use a brake cleaner.



AUTODOC recommends:

- Replacement: brake hose – VAUXHALL Astra Mk IV (G) CC (T98). After applying the spray, wait a few minutes.


- 19** Fasten the brake hose on the strut.




- 20** Install the brake hose retaining clip. Use a rubber mallet.




- 21** Connect the brake bleeder kit to the brake bleeder screw.

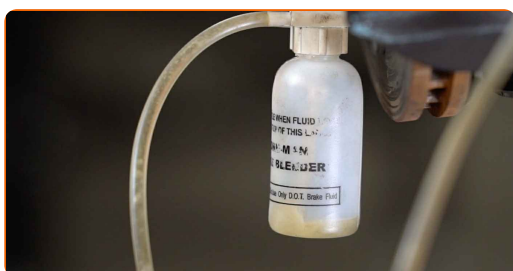


22 Undo the brake bleeder screw. Use a combination spanner #9.

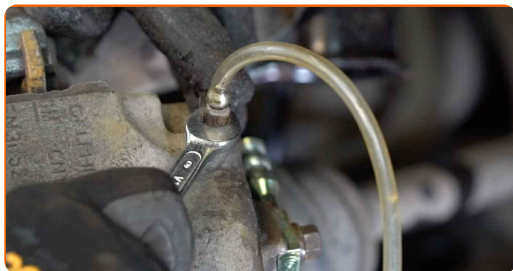

23 Press the brake pedal several times to remove any air from the system.

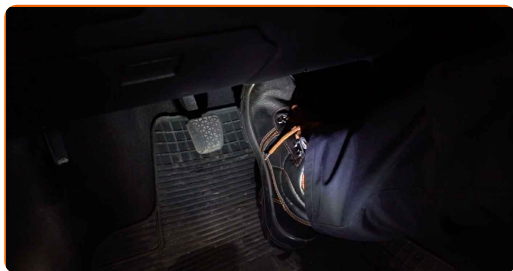

24 Tighten the brake bleeder screw. Use a combination spanner #9.

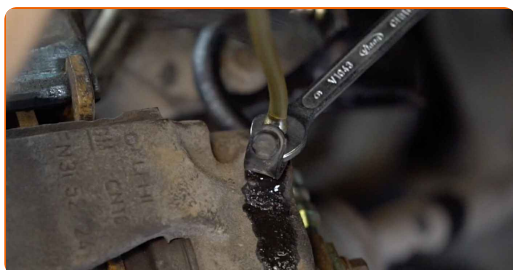

25 Disconnect the brake bleeder kit.

26 Clean the brake disk surface. Use a wire brush. Treat the surface where the brake disc contacts the wheel rim. Use copper grease.



27 Install the wheel.




AUTODOC recommends:

- Important! Hold the wheel while screwing in the fastening bolts. VAUXHALL Astra Mk IV (G) CC (T98)

28 Screw in the wheel bolts. Use wheel impact socket #17.



29 Lower the car and working in a cross order, tighten the wheel bolts. Use a torque wrench. Tighten it to 110 Nm torque.

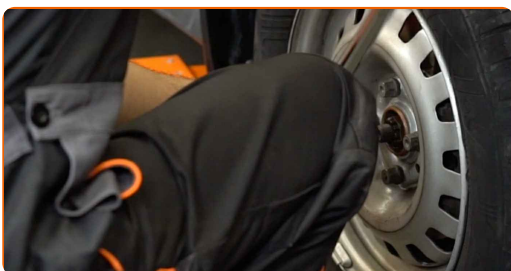

30 Remove the jacks and chocks.



31 Check the brake fluid level in the expansion tank and refill if necessary.

32 Tighten the brake fluid reservoir cap. Close the hood.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BRAKE HOSE: A WIDE SELECTION

i DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.