



How to change wheel
cylinder on **VAUXHALL**
Cavalier Mk II CC (J82) –
replacement guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!

This replacement procedure can be used for:
VAUXHALL Cavalier Mk II CC (J82) 2.0 SRi 130

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: OPEL Corsa B Hatchback (S93) 1.4 i (F08, F68, M68)

REPLACEMENT: WHEEL CYLINDER – VAUXHALL CAVALIER MK II CC (J82). TOOLS YOU'LL NEED:



- Wire brush
- WD-40 spray
- Copper grease
- Drive socket # 10
- Combination spanner #9
- Combination spanner #24
- Flare Nut Wrench Nº 10
- Wheel impact socket #17
- Ratchet wrench
- Torque wrench
- Round-nose pliers
- Rubber mallet
- Flat Screwdriver
- Crow bar
- Wheel chock

Buy tools

Replacement: wheel cylinder – VAUXHALL Cavalier Mk II CC (J82). AUTODOC experts recommend:

- Replace the wheel brake cylinders of the rear drum brakes in pairs.
- The replacement procedure is identical for the right and left wheel brake cylinders of the rear drum brakes.
- All work should be done with the engine stopped.

REPLACEMENT: WHEEL CYLINDER – VAUXHALL CAVALIER MK II CC (J82). RECOMMENDED SEQUENCE OF STEPS:

1

Secure the wheels with chocks.



2

Loosen the wheel mounting bolts. Use wheel impact socket #17.



3

Raise the rear of the car and secure on supports.

4 Unscrew the wheel bolts.



Replacement: wheel cylinder – VAUXHALL Cavalier Mk II CC (J82). Tip from AUTODOC:

- To avoid injury, hold up the wheel when unscrewing the bolts.

5 Remove the wheel.



6 Remove the hub bearing protection cap. Use a flat screwdriver.




7 Remove the cotter pin securing the hub nut. Use round-nose pliers.



8

Unscrew the wheel hub axle nut. Use a combination spanner #24.

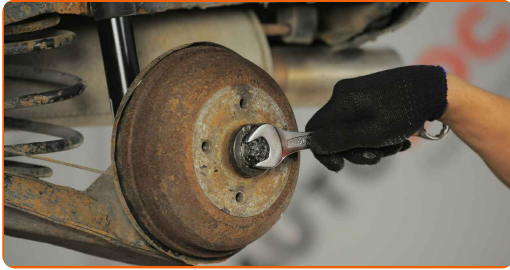

9

Remove the brake drum.



Replacement: wheel cylinder – VAUXHALL Cavalier Mk II CC (J82).
Professionals recommend:


- Examine the brake drum. Replace it if necessary.

10

Unscrew the fastener connecting the brake pipe to the wheel cylinder. Use a flare nut spanner #10.

11

Detach the brake pipe.

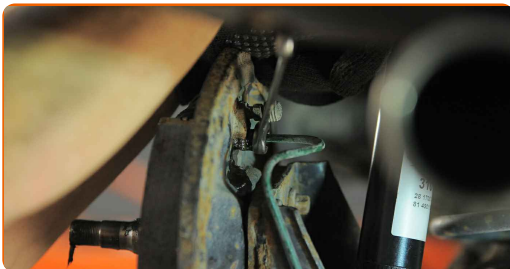


Replacement: wheel cylinder – VAUXHALL Cavalier Mk II CC (J82). AUTODOC recommends:

- Immediately plug the brake line open end to prevent fluid leakage and ingress of dirt into the hydraulic system.


12

Unscrew the wheel cylinder fastener. Use a drive socket #10. Use a ratchet wrench.

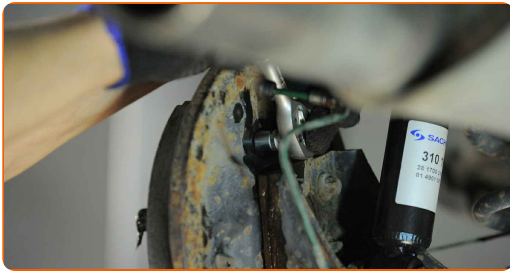

13

Remove the brake cylinder from the backplate. Use a crowbar.

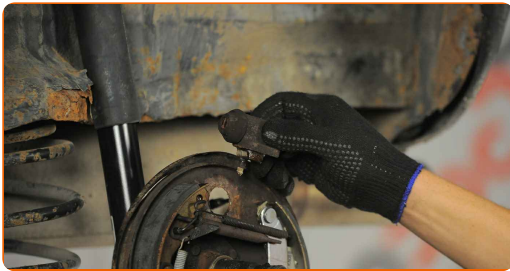

14


Clean the brake drum. Use a wire brush. Use WD-40 spray.

15


Clean the brake pipe attachment spot and the brake drum fastening bolts on VAUXHALL Cavalier Mk II CC (J82).




16 Install a new brake cylinder.

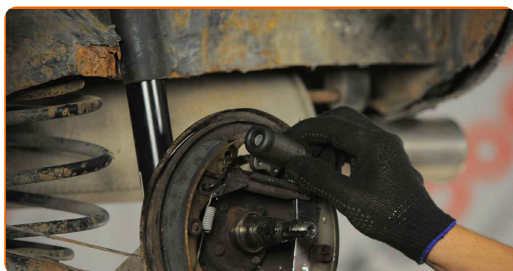


17 Tighten the wheel cylinder fastener. Use a drive socket #10. Use a torque wrench. Tighten it to 10 nm torque.

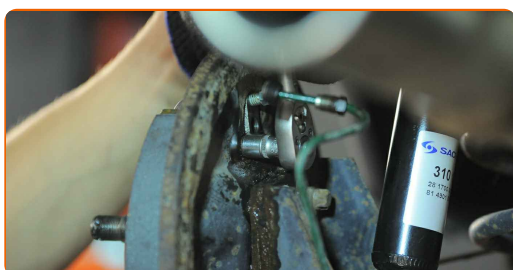

18 Attach the brake pipe. Use a flare nut spanner #10.

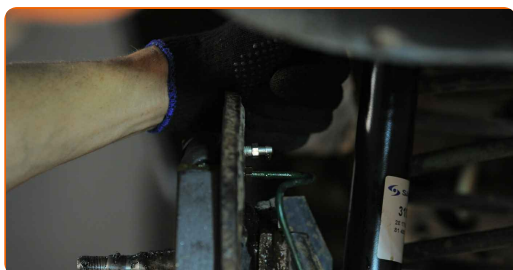

19 Bleed the brake cylinder system. Use a combination spanner #9.

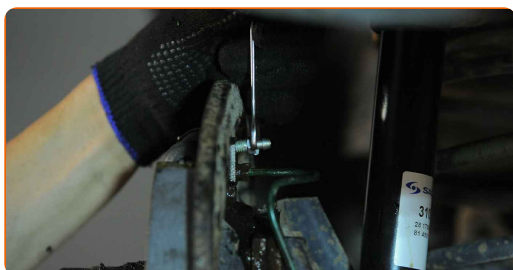

Replacement: wheel cylinder – VAUXHALL Cavalier Mk II CC (J82). Tip:

- Make sure to set the protection cap on the bleeder valve.

20 Tighten the fastener connecting the brake pipe to the wheel cylinder. Use a flare nut spanner #10. Use a torque wrench. Tighten it to 15 nm torque.

21 Clean the hub. Use a wire brush. Treat the contacting surface. Use copper grease.

22 Install a brake drum.



23 Screw in the wheel hub fastener. Use a combination spanner #24. Use a ratchet wrench.



24 Install the cotter pin of the hub bearing fastening nut. Use round-nose pliers.



25 Install the hub bearing protection cap. Use a rubber mallet.



- 26 Clean the wheel rim mounting seat. Use a wire brush. Treat the surface where the wheel rim contacts the brake drum. Use copper grease.



- 27 Install the wheel.



Replacement: wheel cylinder – VAUXHALL Cavalier Mk II CC (J82). AUTODOC experts recommend:

- To avoid injury, hold up the wheel when screwing in the fastening bolts.

- 28 Screw in the wheel bolts. Use wheel impact socket #17.




29

Lower the car and working in a cross order, tighten the wheel bolts. Use wheel impact socket #17. Use a torque wrench. Tighten it to 110 nm torque.



30

Remove the jacks and chocks.

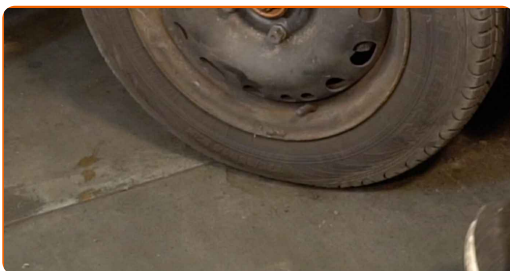

AUTODOC recommends:

- Bleed the brake system after replacing the cylinder on VAUXHALL Cavalier Mk II CC (J82).
- Important! Replacement: wheel cylinder – VAUXHALL Cavalier Mk II CC (J82). Check the brake fluid level in the reservoir and top up if necessary.
- Perform test braking when driving at an average speed, the VAUXHALL Cavalier Mk II CC (J82) should not pull to one side.

- 31** Adjust the gap between the brake shoes and the drum on VAUXHALL Cavalier Mk II CC (J82), pressing the brake pedal 10-15 times.



WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

 Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

WHEEL CYLINDER: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.