



How to change fuel filter
on **Mercedes Vito W639**
– replacement guide

VIDEO TUTORIAL




Important!

This replacement procedure can be used for:

MERCEDES-BENZ G-Class Off-Road (W461) G 280 CDI (461.304, 461.346, 461.370, 461.334, 461.339,...), MERCEDES-BENZ SPRINTER 3,5-t Bus (906) 318 CDI 3.0 (906.731, 906.733, 906.735), MERCEDES-BENZ SPRINTER 3,5-t Platform/Chassis (906) 313 CDI 2.2 4x4 (906.131, 906.133, 906.135), MERCEDES-BENZ C-Class T-modell (S203) C 220 CDI (203.208), MERCEDES-BENZ VITO / MIXTO Box (W639) 122 CDI 3.0, MERCEDES-BENZ VITO Bus (W639) 122 CDI 3.0, MERCEDES-BENZ VIANO (W639) CDI 3.0 (639.811, 639.813, 639.815), MERCEDES-BENZ A-Class (W169) A 200 CDI (169.308, 169.008), MERCEDES-BENZ E-Class T-modell (S211) E 220 T CDI, MERCEDES-BENZ E-Class Saloon (W211) E 220 CDI, MERCEDES-BENZ S-Class Saloon (W221) S 350 CDI, MERCEDES-BENZ SPRINTER 2-t Bus (901, 902) 216 CDI 2.7, MERCEDES-BENZ SPRINTER 3-t Bus (903) 316 CDI 2.7, MERCEDES-BENZ SPRINTER 2-t Box (901, 902) 216 CDI 2.7, MERCEDES-BENZ SPRINTER 2-t Platform/Chassis (901, 902) 216 CDI 2.7, (+ 178)

The steps may slightly vary depending on the car design.

**REPLACEMENT: FUEL FILTER – MERCEDES VITO W639.
TOOLS YOU'LL NEED:**

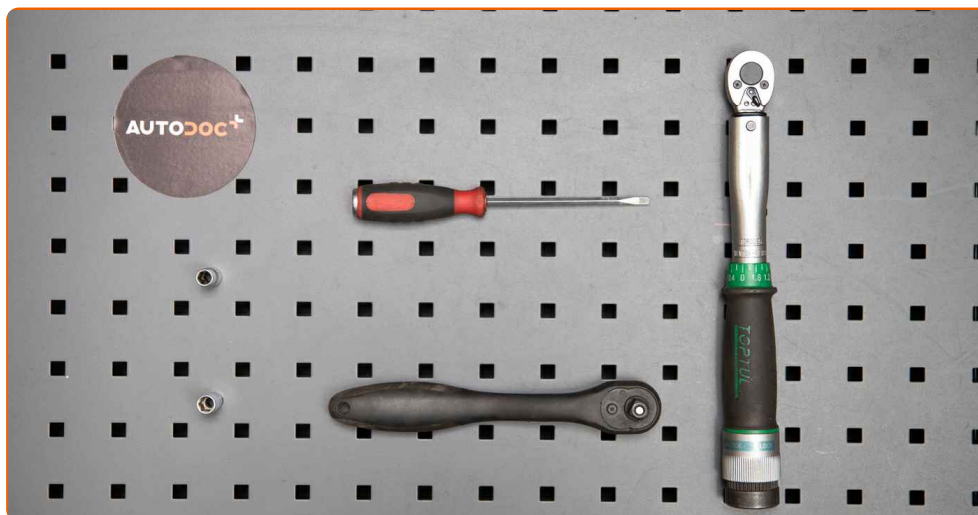

- Torque wrench
- Impact socket №7
- Impact socket №8
- Flat Screwdriver
- Ratchet wrench
- Fluid container
- Fender cover


BUY TOOLS

Replacement: fuel filter – Mercedes Vito W639. Tip from AUTODOC:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- Please note: all work on the car – Mercedes Vito W639 – should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1 Open the bonnet.

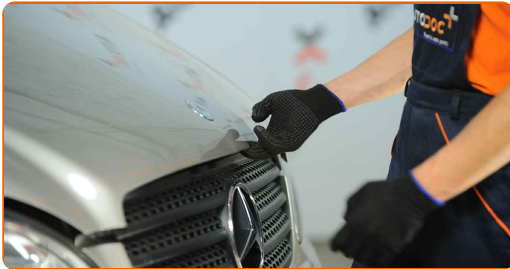


2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.


3 Prepare a container for fluids.



4 Loosen the fuel filter mounting. Use a drive socket #8. Use a ratchet wrench.

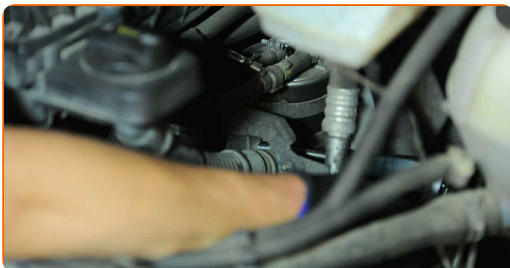


- 5** Loosen the fastening clamps of the fuel filter pipes. Use a flat screwdriver. Use a drive socket #7. Use a ratchet wrench.

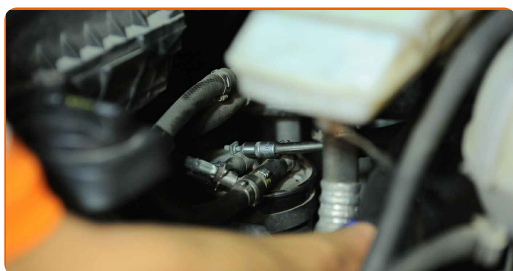

Replacement: fuel filter – Mercedes Vito W639. AUTODOC experts recommend:

- Be careful! Fuel may leak from the filter housing and hoses.

- 6** Detach the tubes from the fuel filter. Use a flat screwdriver.

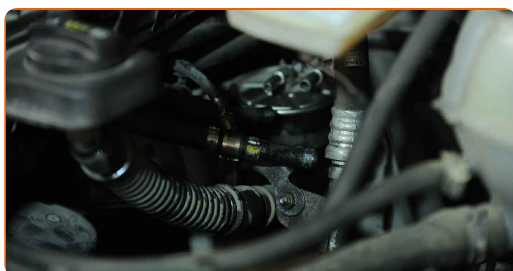

- 7** Remove the fuel filter.



- 8** Install a new fuel filter.




Replacement: fuel filter – Mercedes Vito W639. Tip from AUTODOC experts:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Attention! Use quality filters – Mercedes Vito W639.

9

Attach the tubes to the fuel filter.

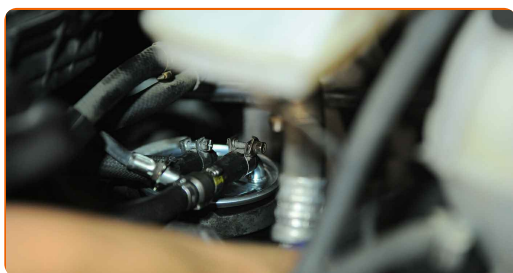


10

Tighten the fastening clamps of the fuel filter pipes. Use a drive socket #7. Use a ratchet wrench.



11

Tighten the fuel filter fasteners. Use a drive socket #8. Use a torque wrench. Tighten it to 5 Nm torque.

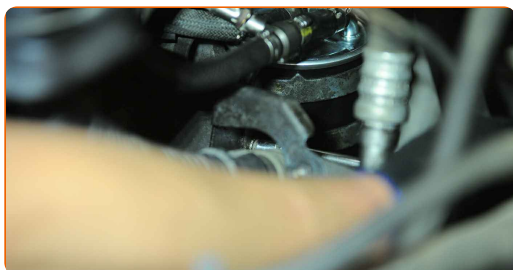


12 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.



13 Shut off the engine.

14 Remove the fender protection cover.

15 Close the hood.

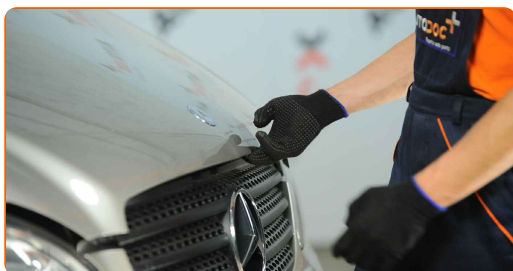

Replacement: fuel filter – Mercedes Vito W639. AUTODOC experts recommend:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON  **Google Play**

 **Download on the App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR MERCEDES

FUEL FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR MERCEDES VITO W639

FUEL FILTER FOR MERCEDES: BUY NOW

**FUEL FILTER FOR MERCEDES VITO W639: THE BEST DEALS
& OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.