



How to change tailgate
struts on **Opel Vivaro A**
van – replacement guide

VIDEO TUTORIAL




i Important!

This replacement procedure can be used for:

OPEL Vivaro A Combi (X83) 1.9 DI (F7, J7, A07), OPEL Vivaro A Combi (X83) 1.9 DTI (F7, J7, A07), OPEL Vivaro A Van (X83) 1.9 DI (F7), OPEL Vivaro A Van (X83) 1.9 DTI (F7), OPEL Vivaro A Combi (X83) 2.0 16V (F7, J7, A07), OPEL Vivaro A Van (X83) 2.0 16V (F7), OPEL Vivaro A Combi (X83) 2.5 DTI (F7, J7, A07), OPEL Vivaro A Van (X83) 2.5 DTI (F7), OPEL Vivaro A Combi (X83) 2.0 CDTI (F7, J7, A07), OPEL Vivaro A Combi (X83) 2.5 CDTI (F7, J7, A07), OPEL Vivaro A Combi (X83) 2.0 ECOTEC (F7, A07, J7), OPEL Vivaro A Van (X83) 2.0 ECOTEC (F7), OPEL Vivaro A Van (X83) 2.0 CDTI (F7), OPEL Vivaro A Van (X83) 2.5 CDTI (F7), OPEL Vivaro B Combi (X82) 1.6 CDTI (06), (+ 1)

The steps may slightly vary depending on the car design.

REPLACEMENT: TAILGATE STRUTS – OPEL VIVARO A VAN. TOOLS YOU'LL NEED:

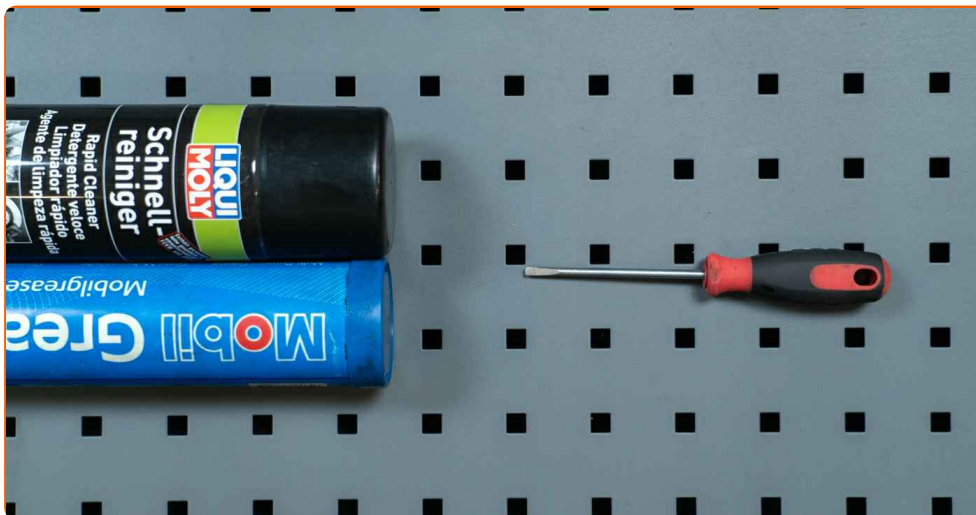

- All-purpose cleaning spray
- Multipurpose grease
- Slotted screwdriver
- Transmission jack

[BUY TOOLS](#)

Replacement: tailgate struts – Opel Vivaro A van. AUTODOC experts recommend:

- Replace both rear door gas struts together.
- The replacement procedure is identical for the left and right rear door gas struts.
- All the work should be carried out with the ignition switched off.

REPLACEMENT: TAILGATE STRUTS – OPEL VIVARO A VAN. USE THE FOLLOWING PROCEDURE:


1

Open the rear door.




2

Prop up the rear door. Use a transmission jack.

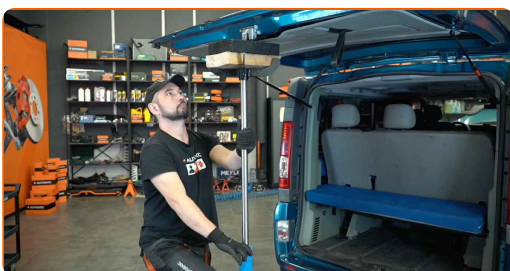


3

Release the retaining clip connecting the right gas strut to the rear door. Use a slotted screwdriver.

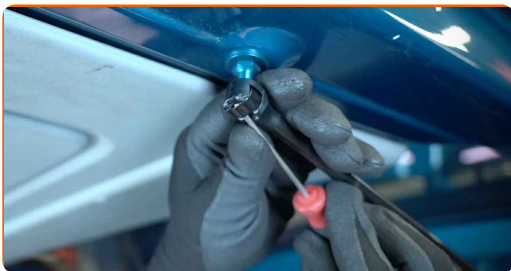


4

Release the retaining clip connecting the right gas strut to the vehicle body. Use a slotted screwdriver.

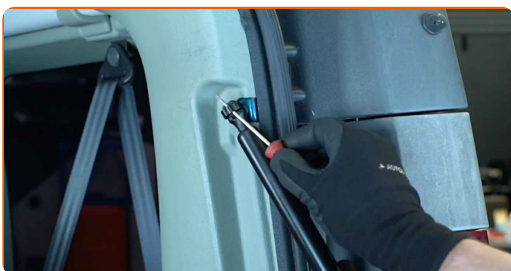


5

Remove the right gas strut of the rear door.

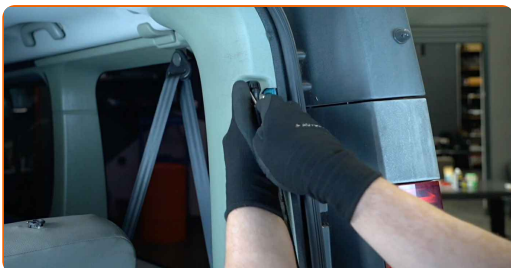


6

Clean the mounting seats of the right gas strut. Use an all-purpose cleaning spray.

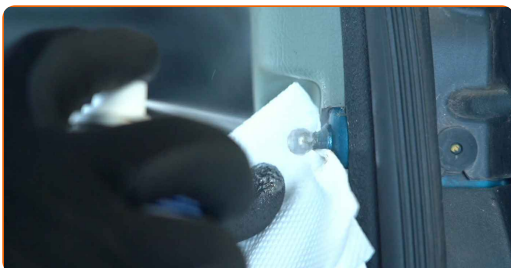


7

Release the retaining clip connecting the left gas strut to the rear door. Use a slotted screwdriver.

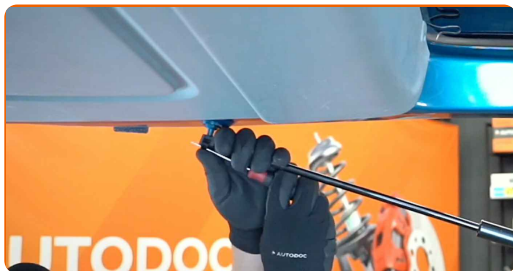


8

Release the retaining clip connecting the left gas strut to the vehicle body. Use a slotted screwdriver.

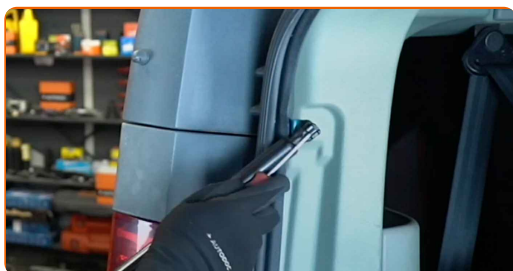

9

Remove the left gas strut of the rear door.

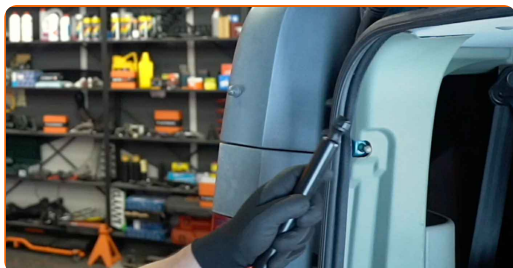


10

Clean the mounting seats of the left gas strut. Use an all-purpose cleaning spray.




- 11** Apply grease to the ball sockets of the new gas struts if they are not sold pregreased. Use multipurpose grease.

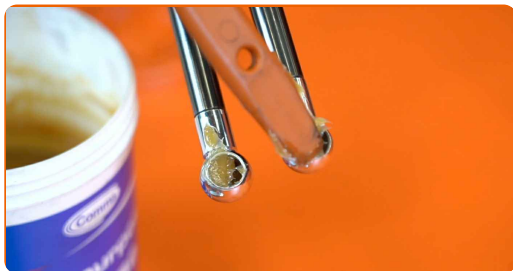


- 12** Install the new right gas strut on the rear door.




- 13** Snap on the retaining clip connecting the right gas strut to the vehicle body.

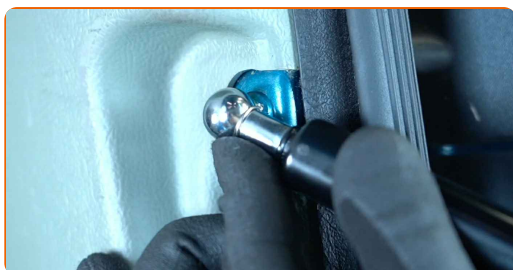

- 14** Snap on the retaining clip connecting the right gas strut to the rear door.

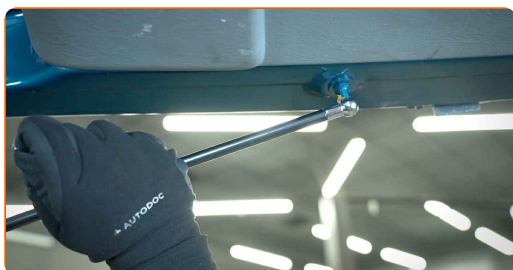

- 15** Install the new left gas strut on the rear door.

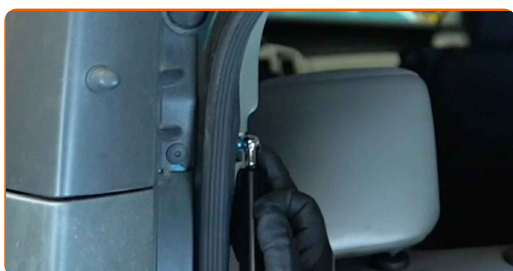


- 16 Snap on the retaining clip connecting the left gas strut to the car body.



- 17 Snap on the retaining clip connecting the left gas strut to the rear door.



- 18 Remove the transmission jack from under the rear door.

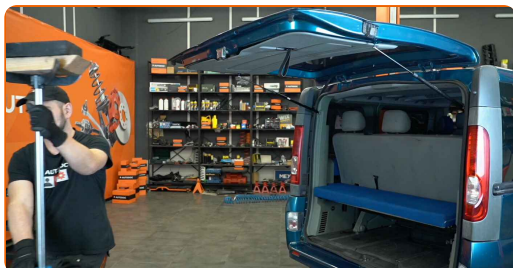

Replacement: tailgate struts – Opel Vivaro A van. AUTODOC recommends:

- Remove the transmission jack carefully, supporting the rear door with your hand until you are sure that the new gas struts hold it securely.

19

Check that the new components are working.


**20**

Close the rear door.

**WELL DONE!** **[VIEW MORE TUTORIALS](#)**

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

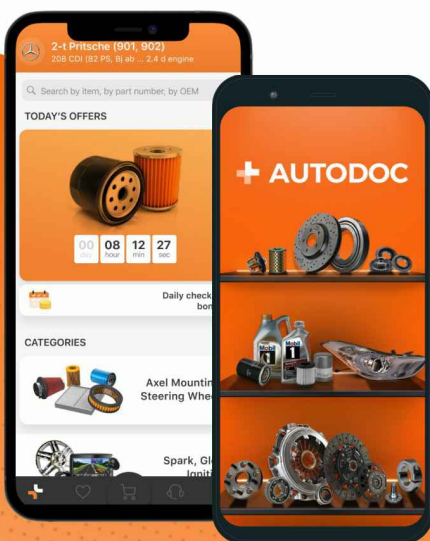

+ AUTODOC

GET IT ON
 Google Play

 Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR OPEL

TAILGATE STRUTS: A WIDE SELECTION

CHOOSE CAR PARTS FOR OPEL VIVARO A VAN

TAILGATE STRUTS FOR OPEL: BUY NOW

**TAILGATE STRUTS FOR OPEL VIVARO A VAN: THE BEST
DEALS & OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2025 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.