



How to change pollen
filter on **VW New Beetle
Hatchback (9C1, 1C1)** –
replacement guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!

This replacement procedure can be used for:

VW New Beetle Hatchback (9C1, 1C1) 2.0, VW New Beetle Hatchback (9C1, 1C1) 1.9 TDI, VW New Beetle Hatchback (9C1, 1C1) 1.6, VW New Beetle Hatchback (9C1, 1C1) 1.8 T, VW New Beetle Hatchback (9C1, 1C1) RSI 3.2 4motion (1C9), VW New Beetle Hatchback (9C1, 1C1) 2.3 V5, VW New Beetle Hatchback (9C1, 1C1) 1.4, VW New Beetle Hatchback (9C1, 1C1) 2.5

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: VW Golf IV Hatchback (1J1) 1.6

REPLACEMENT: POLLEN FILTER – VW NEW BEETLE
HATCHBACK (9C1, 1C1). TOOLS YOU MIGHT NEED:



• Phillips screwdriver

• Fender cover

[Buy tools](#)

Replacement: pollen filter – VW New Beetle Hatchback (9C1, 1C1). AUTODOC experts recommend:


- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- All work should be done with the engine stopped.

REPLACEMENT: POLLEN FILTER – VW NEW BEETLE HATCHBACK (9C1, 1C1). RECOMMENDED SEQUENCE OF STEPS:

1 Open the hood.

2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3 Unscrew the fasteners of the cabin filter housing cover. Use a Phillips screwdriver.

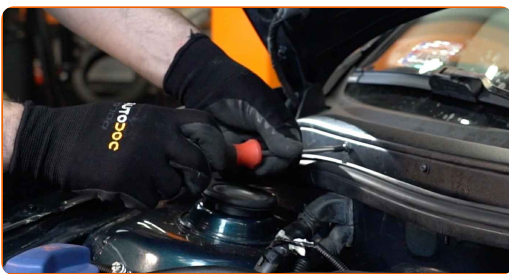

4 Remove the rubber strip.



5 Remove the cabin filter housing cover.



AUTODOC recommends:

- Replacement: pollen filter – VW New Beetle Hatchback (9C1, 1C1). To avoid damaging the part when removing it, do not use excessive force.

6 Remove the cabin air filter housing.



7 Remove the cabin filter.

**Replacement: pollen filter – VW New Beetle Hatchback (9C1, 1C1).
Professionals recommend:**

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

8

Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.



Replacement: pollen filter – VW New Beetle Hatchback (9C1, 1C1). Tip from AUTODOC:

- Check out the correct location of the filter element. Do not skew.
- Attention! Use quality filters – VW New Beetle Hatchback (9C1, 1C1).

9

Install the cabin air filter housing.



Replacement: pollen filter – VW New Beetle Hatchback (9C1, 1C1). AUTODOC experts recommend:

- Follow the air flow direction arrow on the filter.


10 Reinstall the cabin filter housing cover.



11 Screw in the fasteners of the cabin filter housing cover. Use a Phillips screwdriver.



12 Install the rubber strip.

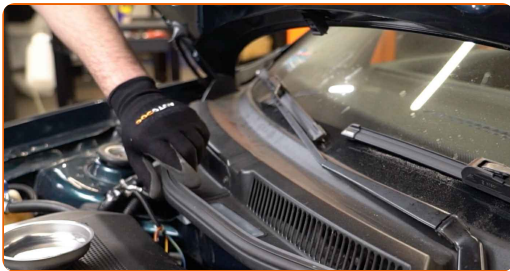

13 Remove the fender protection cover.

14 Close the hood.

15 Switch on the ignition.

16 Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.

17 Switch off the ignition.

WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



AUTODOC

GET IT ON
 **Google Play**

Download on the
 **App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

POLLEN FILTER: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2021 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.