

How to change fuel filter on VW Passat B5 Estate (3B5) petrol – replacement guide





SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

(i) Important!

This replacement procedure can be used for:


VW Passat B5 Estate (3B5) 1.6, VW Passat B5 Estate (3B5) 1.8, VW Passat B5 Estate (3B5) 1.8 T, VW Passat B5 Estate (3B5) 2.3 VR5, VW Passat B5 Estate (3B5) 2.8 V6, VW Passat B5 Estate (3B5) 2.8 V6 Syncro/4motion, VW Passat B5 Estate (3B5) 1.8 Syncro/4motion, VW Passat B5 Estate (3B5) 2.3 VR5 Syncro/4motion, VW Passat B5 Estate (3B5) 2.0, VW Passat B5 Estate (3B5) 2.0 4motion

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: VW Golf III Hatchback (1H1) 1.4





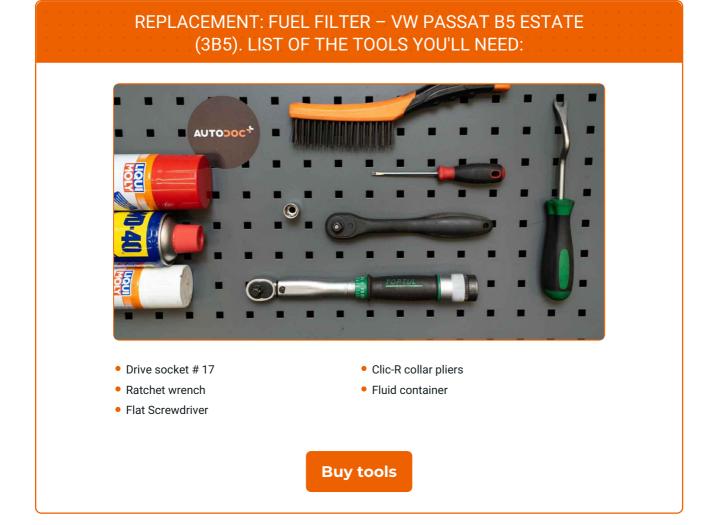





Replacement: fuel filter – VW Passat B5 Estate (3B5). Tip from AUTODOC experts:

• Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.

• All work should be done with the engine stopped.

REPLACEMENT: FUEL FILTER – VW PASSAT B5 ESTATE (3B5). USE THE FOLLOWING PROCEDURE:



Lift the car using a jack or place it over an inspection pit.



Unscrew the fuel filter bracket fixing bolts. Use a drive socket #17. Use a ratchet wrench.



3

Remove the fuel filter together with its bracket.



4

Prepare a container for fluids.







5

Loosen the fuel supply lines fastening to the fuel filter. Use a flat screwdriver.



Replacement: fuel filter - VW Passat B5 Estate (3B5). Tip:

• Be careful! Fuel may leak from the filter housing and hoses.



Disconnect the fuel supply lines from the fuel filter. Use a flat screwdriver.



7

Remove the fuel filter. Use a flat screwdriver.



8

Install a new fuel filter.







Replacement: fuel filter - VW Passat B5 Estate (3B5). AUTODOC recommends:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Take care to only use quality filters.



Connect the fuel supply lines to the new fuel filter.



10

Install the new fuel filter together with its bracket.





Tighten the fuel supply line fastening. Use clic-R collar pliers.









Take the fluid container away from under the fuel filter.




Screw the fixing bolts of the fuel filter bracket. Use a drive socket #17. Use a ratchet wrench.



14

Lower the car.

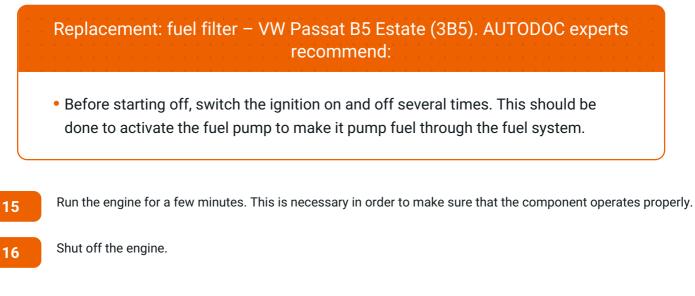



VIEW MORE TUTORIALS





AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE



A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

FUEL FILTER: A WIDE SELECTION

(i) **DISCLAIMER**:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.