




How to change
serpentine belt on
Toyota Yaris P1 –
replacement guide

VIDEO TUTORIAL

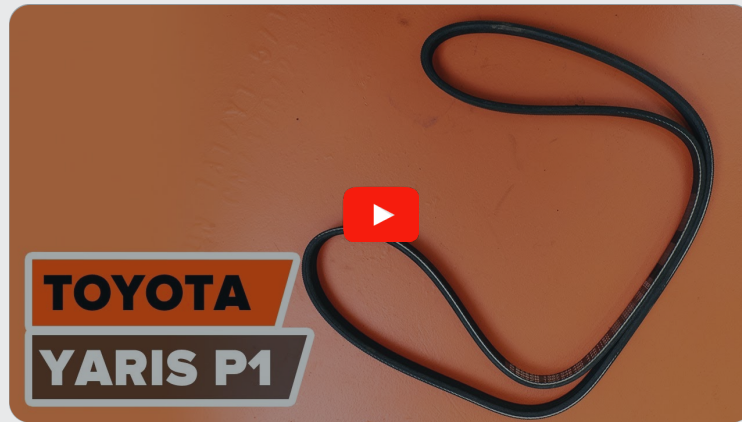

Important!

This replacement procedure can be used for:

TOYOTA Yaris Verso (_P2_) 1.5, TOYOTA Yaris Hatchback (_P1_) 1.5 (NCP13_), TOYOTA Yaris Hatchback (_P1_) 1.4 D-4D (NLP10_), TOYOTA Yaris Verso (_P2_) 1.4 D-4D, TOYOTA Yaris Verso (_P2_) 1.3, TOYOTA COROLLA Saloon (_E12J_, _E12T_) 1.3 (NZE120_)

The steps may slightly vary depending on the car design.

REPLACEMENT: SERPENTINE BELT – TOYOTA YARIS P1. LIST OF THE TOOLS YOU'LL NEED:



- Torque wrench
- Combination spanner #12
- Combination spanner #19
- Drive socket # 12
- Crow bar
- Fender cover

BUY TOOLS

Replacement: serpentine belt – Toyota Yaris P1. Tip from AUTODOC:

- All work should be done with the engine stopped.

REPLACEMENT: SERPENTINE BELT – TOYOTA YARIS P1. RECOMMENDED SEQUENCE OF STEPS:

1

Open the bonnet.




2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.


3

Loosen the alternator fasteners. Use a combination spanner #12.

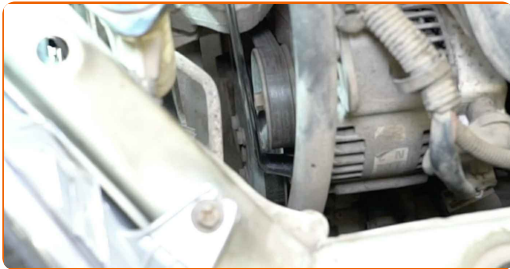


4


Loosen the tensioner lever of the V-ribbed belt. Use a combination spanner #12.

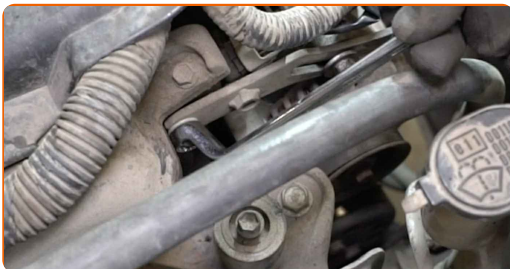


5 Loosen the serpentine belt.

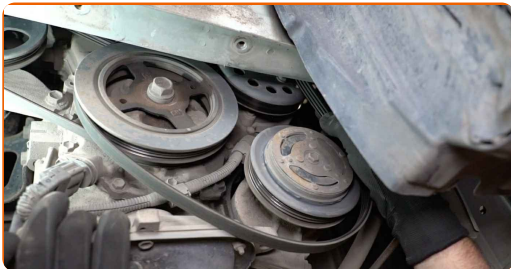

6 Remove the V-ribbed belt.

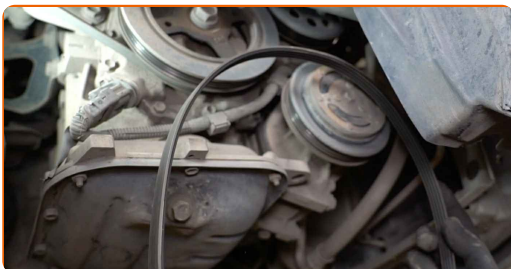


7 Install the V-ribbed belt.

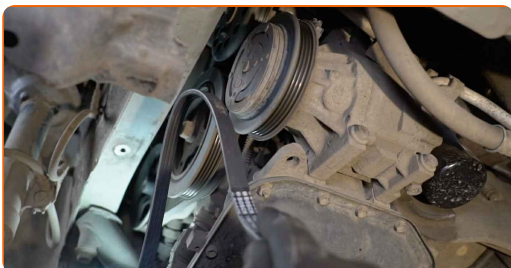

Replacement: serpentine belt – Toyota Yaris P1. Tip from AUTODOC experts:

- Make sure that the V-ribbed belt fits all pulleys snugly.

8 Turn the crankshaft pulley. Use a combination spanner #19.

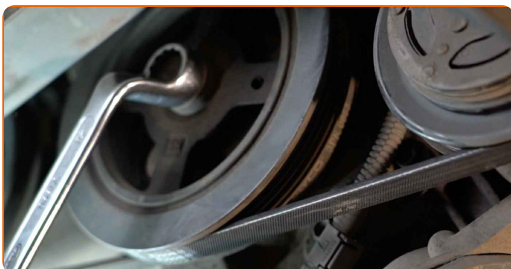


- 9 Place the V-ribbed belt on the alternator. Use a crowbar.

Replacement: serpentine belt – Toyota Yaris P1. Tip:

- Make sure that the V-ribbed belt is properly tensioned.


- 10 Tighten the tensioner lever of the V-ribbed belt. Use a combination spanner #12.

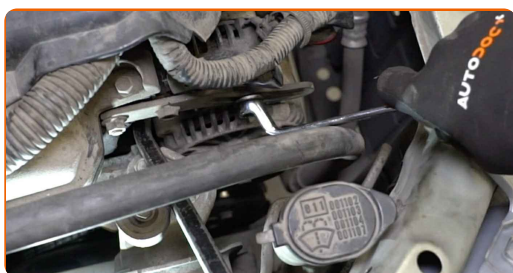

- 11 Tighten the alternator fasteners. Use a drive socket #12. Use a torque wrench. Tighten it to 15 Nm torque.



- 12 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

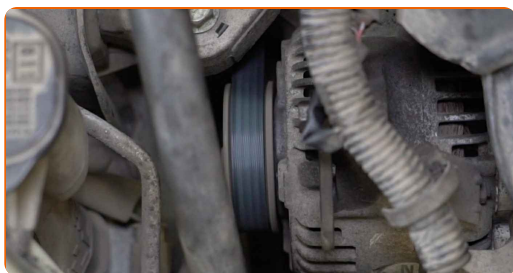

- 13 Shut off the engine.

- 14 Remove the fender protection cover.

15

Close the hood.



WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR TOYOTA

SERPENTINE BELT: A WIDE SELECTION

CHOOSE CAR PARTS FOR TOYOTA YARIS P1

SERPENTINE BELT FOR TOYOTA: BUY NOW

**SERPENTINE BELT FOR TOYOTA YARIS P1: THE BEST DEALS
& OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.