

### Carry out replacement in the following order:




Use a torque wrench to replace spark plugs.

1



Remove the engine cover

2.1

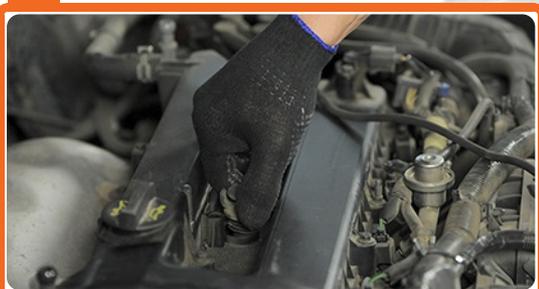

Disconnect the high voltage wires from the spark plugs.

2.2



3.1



Remove the spark plugs with a spark plug wrench and place them on a work surface in the order of installing in the engine.

3.2



**i** AutoDoc recommends:

Unscrew the spark plugs in your Ford Mondeo III car only when the engine is cold. When removing the spark plugs on a warm engine you can damage the threads in the spark mounting spots on the cylinder head made of light alloy metal.

**i** AutoDoc recommends:

Be careful when working with a spark plug wrench. Its skewing can cause damage to the threaded connection.

Don't tighten the plugs with excessive force. Exceeding tightening torque can damage the thread connection.

4



Screw new spark plugs and tighten them.

5



Connect the high voltage wires to the spark plugs.

6



Install the engine cover and secure it.

**▶** [Video tutorials](#)

Watch our detailed video guides about your FORD MONDEO III repair on our youtube channel. Watch video guides.

**🛒** [AutoDoc online](#)

Highest quality spark plugs for your car FORD MONDEO III are available on AutoDoc. Go to the website.

We hope that this information  
have been useful for you!

**AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE**

**QUALITY AUTO PARTS**



**FORD**



**SPARK PLUGS**



**FORD MONDEO III**



**SPARK PLUGS FOR FORD**



**SPARK PLUGS FOR FORD MONDEO III**



**Disclaimer:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement works. AutoDoc shall not be liable for any loss, injury, damage of property, acquired in the repair or replacement process due to incorrect usage or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for informative purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

**AUTODOC IN SOCIAL MEDIA**

