

### Carry out replacement in the following order:




Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.

Before replacing the filter on the Opel Corsa C make sure that the fuel tank is filled no more than 3/4 of its volume.

1


Lift the car and set it on jack stands.

2

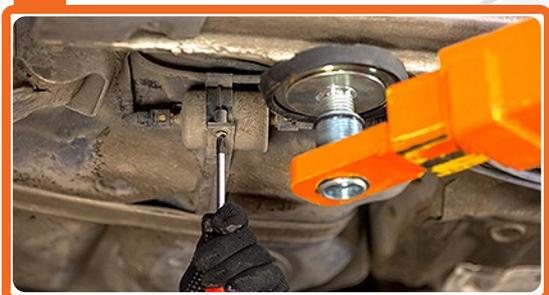

Loosen the filter fastenings.

3

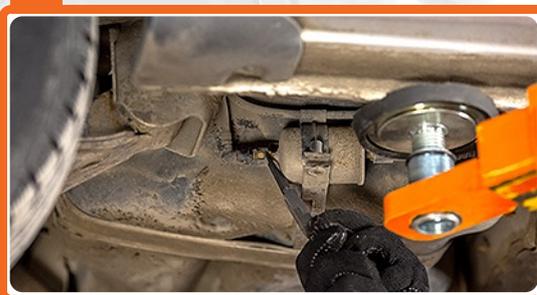

Disconnect the fuel supply lines from the fuel filter.

4



Remove the fuel filter

#### AutoDoc recommends:

Place a cloth under the filter installation spot.

Fuel supply line is pressurized! Before opening the hose connection cover it with a thick cloth. Then reduce the pressure by careful disconnection of the hose. Wear protective glasses.

5



Install a new fuel filter.

**i** **AutoDoc recommends:**

Remember, it is important not to mix up the input and output of the filter. Arrows on the filter indicate the direction of fuel flow.

6



Connect the fuel supply lines to the fuel filter and tighten the fasteners.

7



Fasten the fuel filter in the holder.

We hope that this information  
have been useful for you!

**▶** [Video tutorials](#)

Watch our detailed video guides about your Opel Corsa C repair on our youtube channel. Watch video guides.

**🛒** [AutoDoc online](#)

Highest quality fuel filters for your car Opel Corsa C are available on AutoDoc. Go to the website.

## AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

### QUALITY AUTO PARTS



### OPEL



### FUEL FILTERS



### OPEL CORSA C



### FUEL FILTERS FOR OPEL



### FUEL FILTERS FOR OPEL CORSA C



### **i** Disclaimer:

The document contains only general recommendations that may be useful for you when you perform repair or replacement works. AutoDoc shall not be liable for any loss, injury, damage of property, acquired in the repair or replacement process due to incorrect usage or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for informative purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

### AUTODOC IN SOCIAL MEDIA

