

Carry out replacement in the following order:



Use a torque wrench to replace spark plugs.

1



Open the hood

2.1



Disconnect the high voltage wires from the spark plugs.



AutoDoc recommends:

Disconnect the wire from the battery negative terminal.

2.2



AutoDoc recommends:

Note the correct procedure for connecting high-voltage wires to spark plugs.

3.1



Remove the spark plugs with a spark plug wrench and place them on a work surface in the order of installing in the engine.

3.2



4



Apply a thin layer of special grease on the thread surface of new spark plugs.

5.1



Screw new spark plugs and tighten them.

5.2




i AutoDoc recommends:

Be careful when working with a spark plug wrench. Its skewing can cause damage to the threaded connection.

Don't tighten the plugs with excessive force. Exceeding tightening torque can damage the thread connection.

6

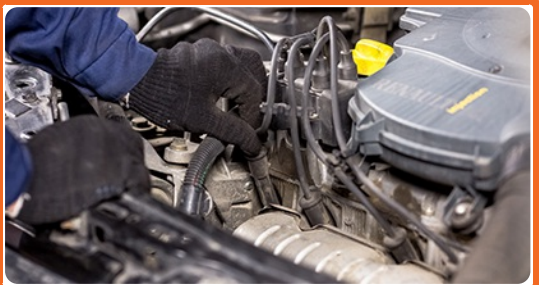

Connect the high voltage wires to the spark plugs.



AutoDoc recommends:

Follow the correct procedure when connecting high-voltage wires to spark plugs.

7



Close the hood

We hope that this information
have been useful for you!



[Video tutorials](#)

Watch our detailed video guides about your RENAULT CLIO II repair on our youtube channel. Watch video guides.



[AutoDoc online](#)

Highest quality spark plugs for your car RENAULT CLIO II are available on AutoDoc. Go to the website.

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE


QUALITY AUTO PARTS



RENAULT



SPARK PLUGS

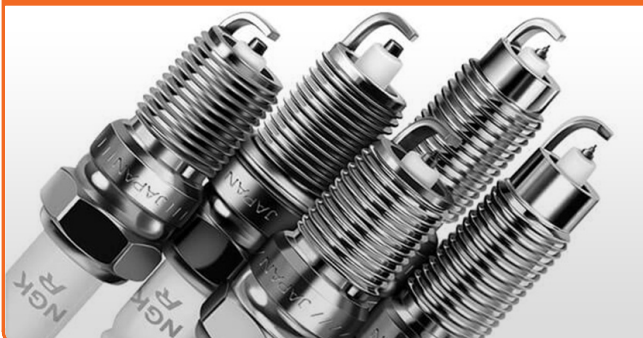

RENAULT CLIO II



SPARK PLUGS FOR RENAULT



SPARK PLUGS FOR RENAULT CLIO II



ⓘ Disclaimer:

The document contains only general recommendations that may be useful for you when you perform repair or replacement works. AutoDoc shall not be liable for any loss, injury, damage of property, acquired in the repair or replacement process due to incorrect usage or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for informative purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

AUTODOC IN SOCIAL MEDIA:

