AUTODOC
Expert in auto parts!

How to replace the tie rod end on Volkswagen Golf III

Carry out replacement in the following order:

1

Tighten the parking brake lever.

2

Place wedge blocks under rear wheels.

3

Loosen the wheel mounting bolts.

4

Raise the front of the car and secure on supports.

5

Remove the front wheels.

AutoDoc recommends:

If the part connection spots on Volkswagen Golf III are extremely dirty, clean them with a metal brush and a penetrating compound.

6

Loosen the lock nut securing the tie rod end to the tie rod.

7

Loosen the clamp nut on the tie rod end.

8

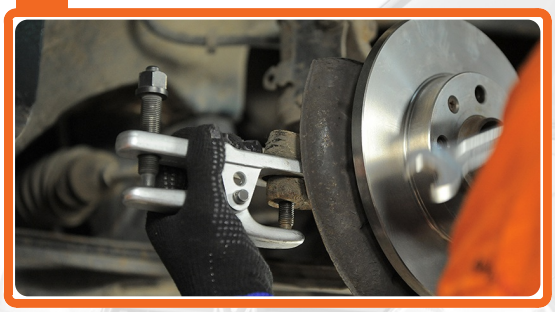

Using a special tool push the steering rod end out of the steering knuckle.

9

Screw the end out of the tie rod.

10

Screw on a new tie rod end

11

Connect the tie rod end to the steering knuckle and tighten it.

12

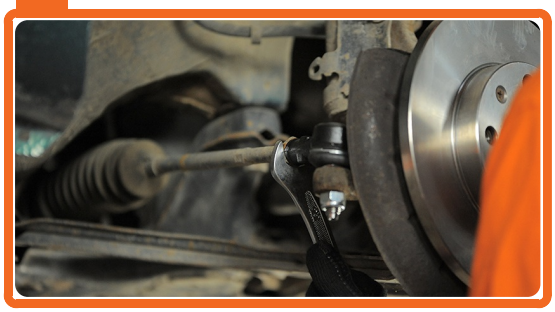

Tighten the tie rod end locknut.

13

Install the wheel.

14

Lower the car and working in a cross order, tighten the wheel bolts.

AutoDoc recommends:

Check and if necessary adjust the wheel alignment on Volkswagen Golf III.

Video tutorials

Watch our detailed video guides about your Volkswagen Golf III repair on our youtube channel. Watch video guides.

AutoDoc online

Highest quality steering knuckle tie rod ends for your car Volkswagen Golf III are available on AutoDoc. Go to the website.

We hope that this information have been useful for you!

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

QUALITY AUTO PARTS

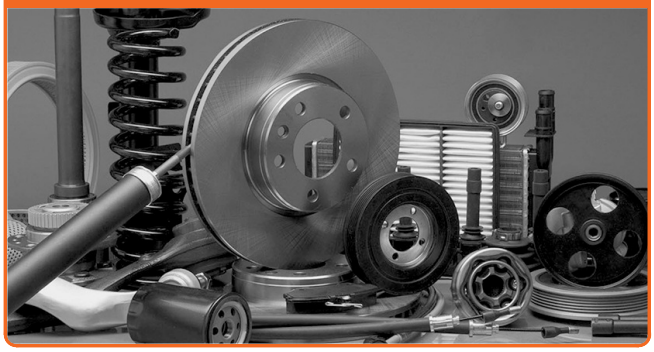

VOLKSWAGEN

STEERING KNUCKLE TIE ROD ENDS

VOLKSWAGEN GOLF III

STEERING KNUCKLE TIE ROD ENDS FOR VOLKSWAGEN

STEERING KNUCKLE TIE ROD ENDS FOR VOLKSWAGEN GOLF III

Disclaimer:

The document contains only general recommendations that may be useful for you when you perform repair or replacement works. AutoDoc shall not be liable for any loss, injury, damage of property, acquired in the repair or replacement process due to incorrect usage or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for informative purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

AUTODOC IN SOCIAL MEDIA