



How to change pollen
filter on **Citroen C3 1** –
replacement guide

VIDEO TUTORIAL



i Important!

This replacement procedure can be used for:

CITROËN C4 II (B7) 1.6 VTi 120, CITROËN C4 II (B7) 1.4 VTi 95, CITROËN C4 II (B7) 1.6 THP 155, CITROËN C4 II (B7) 1.6 HDi 90, CITROËN C4 II (B7) 1.6 HDi 110, CITROËN C4 II (B7) 2.0 HDi / BlueHDi 150, CITROËN C3 I Hatchback (FC_, FN_) 1.6 16V, CITROËN DS4 1.6 VTi 120, CITROËN DS4 1.6 THP 155, CITROËN DS4 1.6 THP 200, CITROËN DS4 1.6 HDi 110, CITROËN DS4 2.0 HDi 165, CITROËN C3 Picasso 1.6 HDi 110, CITROËN C3 I Hatchback (FC_, FN_) 1.6 Bioflex, CITROËN C4 II (B7) 1.6 VTi 120 LPG, (+ 88)

The steps may slightly vary depending on the car design.

REPLACEMENT: POLLEN FILTER – CITROEN C3 1.
TOOLS YOU NEED:



• Phillips screwdriver

• Fender cover

BUY TOOLS

Replacement: pollen filter – Citroen C3 1. AUTODOC experts recommend:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Warning! Shut down the engine before starting any work – Citroen C3 1.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:


1

Open the bonnet.



2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

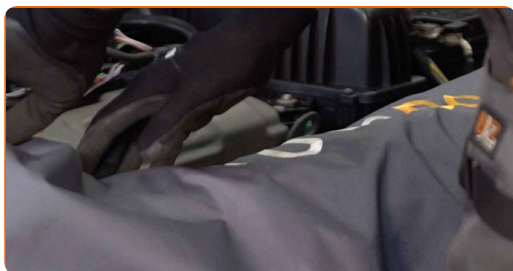


3

Unscrew the fasteners of the cabin filter housing cover. Use a Phillips screwdriver.



4

Remove the cabin filter housing cover.

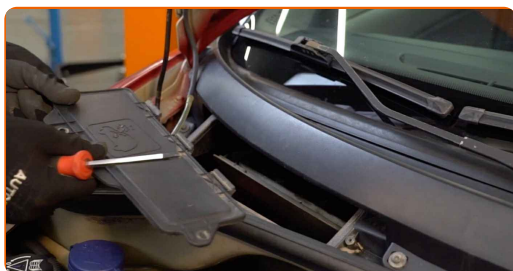

Replacement: pollen filter – Citroen C3 1. Professionals recommend:

- Do not apply excessive force when removing the part. Otherwise you may damage it.

5


Remove the cabin filter.



Replacement: pollen filter – Citroen C3 1. Tip:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.


6 Install the cabin filter to its mounting seat.

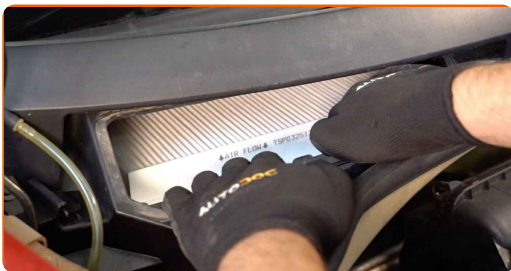

Replacement: pollen filter – Citroen C3 1. Tip from AUTODOC experts:

- Check out the correct location of the filter element. Do not skew.
- Follow the air flow direction arrow on the filter.
- Attention! Use quality filters – Citroen C3 1.

7 Reinstall the cabin filter housing cover.

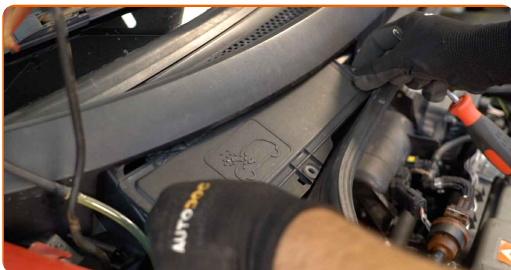

8 Screw in the fasteners of the cabin filter housing cover. Use a Phillips screwdriver.




9 Switch on the ignition.


10 Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.

11 Switch off the ignition.

12 Remove the fender protection cover.

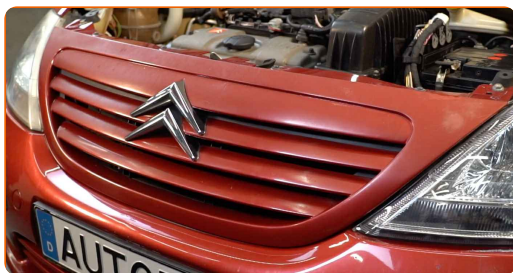

13 Close the hood.

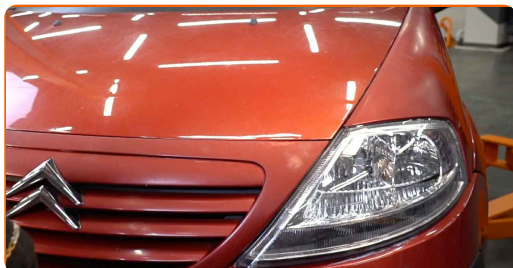

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR CITROEN

POLLEN FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR CITROEN C3 1

POLLEN FILTER FOR CITROEN: BUY NOW

POLLEN FILTER FOR CITROEN C3 1: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.