



How to change engine oil
and filter on **Ford Focus**
MK2 petrol –
replacement guide

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:

FORD C-Max II (DXA/CB7, DXA/CEU) 1.6 Ti, FORD C-Max II (DXA/CB7, DXA/CEU) 1.6 EcoBoost, FORD Grand C-Max (DXA/CB7, DXA/CEU) 1.6 Ti, FORD Grand C-Max (DXA/CB7, DXA/CEU) 1.6 EcoBoost, FORD Fiesta Mk1 Hatchback (GFBT) 0.9, FORD Fiesta Mk2 Hatchback (FBD) 1.1, FORD Fiesta Mk1 Hatchback (GFBT) 1.1, FORD Fiesta Mk1 Hatchback (GFBT) 1.3, FORD Fiesta Mk1 Hatchback (GFBT) 1.6 XR2, FORD Escort Mk3 Hatchback (GAA) 1.1, FORD Escort Mk4 Hatchback (GAF, AWF, ABFT) 1.1, FORD Escort Mk4 Hatchback (GAF, AWF, ABFT) 1.3, FORD Escort Mk4 Hatchback (GAF, AWF, ABFT) 1.4, FORD Escort Mk4 Hatchback (GAF, AWF, ABFT) 1.6 i, FORD Escort Mk4 Hatchback (GAF, AWF, ABFT) 1.6 XR3i, (+ 156)

The steps may slightly vary depending on the car design.

REPLACEMENT: ENGINE OIL AND FILTER – FORD
FOCUS MK2. TOOLS YOU MIGHT NEED:



- All-purpose cleaning spray
- Oil filter cup socket 76-30F
- Impact socket №10
- Impact socket №13
- Ratchet wrench
- Torque wrench
- Flat screwdriver
- Oil drain pan
- Funnel
- Fender cover

BUY TOOLS


Replacement: engine oil and filter – Ford Focus MK2. Tip from AUTODOC:

- Replace the oil filter every time when changing motor oil.
- All work should be done with the engine stopped.
- Wear gloves to prevent contact with hot liquid.

REPLACEMENT: ENGINE OIL AND FILTER – FORD FOCUS MK2. USE THE FOLLOWING PROCEDURE:

1

Open the hood.

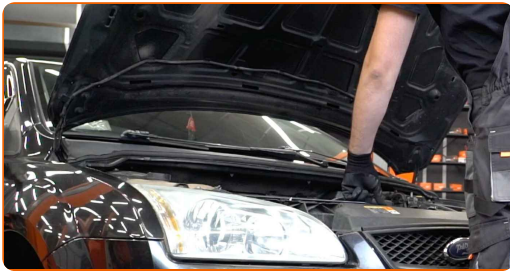

2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.




3

Unscrew the oil filler plug.



4

Lift the car using a jack or place it over an inspection pit.

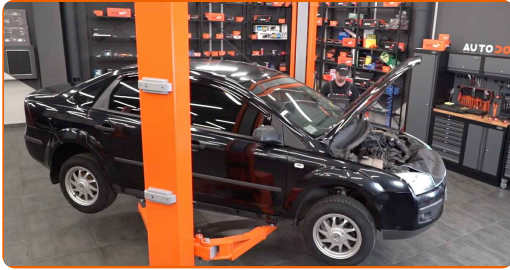


AUTODOC recommends:

- The vehicle must be on even keel, and if it is at an angle, the drain plug must be at the lowest point.
- All work should be done with the engine stopped.

5

Undo the fasteners of the oil pan lower cover.

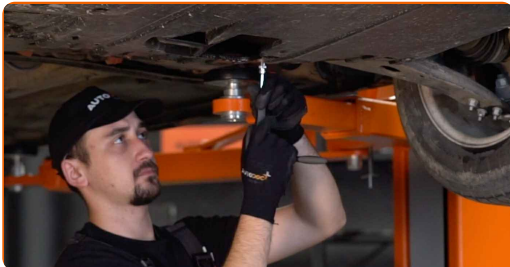


6

Remove the oil pan cover. Use a drive socket #10. Use a flat screwdriver. Use a ratchet wrench.




7

Put a waste oil container with at least 4 l capacity under the drainage hole.

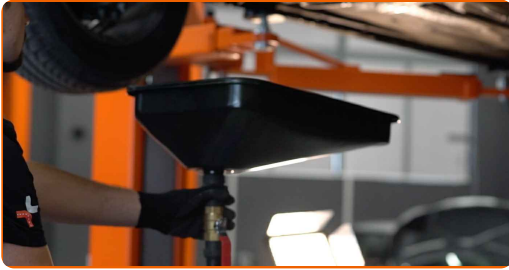


8.1

Unscrew the drain plug. Use a drive socket #13. Use a ratchet wrench.

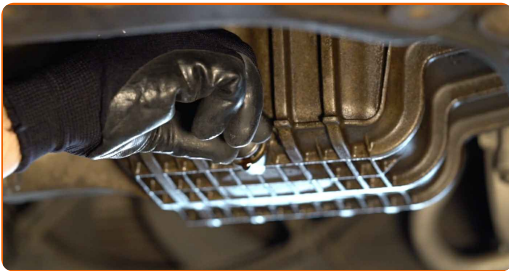

8.2

Drain the used oil.

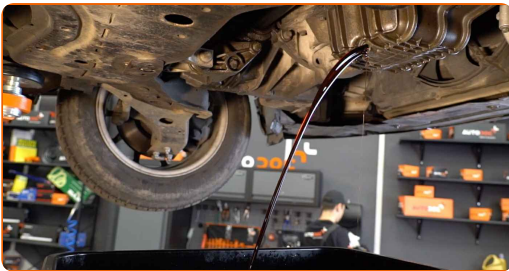


Replacement: engine oil and filter – Ford Focus MK2. Tip:

- Caution! The oil may be hot.
- Wait until the oil has completely drained from the drainage hole.


9

Move the container under the oil filter.

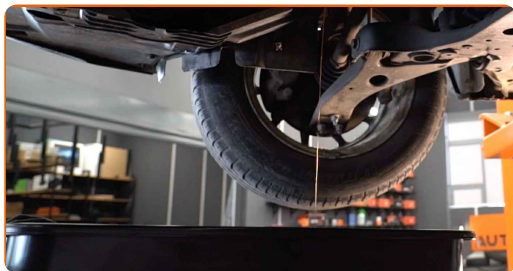


10

Unscrew the oil filter.

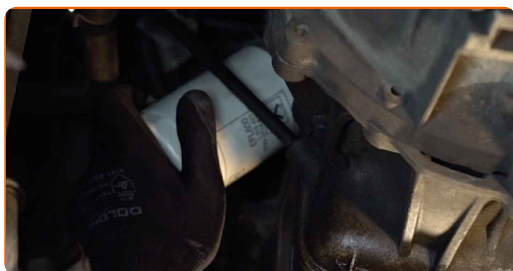

11


Prepare a container for the old oil filter. Put the old oil filter in the container.

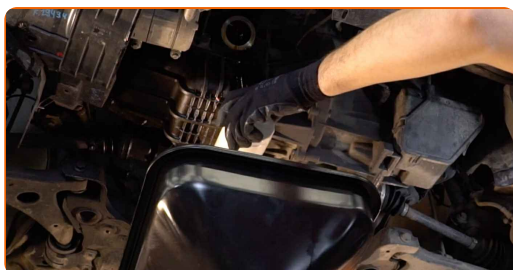

Replacement: engine oil and filter – Ford Focus MK2. Tip from AUTODOC experts:

- Move up the container. The oil starts to drain out of the drainage hole immediately after you have removed the oil filter.

12 Clean the oil filter seat. Use all-purpose cleaning spray.

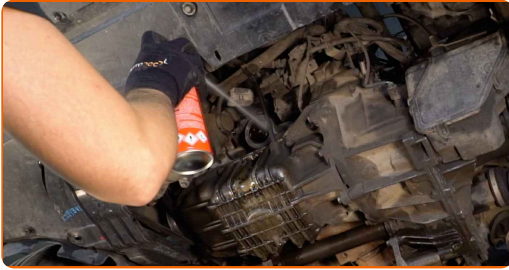


13 Lubricate the rubber seal of the new filter with a little amount of fresh oil.



14 Screw the new filter into its place. Use the 76-30F socket. Use a torque wrench. Tighten it to 18 nm torque.




15 Clean the area of the oil pan drainage hole.

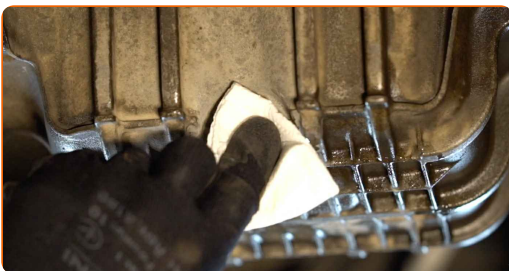

- 16** Screw in the new drainage plug and tighten it. Use a drive socket #13. Use a torque wrench. Tighten it to 27 nm torque.




- 17** Reinstall the oil pan lower cover. Tighten the fasteners of the oil pan lower cover. Use a drive socket #10. Use a ratchet wrench.

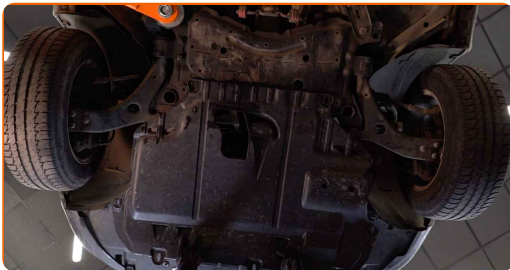

- 18** Lower the car.

- 19** Unscrew the oil filler plug. Insert the funnel.

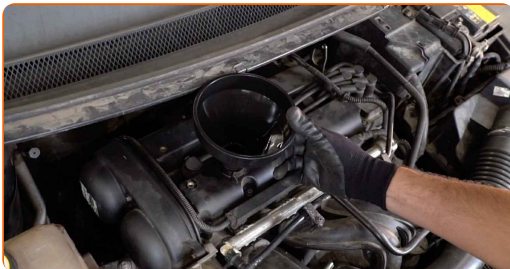

- 20** Pour oil into the engine through the filler. Required amount of oil: 3.7 L.




Replacement: engine oil and filter – Ford Focus MK2. Professionals recommend:

- Use the oil recommended by the manufacturer.

21

Check the oil level using the dipstick. Top up oil if necessary.

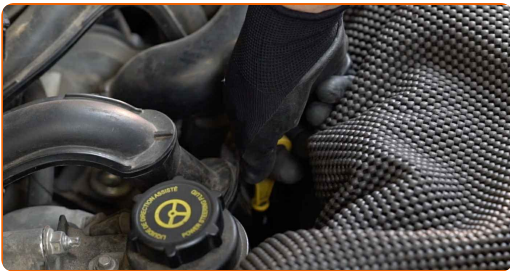


Please note!

- The oil level should be between the Min and Max marks.


22

Tighten the oil filler cap.

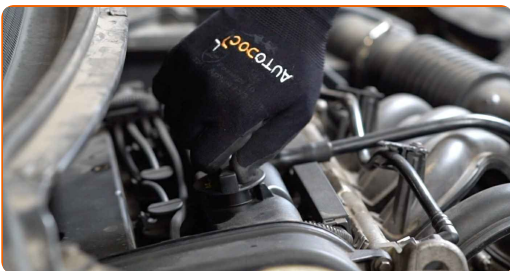


23

Run the engine for a few minutes. After the oil pressure warning light goes out, stop the engine.

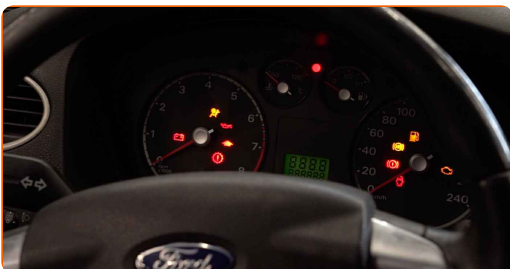

24 Check the oil level 5 minutes after the stop of the engine operation using a dipstick and add oil if necessary.

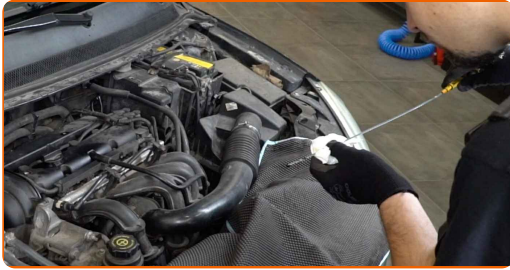

Replacement: engine oil and filter – Ford Focus MK2. Tip from AUTODOC:

- The oil level should be between the Min and Max marks.
- Make sure that the oil filler cap is properly tightened.
- Check the threaded plug of the drainage hole and the oil filter seal for tightness. If necessary, carefully tighten them up.

25 Remove the fender protection cover.



26 Close the hood.



Replacement: engine oil and filter – Ford Focus MK2. AUTODOC experts recommend:

- Note that oil pressure warning light, which indicates insufficient pressure in the lubrication system, may be on for a longer time than usual. After a few seconds, the oil will fill all the channels, and the light will go out.
- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

AUTODOC⁺

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR FORD

OIL FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR FORD FOCUS MK2

OIL FILTER FOR FORD: BUY NOW

**OIL FILTER FOR FORD FOCUS MK2: THE BEST DEALS &
OFFERS**

ⓘ DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.