



How to change pollen
filter on **Honda Accord**
VIII CU – replacement
guide

VIDEO TUTORIAL



i Important!

This replacement procedure can be used for:

HONDA CR-V III (RE) 2.4 i-VTEC 4WD (RE7), HONDA CR-V IV (RM_) 2.0, HONDA CR-V IV (RM_) 2.4, HONDA CR-V IV (RM_) 2.4 AWD, HONDA LEGEND IV (KB_) 3.7 VTEC V6 4WD, HONDA CR-V III (RE) 2.4 4WD (RE4), HONDA CIVIC VIII Saloon (FD, FA) 1.8 EXS Flex, HONDA CIVIC IX (FK) 1.4 i-VTEC (FK1), HONDA CIVIC IX (FK) 1.8 i-VTEC (FK2), HONDA CIVIC IX (FK) 2.2 i-DTEC (FK3), HONDA PILOT 3.5 4WD, HONDA Accord VII Saloon (CL, CN) 2.0, HONDA Accord VII Saloon (CL, CN) 2.4, HONDA Accord VII Tourer (CM, CN) 2.0, HONDA Accord VII Tourer (CM, CN) 2.4, (+ 55)

The steps may slightly vary depending on the car design.

Replacement: pollen filter – Honda Accord VIII CU. Tip:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Warning! Shut down the engine before starting any work – Honda Accord VIII CU.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1

Open the glove box.



2

Take the plastic shelf out of the glove box.




3

Release the cabin filter cover clips. Remove the cabin filter housing cover.



4

Remove the cabin air filter housing.

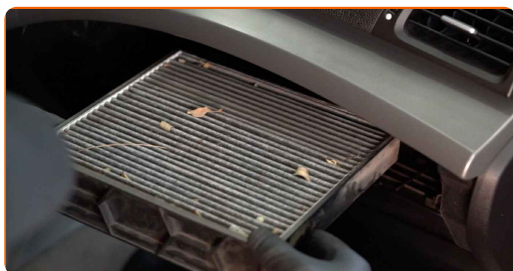

5

Remove the cabin filter.




Replacement: pollen filter – Honda Accord VIII CU. AUTODOC experts recommend:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

6

Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.

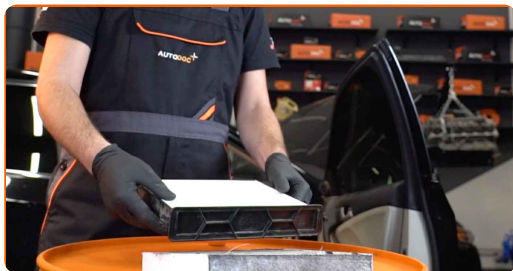

AUTODOC recommends:

- Check out the correct location of the filter element. Do not skew.

7

Install the cabin air filter housing.



Replacement: pollen filter – Honda Accord VIII CU. AUTODOC recommends:

- Follow the air flow direction arrow on the filter.

8

Reinstall the cabin filter housing cover. Make sure you hear a click indicating that it is locked in place.




9

Install the plastic shelf inside the glove box. Close the glove box.



10

Switch on the ignition.

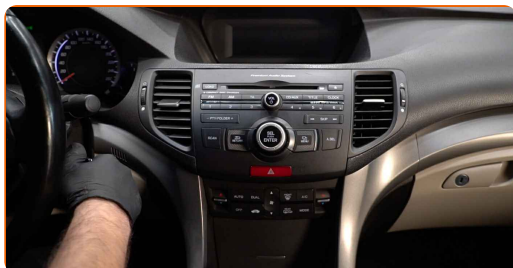

11

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.



12

Switch off the ignition.



WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR HONDA

POLLEN FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR HONDA ACCORD VIII CU

POLLEN FILTER FOR HONDA: BUY NOW

**POLLEN FILTER FOR HONDA ACCORD VIII CU: THE BEST
DEALS & OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.