



How to change air filter  
on **ALFA ROMEO Brera**  
**(939\_)** – replacement  
guide

## SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

### Important!


This replacement procedure can be used for:

ALFA ROMEO Brera (939\_) 2.0 JTDM, ALFA ROMEO Brera (939\_) 2.2 JTS (939.DXB11), ALFA ROMEO Brera (939\_) 3.2 JTS Q4 (939.DXG22), ALFA ROMEO Brera (939\_) 2.4 JTDM 20V, ALFA ROMEO Brera (939\_) 3.2 JTS, ALFA ROMEO Brera (939\_) 1.8 TBi

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: ALFA ROMEO 159 Sportwagon (939) 2.2 JTS

REPLACEMENT: AIR FILTER – ALFA ROMEO BRERA (939\_). TOOLS YOU MIGHT NEED:

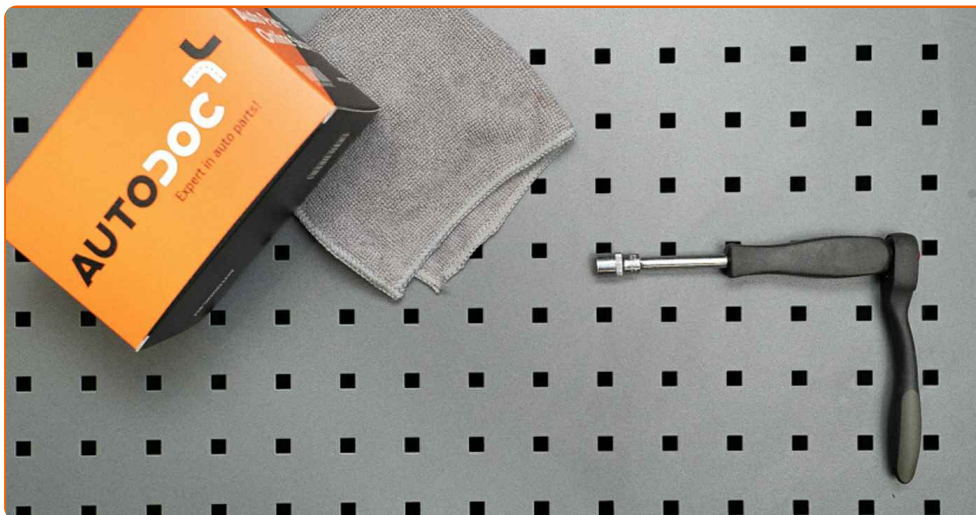

- Drive socket # 7
- Ratchet wrench
- Microfibre towel

**Buy tools**

**AUTODOC recommends:**


- Replacement: air filter – ALFA ROMEO Brera (939\_). Follow the maintenance schedule, recommendations, and requirements specified by the manufacturer.
- All work should be done with the engine stopped.

**REPLACEMENT: AIR FILTER – ALFA ROMEO BRERA (939\_). TAKE THE FOLLOWING STEPS:**


**1** Lift the car using a jack or place it over an inspection pit.




**2** Undo the fastening screws of the air filter cover. Use a drive socket #7. Use a ratchet wrench.

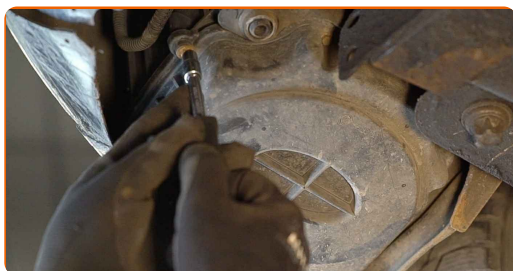

**3** Take off the filter lid.

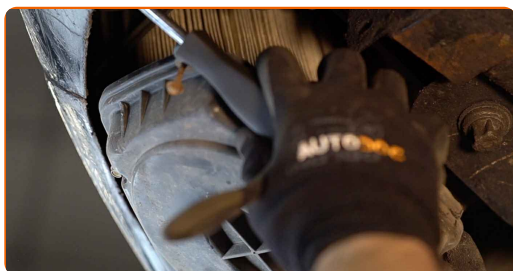

**4** Remove the filter element from the filter housing.

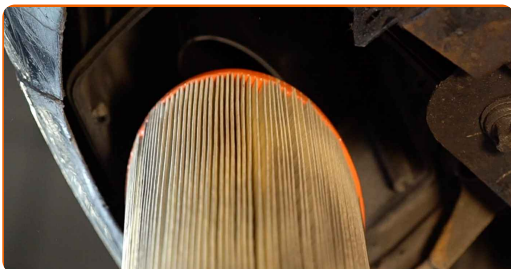


**5** Clean the air filter cover and housing.



Replacement: air filter – ALFA ROMEO Brera (939\_). AUTODOC experts recommend:

- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.

**6** Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.

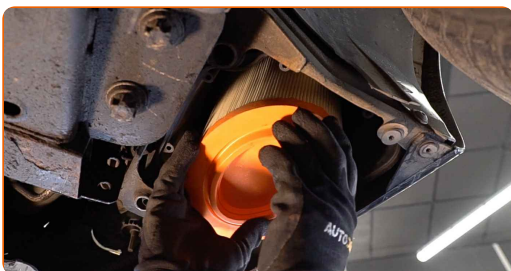


Replacement: air filter – ALFA ROMEO Brera (939\_). Tip from AUTODOC experts:

- Check out the correct location of the filter element. Do not skew.
- ALFA ROMEO Brera (939\_) – It's important to only use high-quality filters.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.


7

Reinstall the air filter cover. Fasten it.

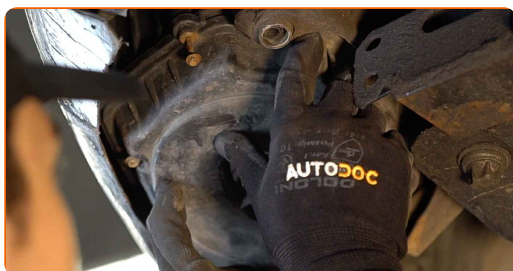

8

Screw in the fastening screws of the air filter cover. Use a drive socket #7. Use a ratchet wrench.

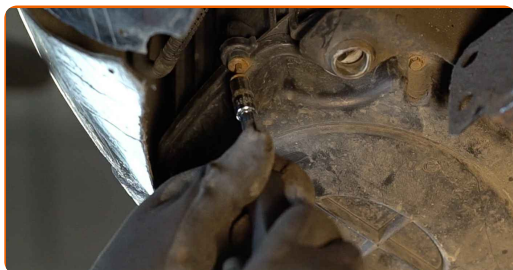

9

Lower the car.

**WELL DONE!** 

**VIEW MORE TUTORIALS**

# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**AIR FILTER: A WIDE SELECTION**

## **(i) DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.