



How to change rear strut  
mount on **Audi A4 B6** –  
replacement guide

## VIDEO TUTORIAL



### **Important!**

This replacement procedure can be used for:

AUDI A6 Saloon (4F2, C6) 3.0 TFSI quattro, AUDI A6 Avant (4F5, C6) 3.0 TFSI quattro, AUDI A6 Saloon (4F2, C6) 3.2 FSI, AUDI A4 Saloon (8E2, B6) 1.8 T, AUDI A4 Saloon (8E2, B6) 2.0, AUDI A4 Saloon (8E2, B6) 1.8 T quattro, AUDI A4 Saloon (8E2, B6) 3.0, AUDI A4 Saloon (8E2, B6) 3.0 quattro, AUDI A4 Saloon (8E2, B6) 1.9 TDI, AUDI A4 Saloon (8E2, B6) 2.5 TDI quattro, AUDI A4 Saloon (8E2, B6) 1.6, AUDI A4 Saloon (8E2, B6) 2.5 TDI, AUDI A4 Avant (8E5, B6) 1.6, AUDI A4 Avant (8E5, B6) 2.0, AUDI A4 Avant (8E5, B6) 1.8 T, (+ 84)

The steps may slightly vary depending on the car design.

REPLACEMENT: STRUT MOUNT – AUDI A4 B6. TOOLS YOU MIGHT NEED:



- Wire brush
- WD-40 spray
- Brake cleaner
- Copper grease
- Combination spanner #17
- Combination spanner #21
- Drive socket # 21
- Torx bit T25
- HEX bit No.H6.
- Wheel impact socket #17
- Ratchet wrench
- Torque wrench
- Adjustable wrench
- Hydraulic transmission jack
- Wheel chock

**BUY TOOLS**


Replacement: strut mount – Audi A4 B6. AUTODOC experts recommend:

- The replacement procedure is identical for the mounts of the right and left shock absorbers of the rear suspension.
- Both mounts of the rear shock struts should be replaced simultaneously.
- Be sure to replace all self-locking nuts and bolts during installation.
- All work should be done with the engine stopped.

**REPLACEMENT: STRUT MOUNT – AUDI A4 B6. TAKE THE FOLLOWING STEPS:**

1

Secure the wheels with chocks.

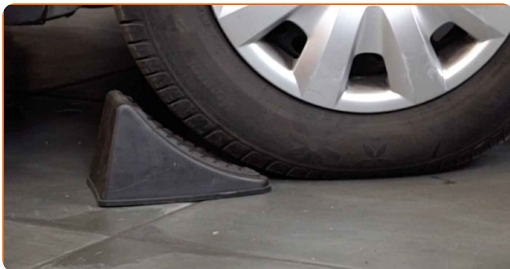

2

Loosen the wheel mounting bolts. Use wheel impact socket #17.



3

Raise the rear of the car and secure on supports.

**4** Unscrew the wheel bolts.



**AUTODOC recommends:**


- Warning! To avoid injury, hold the wheel while unscrewing the fastening bolts.  
Audi A4 B6

**5** Remove the wheel.




**6** Clean the shock absorber fasteners. Use a wire brush. Use WD-40 spray.

**7** Unscrew the lower fastener of the shock absorber. Use a combination spanner #21. Use a drive socket #21. Use a ratchet wrench.

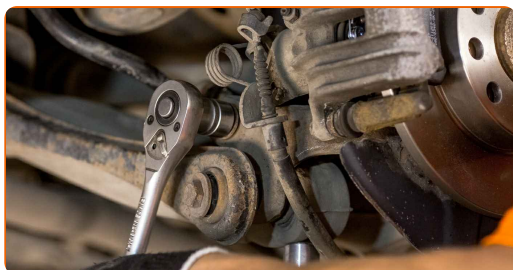


**8** Support the arm. Use a hydraulic transmission jack.

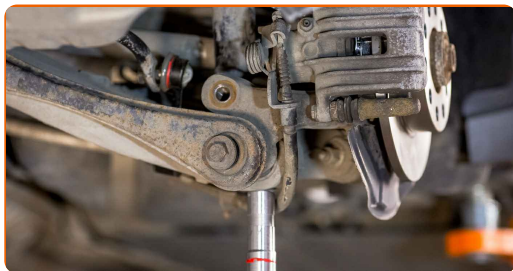

**9** Remove the fastening bolt.


**10** Unscrew and remove the wheel arch cover fasteners. Use Torx T25. Use a ratchet wrench.

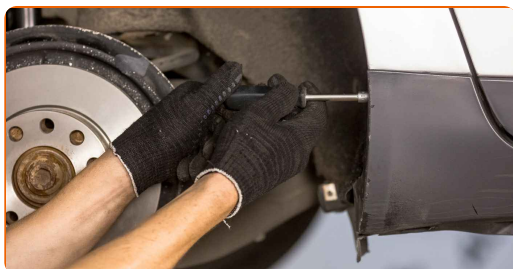

**11** Remove the wheel arch cover.



**12** Unscrew the upper fastener of the shock absorber. Use HEX No.H6. Use a ratchet wrench.

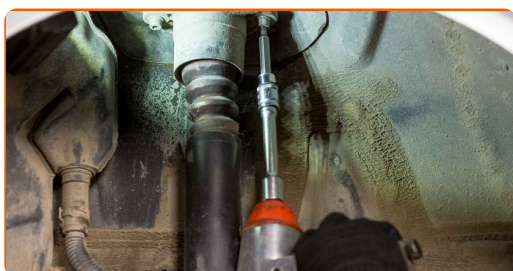


**AUTODOC recommends:**

- Important! Hold the shock absorber while unscrewing the fastening bolts. Audi A4 B6

**13**

Remove the shock absorber.

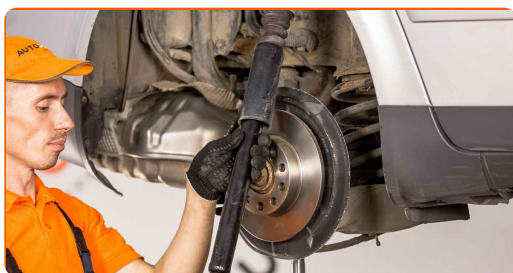


**14**

Clean the shock absorber rod fastener. Use a wire brush. Use WD-40 spray.


**15**

Remove the shock absorber piston rod fastening. Use a combination spanner #17. Use an adjustable wrench.

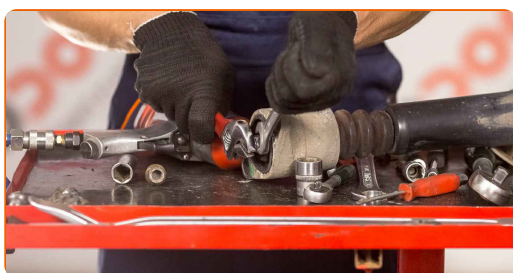

**16**

Remove the top mount.

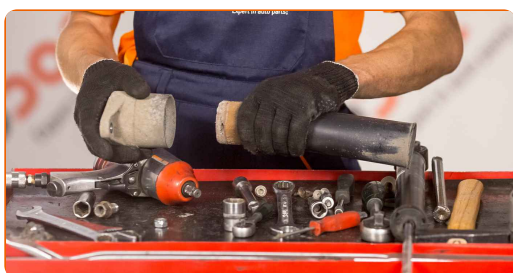

**17**


Remove the shock absorber dust cap and the bump stop.




**18** Install the new mount, boot, and bump stop on the shock absorber.




**19** Screw the shock strut piston rod upper fastening. Use a combination spanner #17. Use an adjustable wrench. Use a torque wrench. Tighten it to 25 Nm torque.

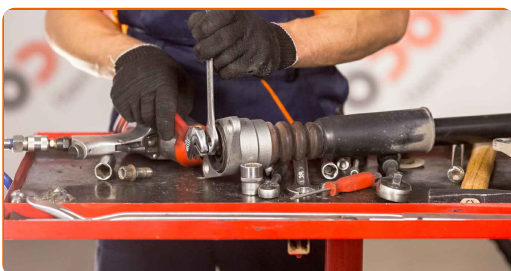

**20** Clean the shock absorber mounting seats. Use a wire brush. Use WD-40 spray.

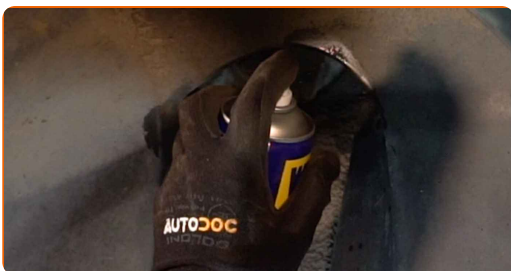

**21** Place the shock absorber in the wheel arch and secure it.

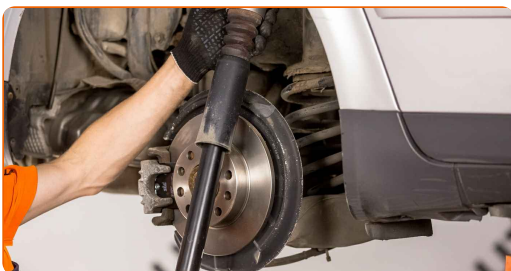





**AUTODOC recommends:**

- Audi A4 B6 – To avoid injury, hold the shock absorber while screwing in the fastening bolts.

**22** Tighten the top shock absorber fastening. Use HEX No.H6. Use a torque wrench. Tighten it to 36 Nm torque.

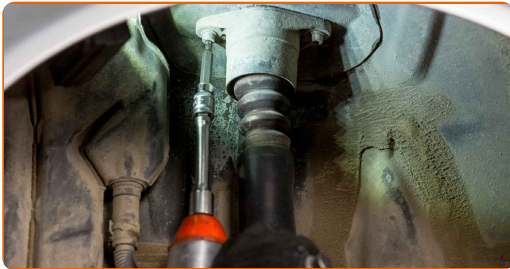

**23** Install the fastening bolt.

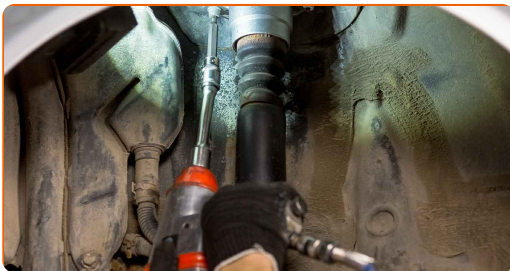

**24** Screw in the lower fastener of the shock absorber. Use a combination spanner #21. Use a drive socket #21. Use a ratchet wrench.




**25** Tighten the lower fastener of the shock absorber. Use a drive socket #21. Use a torque wrench. Tighten it to 150 Nm torque.+90°

**AUTODOC recommends:**

- Important! Be sure to use new fasteners.

**26**

Remove the support from under the arm.

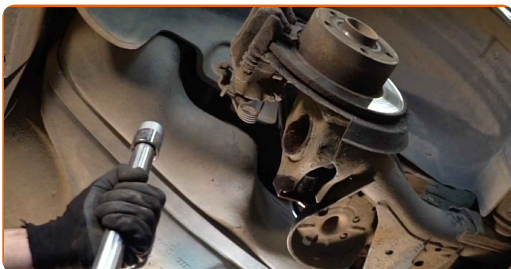


**AUTODOC recommends:**

- Replacement: strut mount – Audi A4 B6. Lower the transmission jack smoothly, without jerks, to avoid damaging components and mechanisms.


**27**

Install the wheel arch cover to its mounting seat.

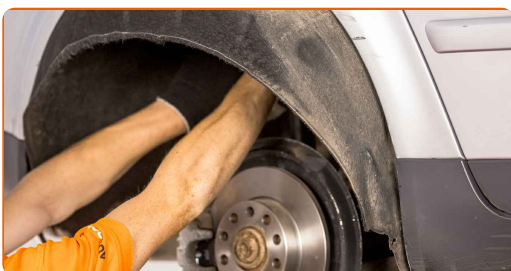


**28**

Install and tighten the wheel arch cover fasteners. Use Torx T25. Use a ratchet wrench.

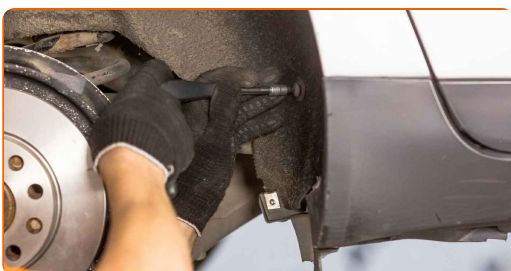

29

Treat the surface where the brake disc contacts the wheel rim. Use copper grease.

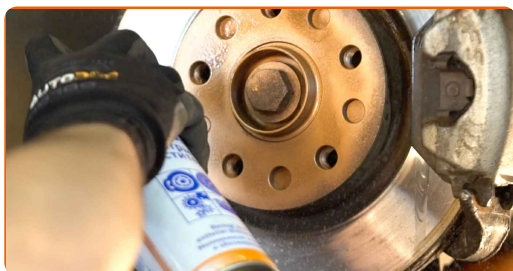

30

Clean the brake disk surface. Use a brake cleaner.



**AUTODOC recommends:**

- Replacement: strut mount – Audi A4 B6. After applying the spray, wait a few minutes.

31

Install the wheel.



**AUTODOC recommends:**

- Warning! To avoid injury, hold the wheel while screwing in the fastening bolts on the car. Audi A4 B6

32

Screw in the wheel bolts. Use wheel impact socket #17.



33

Lower the car and working in a cross order, tighten the wheel bolts. Use wheel impact socket #17. Use a torque wrench. Tighten it to 120 nm torque.



34

Remove the jacks and chocks.

**WELL DONE!** 

**VIEW MORE TUTORIALS**

# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**+ AUTODOC**

GET IT ON  
**Google Play**

Download on the  
**App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR AUDI**

**STRUT MOUNT: A WIDE SELECTION**

**CHOOSE CAR PARTS FOR AUDI A4 B6**

**STRUT MOUNT FOR AUDI: BUY NOW**

**STRUT MOUNT FOR AUDI A4 B6: THE BEST DEALS &  
OFFERS**

### **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.