



How to change pollen
filter on **CITROËN C3 II**
(SC_) – replacement
guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!

This replacement procedure can be used for:

CITROËN C3 II (SC_) 1.1 BiFuel, CITROËN C3 II (SC_) 1.1, CITROËN C3 II (SC_) 1.4, CITROËN C3 II (SC_) 1.4 VTi 95, CITROËN C3 II (SC_) 1.6 VTi 120, CITROËN C3 II (SC_) 1.6 HDi, CITROËN C3 II (SC_) 1.6 HDi 110, CITROËN C3 II (SC_) 1.6 HDi 90, CITROËN C3 II (SC_) 1.4 HDi 70, CITROËN C3 II (SC_) 1.4 LPG, CITROËN C3 II (SC_) 1.0 VTi 68, CITROËN C3 II (SC_) 1.2 VTi 82, CITROËN C3 II (SC_) 1.6 HDi 115, CITROËN C3 II (SC_) 1.2 THP 110, CITROËN C3 II (SC_) 1.6 BlueHDi 100, (+ 3)

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: PEUGEOT 207 Hatchback 1.6 16V VTi

REPLACEMENT: POLLEN FILTER – CITROËN C3 II (SC_).
TOOLS YOU MIGHT NEED:



- Fender cover


[Buy tools](#)

Replacement: pollen filter – CITROËN C3 II (SC_). Tip from AUTODOC experts:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Warning! Shut down the engine before starting any work – CITROËN C3 II (SC_).

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

- 1** Open the bonnet.
- 2** Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.
- 3** Remove the cabin filter housing cover.

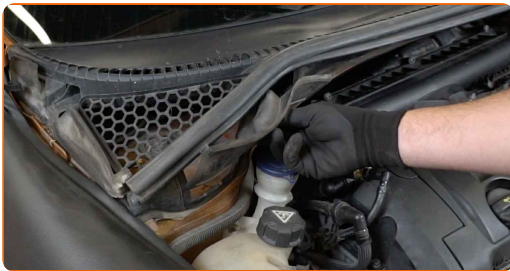

AUTODOC recommends:

- Do not apply excessive force when removing the part. Otherwise you may damage it.

4 Press the pollen filter retaining clips to release them.



5 Take all filter cartridges out.




6 Switch on the ignition.

7 Close the heater flap.



8 Switch off the ignition.

9 Clean the cabin filter housing and cover.

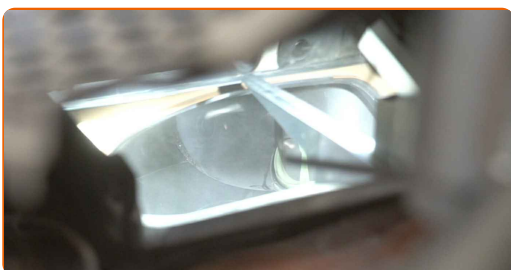

Replacement: pollen filter – CITROËN C3 II (SC_). Tip:

- Remove any debris from the cabin filter housing carefully to prevent contamination of the ventilation duct.

10

Install new filter cartridges.



AUTODOC recommends:

- Follow the air flow direction arrow on the filter.
- Check out the correct location of the filter element. Do not skew.
- CITROËN C3 II (SC_) – It's important to only use high-quality car parts.


11

Lock the pollen filter retaining clips in place.



12

Reinstall the cabin filter housing cover. Make sure you hear a click indicating that it is locked in place.

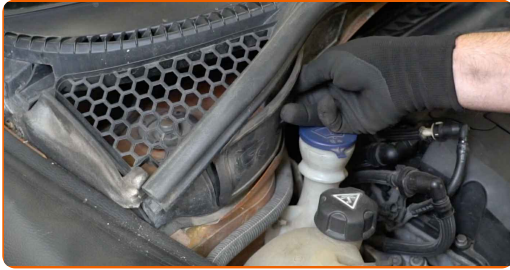

Replacement: pollen filter – CITROËN C3 II (SC_). Professionals recommend:

- When installing, do not use excessive force to avoid damage to the part.

13

Remove the fender protection cover.

14

Close the hood.

15

Switch on the ignition. The heater flap will automatically return to its normal position.

16

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.

17

Switch off the ignition.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
 **Google Play**

 **Download on the App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

POLLEN FILTER: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.