+ AUTODOC CLUB


How to change air filter on **Opel Corsa S93** – replacement guide







VIDEO TUTORIAL

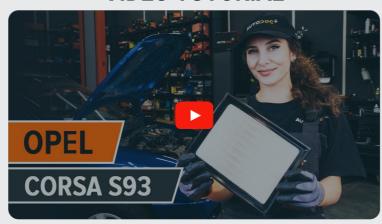

(i) Important!

This replacement procedure can be used for:

OPEL Corsa B Hatchback (S93) 1.2 i (X 12 SZ, C 12 NZ), OPEL Corsa B Hatchback (S93) 1.4 i (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.4 Si (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.6 GSI 16V (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.4 i 16V (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.6 i 16V (F08, F68, M68), OPEL COMBO (71_) 1.2, OPEL COMBO (71_) 1.4, OPEL Tigra Coupe (S93) 1.4 16V (F07), OPEL Tigra Coupe (S93) 1.6 16V (F07), OPEL Corsa A Van (S83) 1.2 (F08, W5L), OPEL Corsa B Hatchback (S93) 1.0 i 12V (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.2 i 16V (F08, F68, M68), OPEL Corsa B Van (S93) 1.4 i (F08, W5L), OPEL Corsa B Hatchback (S93) 1.2 i (12 NZ), (+3)

The steps may slightly vary depending on the car design.

CLUB.AUTODOC.CO.UK 1–9







REPLACEMENT: AIR FILTER – OPEL CORSA S93. LIST OF THE TOOLS YOU'LL NEED:



- Phillips Screwdriver
- Microfibre towel

Fender cover

BUY TOOLS

CLUB.AUTODOC.CO.UK 2-9







Replacement: air filter – Opel Corsa S93. AUTODOC experts recommend:

- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- Please note: all work on the car Opel Corsa S93 should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1 Open the bonnet.



Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.



Loosen the fastening clamp connecting the air duct to the air filter housing. Use a Phillips screwdriver.



CLUB.AUTODOC.CO.UK 3–9







Disconnect the air intake pipe from the air filter housing.



Cover the air intake hose with a microfibre towel to prevent dust and dirt from getting into the system.



6 Release the air filter cover clips.



Take off the filter lid.



AUTODOC recommends:

 Replacement: air filter – Opel Corsa S93. Do not use excessive force when removing the part as this may damage it.

CLUB.AUTODOC.CO.UK 4–9







Remove the filter element from the filter housing.



Clean the air filter cover and housing.

10



Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.



AUTODOC recommends:

- Replacement: air filter Opel Corsa S93. Be sure to position the filtering element correctly. Avoid misalignment.
- Take care to only use quality filters.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.

CLUB.AUTODOC.CO.UK 5–9







11 Reinstall the air filter cover.



AUTODOC recommends:

- Replacement: air filter Opel Corsa S93. Do not use excessive force during installation. This may damage the part.
- Press the air filter cover clips into place.



Remove the microfibre towel from the air intake hose.



Install the air intake hose and secure it.

14



CLUB.AUTODOC.CO.UK 6–9







Screw the fastening clamp connecting the air duct to the air filter housing. Use a Phillips screwdriver.



Remove the fender protection cover.



17 Close the hood.






VIEW MORE TUTORIALS

CLUB.AUTODOC.CO.UK 7–9





AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

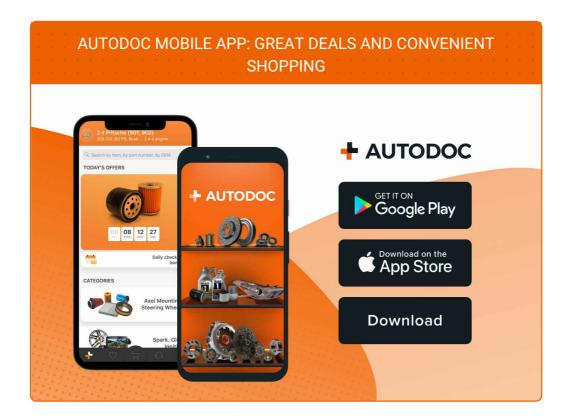

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR OPEL

AIR FILTER: A WIDE SELECTION

CLUB.AUTODOC.CO.UK 8-9





CHOOSE CAR PARTS FOR OPEL CORSA S93

AIR FILTER FOR OPEL: BUY NOW

AIR FILTER FOR OPEL CORSA S93: THE BEST DEALS & OFFERS

① DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.

CLUB.AUTODOC.CO.UK 9-9