



How to change rear strut
mount on **Ford Fiesta V**
JH JD – replacement
guide

VIDEO TUTORIAL



❗ Important!

This replacement procedure can be used for:

FORD Fiesta Mk5 Hatchback (JH1, JD1, JH3, JD3) 1.4 TDCi, FORD Fiesta Mk5 Hatchback (JH1, JD1, JH3, JD3) 1.3, FORD Fiesta Mk5 Hatchback (JH1, JD1, JH3, JD3) 1.6 16V, FORD Fusion Estate (JU2) 1.4, FORD Fusion Estate (JU2) 1.6, FORD Fusion Estate (JU2) 1.4 TDCi, FORD Fiesta Mk5 Hatchback (JH1, JD1, JH3, JD3) 1.25 16V, FORD Fiesta Mk5 Hatchback (JH1, JD1, JH3, JD3) 1.6 TDCi, FORD Fusion Estate (JU2) 1.6 TDCi, FORD Fiesta Mk5 Hatchback (JH1, JD1, JH3, JD3) ST150, FORD Fusion Estate (JU2) 1.25, FORD Fusion Estate (JU2) 1.3, FORD Fusion Estate (JU2) 1.4 LPG

The steps may slightly vary depending on the car design.

REPLACEMENT: STRUT MOUNT – FORD FIESTA V JH JD. LIST OF THE TOOLS YOU'LL NEED:



- Wire brush
- WD-40 spray
- Brake cleaner
- Copper grease
- Drive socket # 10
- Drive socket # 13
- Drive socket # 15
- Wheel impact socket #19
- Ratchet wrench
- Torque wrench
- Hydraulic transmission jack
- Wheel chock

BUY TOOLS


Replacement: strut mount – Ford Fiesta V JH JD. AUTODOC experts recommend:

- The replacement procedure is identical for the mounts of the right and left shock absorbers of the rear suspension.
- Both mounts of the rear shock struts should be replaced simultaneously.
- During the installation process, use only new bolts and nuts.
- All work should be done with the engine stopped.

REPLACEMENT: STRUT MOUNT – FORD FIESTA V JH JD. RECOMMENDED SEQUENCE OF STEPS:

1

Secure the wheels with chocks.

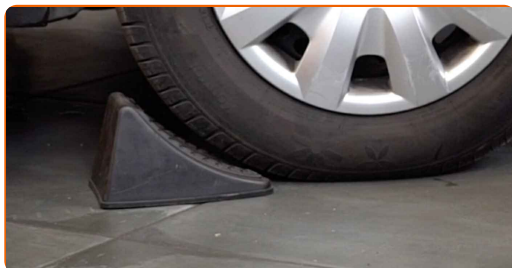

2

Loosen the wheel mounting bolts. Use wheel impact socket #19.



3

Raise the rear of the car and secure on supports.

4

Unscrew the wheel bolts.



AUTODOC recommends:

- Warning! To avoid injury, hold the wheel while unscrewing the fastening bolts.
Ford Fiesta V JH JD

5

Remove the wheel.




6

Support the rear suspension beam. Use a hydraulic transmission jack.




7

Clean the shock absorber fasteners. Use a wire brush. Use WD-40 spray.

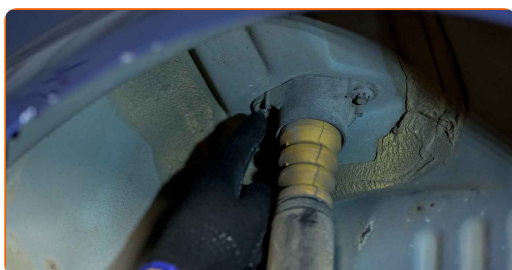

8

Unscrew the lower fastener of the shock absorber. Use a drive socket #15. Use a ratchet wrench.

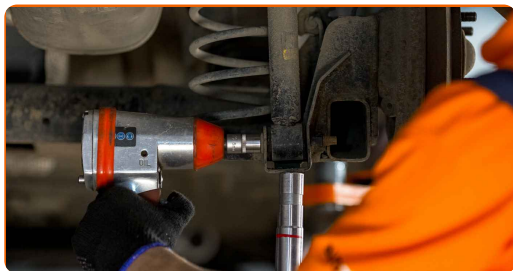

9

Remove the fastening bolt.

Replacement: strut mount – Ford Fiesta V JH JD. AUTODOC recommends:

- To avoid injuries, hold the shock absorber when undoing the fastening bolts.


10

Unscrew the upper fastener of the shock absorber. Use a drive socket #10. Use a ratchet wrench.



11

Remove the shock absorber.

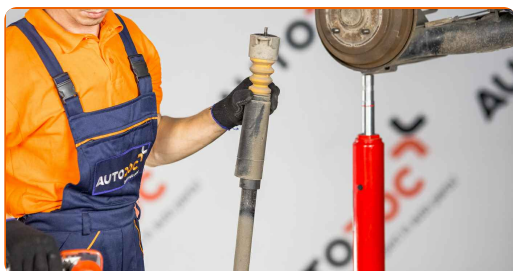

12

Unscrew the shock absorber mount fastening. Use a drive socket #13. Use a ratchet wrench.




13

Remove the shock absorber mount, boot and bump stop.



14

Remove the top strut mount.

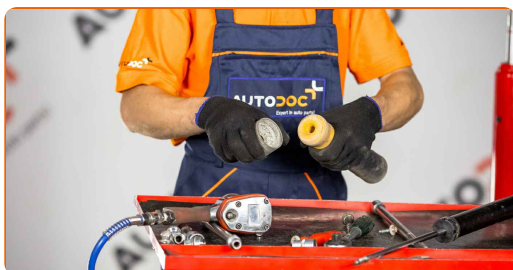


Replacement: strut mount – Ford Fiesta V JH JD. Tip from AUTODOC:


- Examine the shock absorber dust cap and the bump stop. Replace them if necessary.

15


Install the upper strut mount and the strut mount bearing.

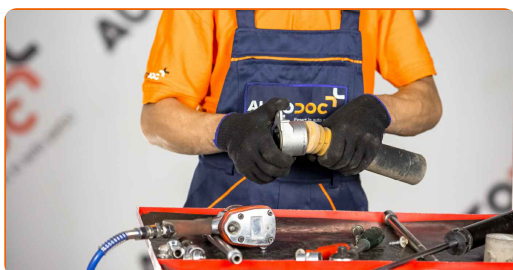

- 16 Install the mount, the boot and the bump stop on the shock absorber.

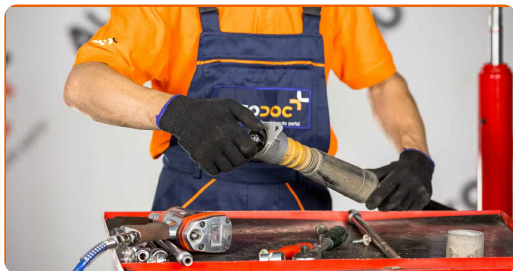


- 17 Tighten the shock absorber mount fasteners. Use a drive socket #13. Use a torque wrench. Tighten it to 25 nm torque.

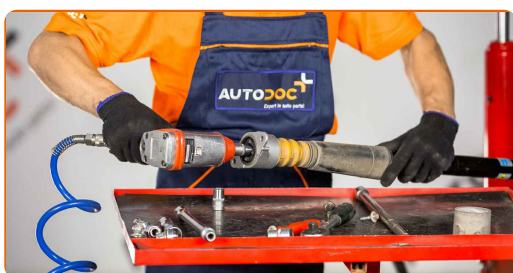

- 18 Treat the shock absorber mounting seats. Use a wire brush. Use WD-40 spray.

- 19 Place the shock absorber in the wheel arch and fasten it.

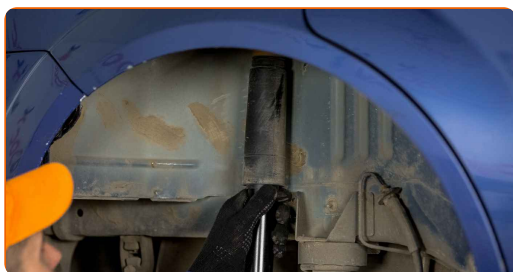


Replacement: strut mount – Ford Fiesta V JH JD. Tip:

- To avoid injury, hold the shock absorber cautiously tight when screwing in the fastening bolts.


20 Screw the upper fastener of the shock absorber.




21 Tighten the top shock absorber fastening. Use a drive socket #10. Use a torque wrench. Tighten it to 25 Nm torque.

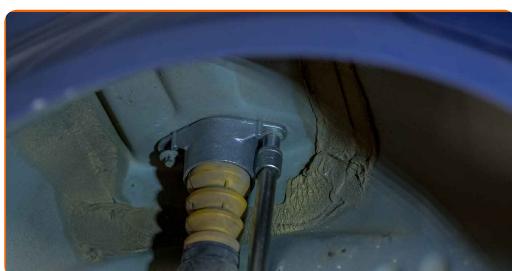


22 Install the fastening bolt.

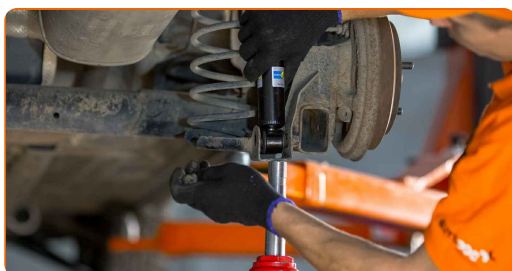

23 Tighten the lower fastener of the shock absorber. Use a drive socket #15. Use a torque wrench. Tighten it to 115 Nm torque.

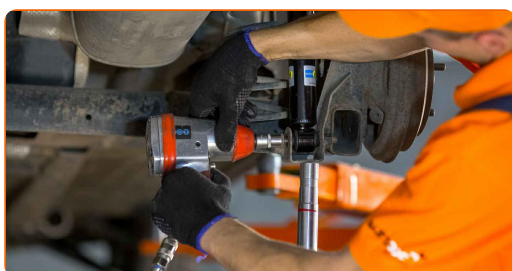

24 Remove the mounting from under the rear axle beam.

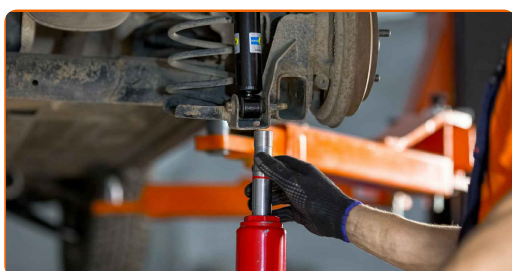

AUTODOC recommends:

- Ford Fiesta V JH JD – Do not lower the transmission jack sharply to avoid damaging components and mechanisms of the car.

25

Treat the shock absorber fasteners. Use copper grease.

26

Treat the surface where the wheel rim contacts the brake drum. Use copper grease.



27

Clean the wheel rim mounting seat. Use a brake cleaner.



Replacement: strut mount – Ford Fiesta V JH JD. Tip from AUTODOC experts:

- After applying the spray, wait a few minutes.

28

Install the wheel.



Replacement: strut mount – Ford Fiesta V JH JD. Tip:

- To avoid injury, hold up the wheel when screwing in the fastening bolts.

29

Screw in the wheel bolts. Use wheel impact socket #19.




30

Lower the car and working in a cross order, tighten the wheel bolts. Use wheel impact socket #19. Use a torque wrench. Tighten it to 95 nm torque.



31

Remove the jacks and chocks.

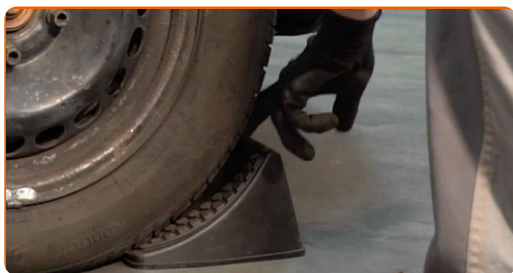**WELL DONE!** 👍[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR FORD

STRUT MOUNT: A WIDE SELECTION

CHOOSE CAR PARTS FOR FORD FIESTA V JH JD

STRUT MOUNT FOR FORD: BUY NOW

**STRUT MOUNT FOR FORD FIESTA V JH JD: THE BEST DEALS
& OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.