



How to change fuel filter
on **FORD Fiesta Mk5 Van**
– replacement guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle


Important!

This replacement procedure can be used for:
FORD Fiesta Mk5 Van 1.3

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: FORD Fiesta Mk5 Hatchback (JH1, JD1, JH3, JD3) 1.4 16V

REPLACEMENT: FUEL FILTER – FORD FIESTA MK5 VAN.
TOOLS YOU'LL NEED:

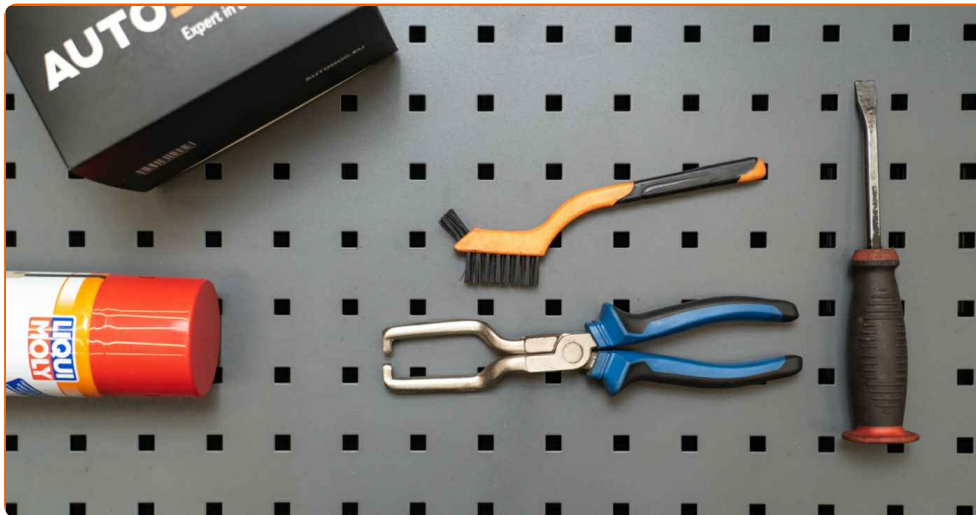

- Nylon cleaning brush
- All-purpose cleaning spray
- Fluid container
- Fuel line pliers
- Crow bar

[Buy tools](#)

Replacement: fuel filter – FORD Fiesta Mk5 Van. AUTODOC recommends:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

REPLACEMENT: FUEL FILTER – FORD FIESTA MK5 VAN. RECOMMENDED SEQUENCE OF STEPS:

1 Open the fuel door.


2 Unscrew the fuel filler cap.

3 Lift the car using a jack or place it over an inspection pit.

4 Prepare a container for fluids.



5 Clean the fasteners of the fuel supply lines. Use a nylon cleaning brush. Use all-purpose cleaning spray.

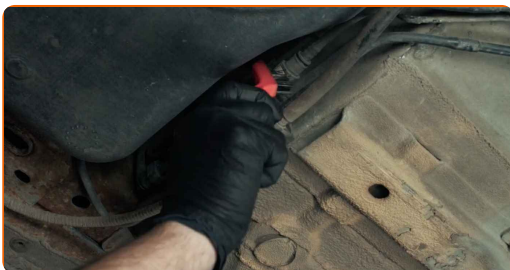

6 Remove the fuel filter. Use a crowbar.



7 Disconnect the fuel supply lines from the fuel filter. Use fuel line pliers.




Replacement: fuel filter – FORD Fiesta Mk5 Van. Tip:

- Be careful! Fuel may leak from the filter housing and hoses.

8 Put the old filter cartridge in the container.



9 Connect the fuel supply lines to the fuel filter.

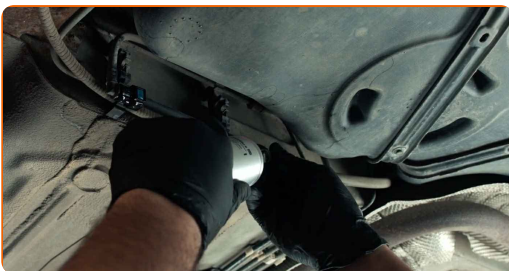

10

Install a new fuel filter.




Replacement: fuel filter – FORD Fiesta Mk5 Van. Tip from AUTODOC:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Take care to only use quality filters.

11

Take the fluid container away from under the fuel filter.

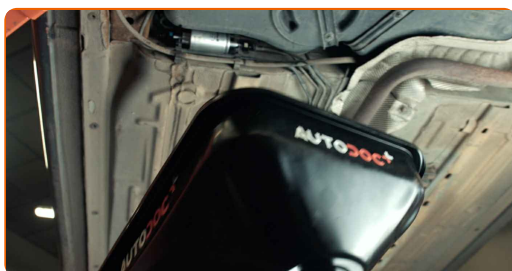

12

Lower the car.

13

Tighten the fuel filler cap.

14

Close the fuel door.

Replacement: fuel filter – FORD Fiesta Mk5 Van. AUTODOC recommends:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

15 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

16 Shut off the engine.

AUTODOC recommends:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

FUEL FILTER: A WIDE SELECTION

(i) DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2021 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.