



How to change air filter  
on **FORD Focus C-Max**  
**(DM2)** – replacement  
guide

## SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

### Important!

This replacement procedure can be used for:  
FORD Focus C-Max (DM2) 1.6 TDCi

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: FORD Focus II Saloon (DB\_, FCH, DH) 1.6 TDCi

REPLACEMENT: AIR FILTER – FORD FOCUS C-MAX (DM2). TOOLS YOU MIGHT NEED:



- Phillips screwdriver
- Microfibre towel
- Fender cover

[Buy tools](#)

Replacement: air filter – FORD Focus C-Max (DM2). AUTODOC experts recommend:

- Replacement: air filter – FORD Focus C-Max (DM2). Follow the maintenance schedule, recommendations, and requirements specified by the manufacturer.
- All work should be done with the engine stopped.

## REPLACEMENT: AIR FILTER – FORD FOCUS C-MAX (DM2). TAKE THE FOLLOWING STEPS:

**1** Open the bonnet.

**2** Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.


**3** Remove the engine cover.




AUTODOC recommends:

- Replacement: air filter – FORD Focus C-Max (DM2). Do not use excessive force when removing the part as this may damage it.


4 Undo the fastening screws of the air filter cover. Use a Phillips screwdriver.

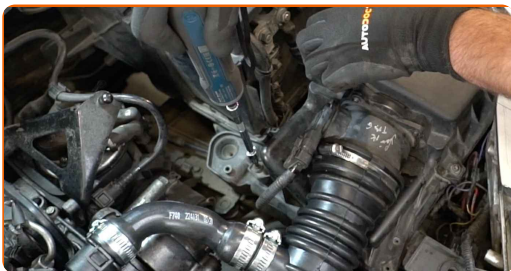

5 Take off the filter lid.

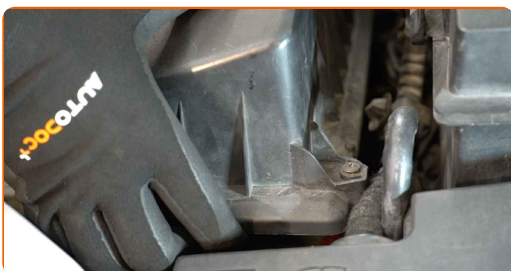

6 Remove the filter element from the filter housing.

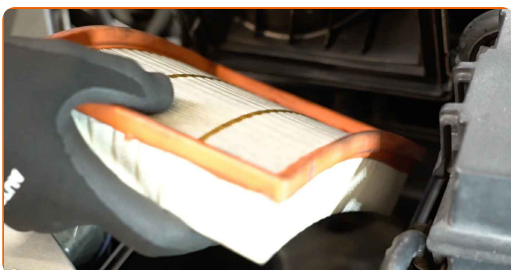

7 Cover the turbocharger impeller with a microfibre cloth to prevent dirt and foreign objects getting into the system.



8 Clean the air filter cover and housing.



Replacement: air filter – FORD Focus C-Max (DM2). AUTODOC experts recommend:

- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.

9

Remove the microfibre cloth from the turbocharger impeller.



10

Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.



AUTODOC recommends:

- Replacement: air filter – FORD Focus C-Max (DM2). Be sure to position the filtering element correctly. Avoid misalignment.
- Take care to only use quality filters.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.

11

Reinstall the air filter cover. Fasten it.



**AUTODOC recommends:**

- Replacement: air filter – FORD Focus C-Max (DM2). Do not use excessive force during installation. This may damage the fasteners.

12

Screw in the fastening screws of the air filter cover. Use a Phillips screwdriver.



13

Install the engine cover and secure it.



## AUTODOC recommends:

- Replacement: air filter – FORD Focus C-Max (DM2). Do not use excessive force during installation. This may damage the fasteners.
- Make sure the engine cover is properly seated. It should not be displaced with respect to the guiding fasteners.

14

Remove the fender protection cover.

15

Close the hood.

**WELL DONE!** [VIEW MORE TUTORIALS](#)



# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**+ AUTODOC**

GET IT ON  
**Google Play**

 Download on the  
**App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**AIR FILTER: A WIDE SELECTION**

## **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.