# - AUTODOC CLUB

How to change pollen filter on FORD Focus Mk1 Box Body / Estate (DNW) – replacement guide



### SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle


# (i) Important!

This replacement procedure can be used for: FORD Focus Mk1 Box Body / Estate (DNW) 1.8 TDDi


The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: FORD FOCUS (DAW, DBW) 1.8 TDCi



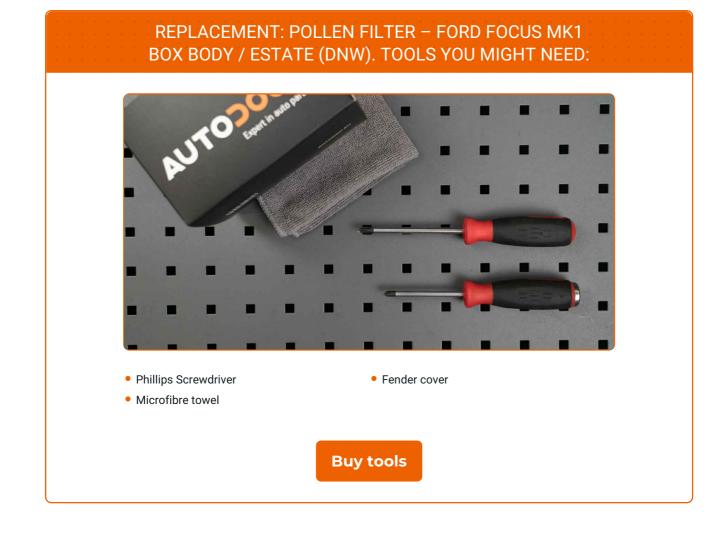



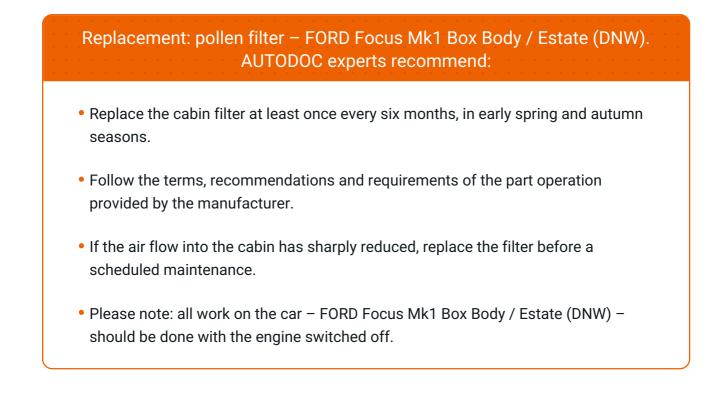

# CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1 Open the bonnet.

2

3

Unscrew the fastener of the wiper cowl grille located on the right side. Use a Phillips screwdriver.

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.



# + AUTODOC CLUB



4

Remove the wiper cowl grille located on the right side.



5

Remove the cabin filter.



#### Replacement: pollen filter – FORD Focus Mk1 Box Body / Estate (DNW). Tip:

• Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.



Clean the cabin filter housing and cover.

Switch on the ignition.

Close the heater flap.

Switch off the ignition.





#### Replacement: pollen filter – FORD Focus Mk1 Box Body / Estate (DNW). Professionals recommend:

• Remove any debris from the cabin filter housing carefully to prevent contamination of the ventilation duct.



Install the cabin filter to its mounting seat.



#### Replacement: pollen filter – FORD Focus Mk1 Box Body / Estate (DNW). AUTODOC experts recommend:

- Follow the air flow direction arrow on the filter.
- Check out the correct location of the filter element. Do not skew.
- Attention! Use quality filters FORD Focus Mk1 Box Body / Estate (DNW).



Install and secure the wiper cowl grille located on the right side.







Screw in the fasteners of wiper cowl grille located on the right side. Use a Phillips screwdriver.





14


Switch on the ignition. The heater flap will automatically return to its normal position.

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.



Switch off the ignition.

Remove the fender protection cover.





VIEW MORE TUTORIALS



# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE



#### A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

#### **POLLEN FILTER: A WIDE SELECTION**

# **i DISCLAIMER**:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.