



How to change rear
suspension lower trailing
arm on **Toyota Prado**
J120 – replacement guide

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:

TOYOTA Land Cruiser Prado 150 (J150) 4.0 V6 VVT-i (GRJ150_, GRJ125_), TOYOTA Land Cruiser Prado 150 (J150) 3.0 D-4D (KDJ155_, KDJ150_), TOYOTA Land Cruiser Prado 120 (J120) 3.0 D, TOYOTA FJ Cruiser (GSJ1_) 4.0 4WD (GSJ15_), TOYOTA Land Cruiser Prado 150 (J150) 2.7 (TRJ150_, TRJ155_), TOYOTA Land Cruiser Prado 120 (J120) 4.0, TOYOTA Land Cruiser Prado 120 (J120) 3.0 D-4D, TOYOTA Land Cruiser Prado 120 (J120) 4.0 (GRJ12), TOYOTA Land Cruiser Prado 120 (J120) 2.7, TOYOTA Land Cruiser Prado 150 (J150) 3.0 D-4D (KDJ150_), TOYOTA Land Cruiser Prado 150 (J150) 4.0 V6 VVTi (GRJ150_), TOYOTA Land Cruiser Prado 150 (J150) 4.0 V6 Dual VVTi (GRJ150_), TOYOTA Land Cruiser Prado 150 (J150) 4.0 V6 VVTi, TOYOTA FJ Cruiser (GSJ1_) 4.0 (GSJ10_), TOYOTA Land Cruiser Prado 150 (J150) 2.8 D-4D (GDJ150_, GDJ155_), (+ 1)

The steps may slightly vary depending on the car design.

REPLACEMENT: REAR SUSPENSION LOWER TRAILING ARM – TOYOTA PRADO J120. TOOLS YOU NEED:



- Wire brush
- WD-40 spray
- Copper grease
- Combination spanner #19
- Drive socket # 12
- Drive socket # 19
- Wheel impact socket #21
- Torque wrench
- Tap wrench
- Crow bar
- Hydraulic transmission jack
- Wheel chock

BUY TOOLS

Replacement: rear suspension lower trailing arm – Toyota Prado J120.
 AUTODOC recommends:

- The replacement procedure is identical for the left and right lower control arms.
- All work should be done with the engine stopped.

REPLACEMENT: REAR SUSPENSION LOWER TRAILING ARM – TOYOTA PRADO J120. TAKE THE FOLLOWING STEPS:

1 Secure the wheels with chocks.


2 Loosen the wheel mounting bolts. Use wheel impact socket #21.



3 Raise the rear of the car and secure on supports.




4 Unscrew the wheel bolts.

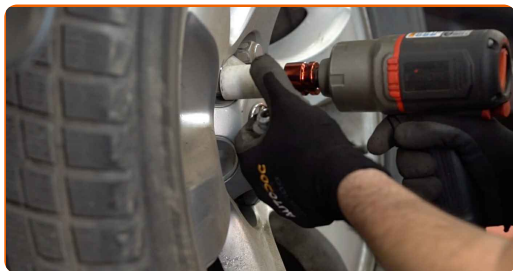


Replacement: rear suspension lower trailing arm – Toyota Prado J120. Tip:

- To avoid injury, hold up the wheel when unscrewing the bolts.

5 Remove the wheel.

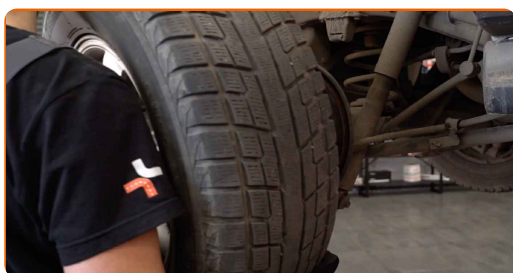


6 Clean all joints of the arm. Use a wire brush. Use WD-40 spray.

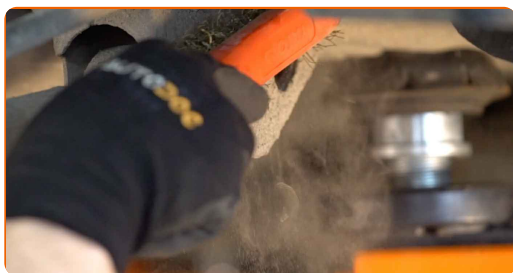


7

Unscrew the arm fastening to the beam. Use a drive socket #19. Use a tap wrench.

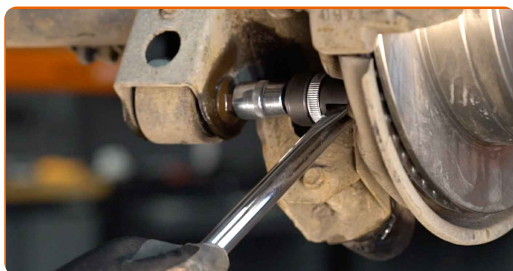


8

Unscrew the fastener connecting the trailing arm to the car body. Use a combination spanner #19. Use a drive socket #19. Use a tap wrench.

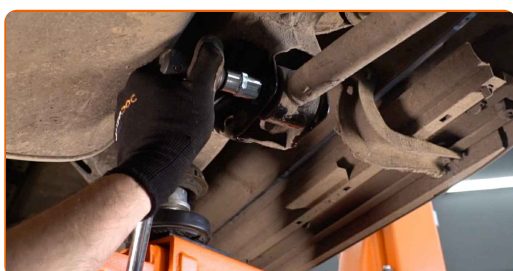

9

Support the rear suspension beam. Use a hydraulic transmission jack.

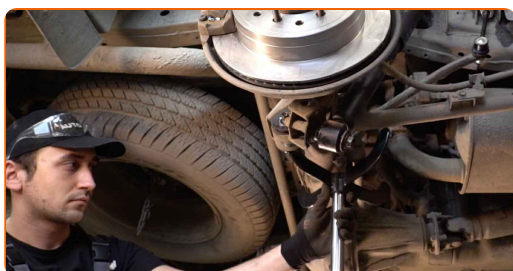


10

Clean the parking brake bracket. Use a wire brush. Use WD-40 spray.



11 Unscrew the bolt and remove the parking brake cable bracket from the trailing arm. Use a drive socket #12.

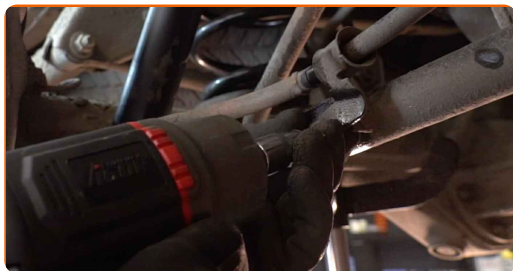


12 Remove the fastening bolts.



13 Remove the arm.



14 Install a new arm.

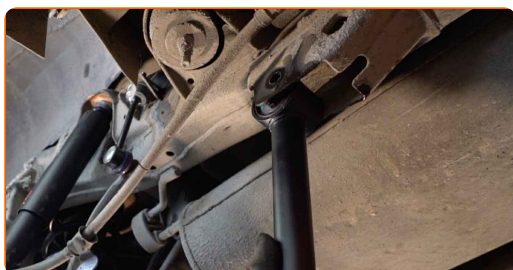


Replacement: rear suspension lower trailing arm – Toyota Prado J120. Tip from AUTODOC experts:

- During the installation process, use only new bolts and nuts.
- Do not damage the ball joint cover.


15

Install the control arm fasteners. Use a crowbar.

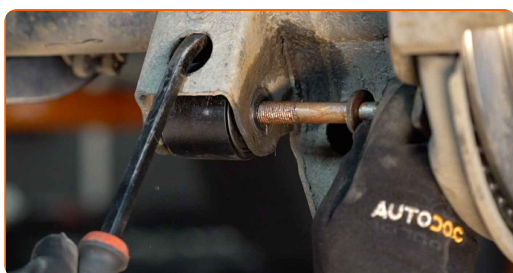


16

Tighten the fastener connecting the trailing arm to the car body. Screw in the fastener connecting the control arm to the rear subframe. Use a combination spanner #19.

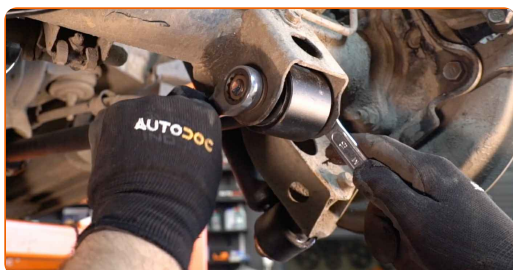

17

Remove the mounting from under the rear axle beam.

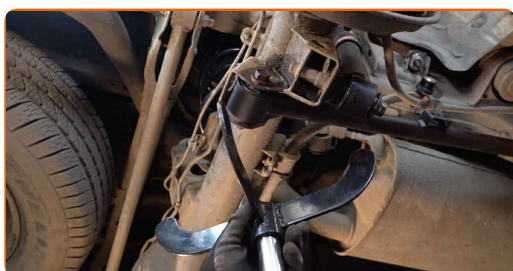

AUTODOC recommends:

- Replacement: rear suspension lower trailing arm – Toyota Prado J120. Lower the transmission jack smoothly, without jerks, to avoid damaging components and mechanisms.

18

Support the arm. Use a hydraulic transmission jack.




19

Tighten the arm fastening to the beam. Use a combination spanner #19. Use a drive socket #19. Use a torque wrench. Tighten it to 130 Nm torque.




20

Tighten the fastener connecting the control arm to the car body. Use a combination spanner #19. Use a drive socket #19. Use a torque wrench. Tighten it to 130 Nm torque.

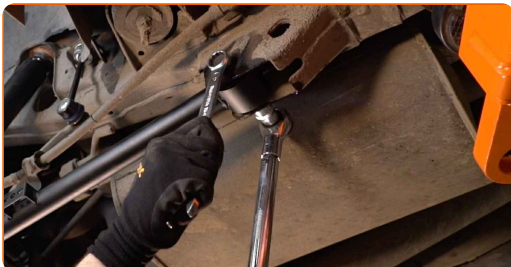

21

Install the bracket attaching the parking brake cable to the trailing arm. Use a drive socket #12.

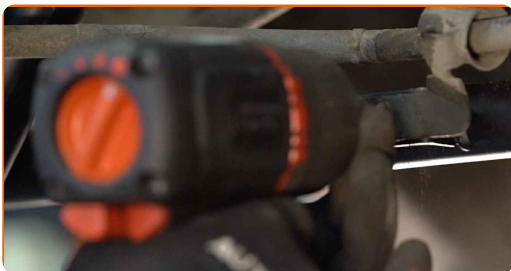

22

Treat all joints of the arm. Use copper grease. Remove the support from under the arm.




AUTODOC recommends:

- Toyota Prado J120 – Do not lower the transmission jack sharply to avoid damaging components and mechanisms of the car.

23

Treat the surface where the brake disc contacts the wheel rim. Use copper grease.

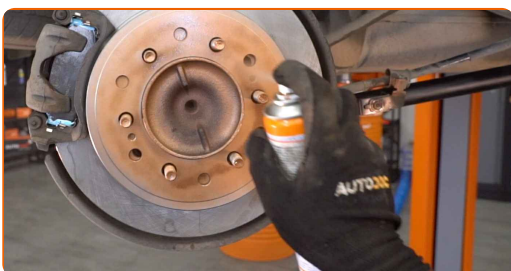

24 Install the wheel.



Replacement: rear suspension lower trailing arm – Toyota Prado J120.
AUTODOC experts recommend:

- To avoid injury, hold up the wheel when screwing in the fastening bolts.

25 Screw in the wheel bolts. Use wheel impact socket #21.



26 Lower the car and working in a cross order, tighten the wheel bolts. Use a torque wrench. Tighten it to 112 nm torque.



27

Remove the jacks and chocks.



WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON  **Google Play**

 **Download on the App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR TOYOTA

CONTROL ARM: A WIDE SELECTION

CHOOSE CAR PARTS FOR TOYOTA PRADO J120

CONTROL ARM FOR TOYOTA: BUY NOW

**CONTROL ARM FOR TOYOTA PRADO J120: THE BEST DEALS
& OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.