



How to change pollen  
filter on **Renault Megane**  
**Scenic** – replacement  
guide

## VIDEO TUTORIAL




### Important!

This replacement procedure can be used for:

RENAULT Megane Scenic (JA) 1.4 i, RENAULT Megane Scenic (JA) 1.6 i, RENAULT Megane Scenic (JA) 1.6 e, RENAULT Megane Scenic (JA) 1.9 dT, RENAULT Megane Scenic (JA) 1.9 D, RENAULT Megane Scenic (JA) 1.9 dTi, RENAULT Megane Scenic (JA) 1.6 16V, RENAULT Megane Scenic (JA) 2.0 i, RENAULT Scénic I (JA0/1, FA0) 1.4 16V, RENAULT Scénic I (JA0/1, FA0) 1.9 dTi, RENAULT Scénic I (JA0/1, FA0) 1.9 dCi, RENAULT Megane Scenic (JA) 2.0 RXE 4x4, RENAULT Scénic I (JA0/1, FA0) 1.9 D, RENAULT Scénic I (JA0/1, FA0) 1.6 BiFuel (JA04)

The steps may slightly vary depending on the car design.

REPLACEMENT: POLLEN FILTER – RENAULT MEGANE  
SCENIC. LIST OF THE TOOLS YOU'LL NEED:

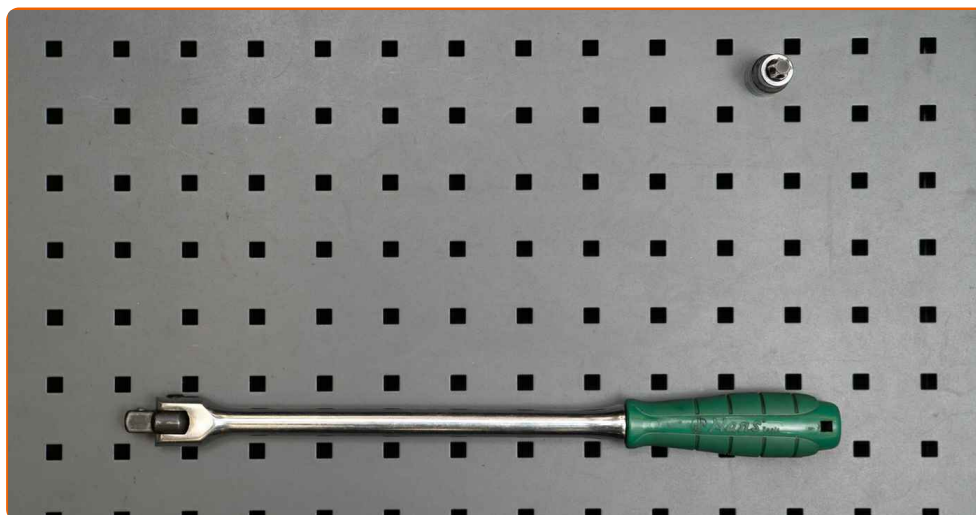

• Drive socket # 5.5

• Tap wrench

**BUY TOOLS**


### Replacement: pollen filter – Renault Megane Scenic. AUTODOC experts recommend:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Please note: all work on the car – Renault Megane Scenic – should be done with the engine switched off.

## CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

**1** Move the passenger seat fully backwards.

**2** Unscrew the fasteners of the cabin filter housing cover. Use a drive socket #5.5. Use a tap wrench.

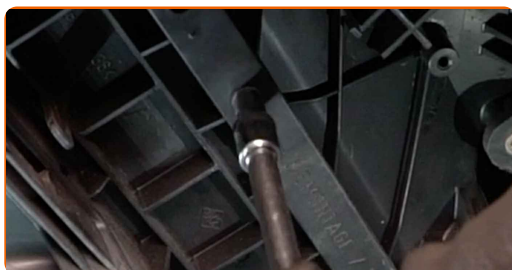


**3** Remove the cabin filter housing cover.



4

Remove the cabin filter.

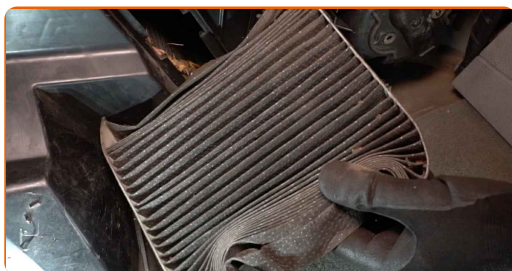

Replacement: pollen filter – Renault Megane Scenic. Tip from AUTODOC:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

5

Clean the cabin filter housing and cover.



Replacement: pollen filter – Renault Megane Scenic. AUTODOC experts recommend:

- Remove any debris from the cabin filter housing carefully to prevent contamination of the ventilation duct.

6

Install the cabin filter to its mounting seat.



### AUTODOC recommends:

- Replacement: pollen filter – Renault Megane Scenic. Be sure to position the filtering element correctly. Avoid misalignment.
- Follow the air flow direction arrow on the filter.
- Attention! Use quality filters – Renault Megane Scenic.


7

Reinstall the cabin filter housing cover.



8

Screw in the fasteners of the cabin filter housing cover. Use a drive socket #5.5. Use a tap wrench.

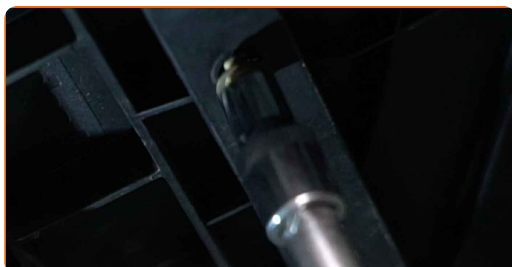

9

Switch on the ignition.


10

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.



11

Switch off the ignition.

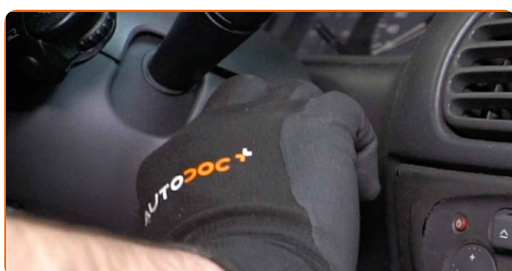

**WELL DONE!** 👍

**VIEW MORE TUTORIALS**

## AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**AUTODOC**

GET IT ON  
**Google Play**

Download on the  
**App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR RENAULT**

**POLLEN FILTER: A WIDE SELECTION**



**CHOOSE CAR PARTS FOR RENAULT MEGANE SCENIC**

**POLLEN FILTER FOR RENAULT: BUY NOW**

**POLLEN FILTER FOR RENAULT MEGANE SCENIC: THE BEST  
DEALS & OFFERS**

### **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.