




How to change pollen
filter on **MERCEDES-
BENZ CLC (CL203)** –
replacement guide

SIMILAR VIDEO TUTORIAL

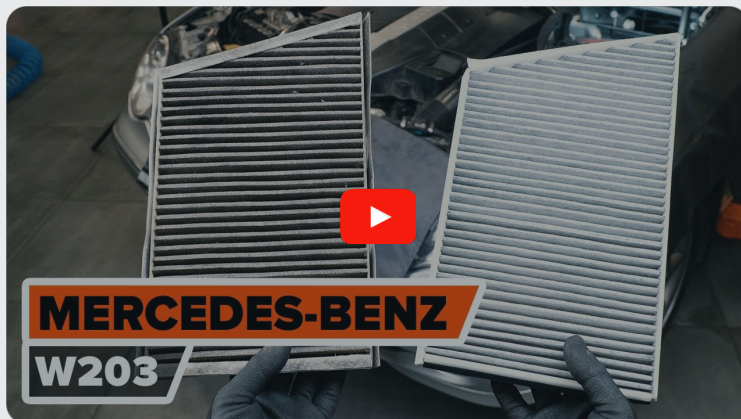

This video shows the replacement procedure of a similar car part on another vehicle

Important!

This replacement procedure can be used for:

MERCEDES-BENZ CLC (CL203) CLC 180 Kompressor (203.746), MERCEDES-BENZ CLC (CL203) CLC 200 Kompressor (203.741), MERCEDES-BENZ CLC (CL203) CLC 230 (203.752), MERCEDES-BENZ CLC (CL203) CLC 350 (203.756), MERCEDES-BENZ CLC (CL203) CLC 200 CDI (203.707), MERCEDES-BENZ CLC (CL203) CLC 220 CDI (203.708), MERCEDES-BENZ CLC (CL203) CLC 160 (203.731)

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: MERCEDES-BENZ C-Class Saloon (W203) C 240 (203.061)

REPLACEMENT: POLLEN FILTER – MERCEDES-BENZ
CLC (CL203). LIST OF THE TOOLS YOU'LL NEED:



- Fender cover

Buy tools

Replacement: pollen filter – MERCEDES-BENZ CLC (CL203). Professionals recommend:


- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- All work should be done with the engine stopped.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1 Open the bonnet.

2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3 Release the cabin filter cover clips.

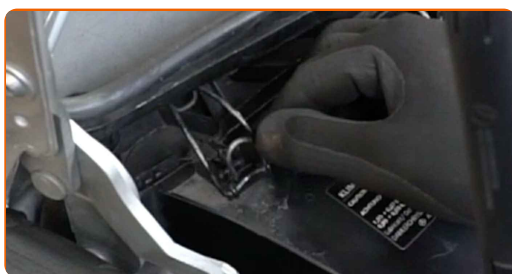

4 Remove the cabin filter housing cover.



AUTODOC recommends:

- Replacement: pollen filter – MERCEDES-BENZ CLC (CL203). To avoid damaging the part when removing it, do not use excessive force.

5

Switch on the ignition.

6


Set the heater flap actuator to the upper position.

7

Switch off the ignition.

8

Clean the cabin filter housing and cover.

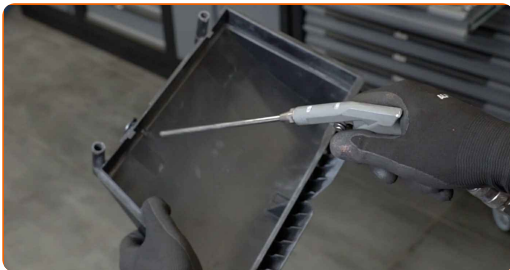


Replacement: pollen filter – MERCEDES-BENZ CLC (CL203). AUTODOC recommends:

- Remove any debris from the cabin filter housing carefully to prevent contamination of the ventilation duct.

9

Remove the filter element from the filter housing.

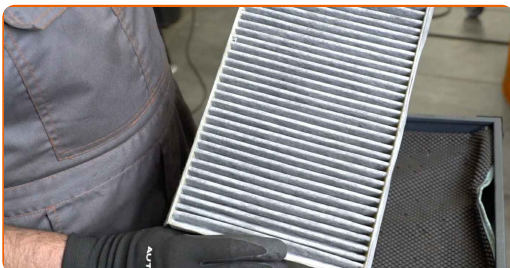

Replacement: pollen filter – MERCEDES-BENZ CLC (CL203). Tip from AUTODOC experts:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

10

Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.



AUTODOC recommends:

- Check out the correct location of the filter element. Do not skew.
- Follow the air flow direction arrow on the filter.
- Attention! Use quality filters – MERCEDES-BENZ CLC (CL203).

11

Reinstall the cabin filter housing cover. Make sure you hear a click indicating that it is locked in place.




Replacement: pollen filter – MERCEDES-BENZ CLC (CL203). Tip:

- When installing, do not use excessive force to avoid damage to the part.

12

Attach the cabin filter cover clips.

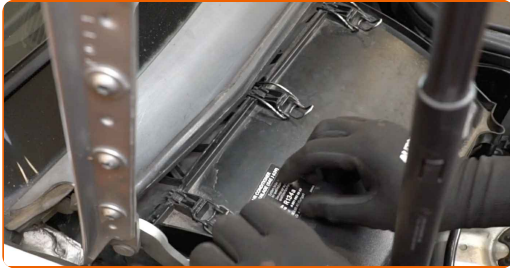

13

Switch on the ignition. This is necessary in order to make sure that the component operates properly.

14

Set the heater flap actuator to the normal position.

15

Switch off the ignition.

16

Remove the fender protection cover.

17

Close the hood.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

POLLEN FILTER: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.