



How to change rear light on **Skoda Octavia 1Z5** – replacement guide

VIDEO TUTORIAL




i Important!

This replacement procedure can be used for:

SKODA Octavia II Combi (1Z5) 1.6 FSI, SKODA Octavia II Combi (1Z5) 1.9 TDI, SKODA Octavia II Combi (1Z5) 2.0 TDI 16V, SKODA Octavia II Combi (1Z5) 2.0 FSI, SKODA Octavia II Combi (1Z5) 2.0 FSI 4x4, SKODA Octavia II Combi (1Z5) 1.9 TDI 4x4, SKODA Octavia II Combi (1Z5) 2.0 RS, SKODA Octavia II Combi (1Z5) 2.0 TDI 4x4, SKODA Octavia II Combi (1Z5) 2.0 TDI, SKODA Octavia II Combi (1Z5) 1.4, SKODA Octavia II Combi (1Z5) 2.0 TDI RS, SKODA Octavia II Combi (1Z5) 1.6 MultiFuel, SKODA Octavia II Combi (1Z5) 1.4 TSI, SKODA Octavia II Combi (1Z5) 1.8 TSI 4x4

The steps may slightly vary depending on the car design.

REPLACEMENT: REAR LIGHT – SKODA OCTAVIA 1Z5.
TOOLS YOU'LL NEED:

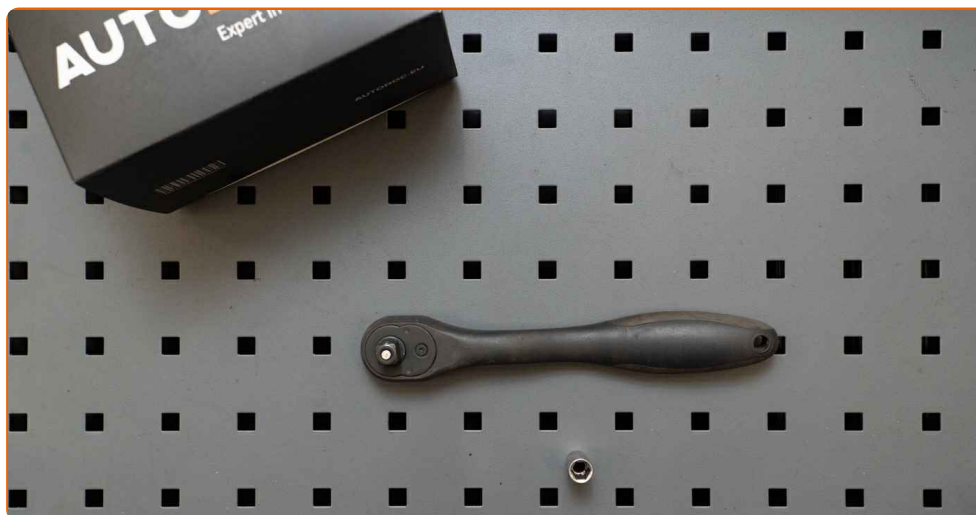

• Drive socket # 8

• Ratchet wrench

BUY TOOLS


Replacement: rear light – Skoda Octavia 1Z5. Professionals recommend:

- Replace both rear lights at the same time.
- The replacement procedure is identical for the right and left rear lights.
- All work should be done with the engine stopped.

REPLACEMENT: REAR LIGHT – SKODA OCTAVIA 1Z5. RECOMMENDED SEQUENCE OF STEPS:

1

Open the boot lid.

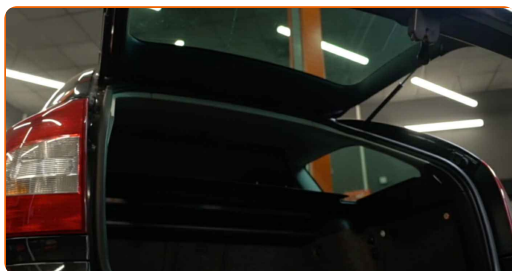

2

Remove the clips of the boot side lining.



3

Detach the boot side lining.



4

Remove the rear light access cover.



5

Disconnect the wiring harness from the rear light.




6

Unscrew the fasteners connecting the rear light to the car body. Use a drive socket #8. Use a ratchet wrench.



7

Remove the rear light.

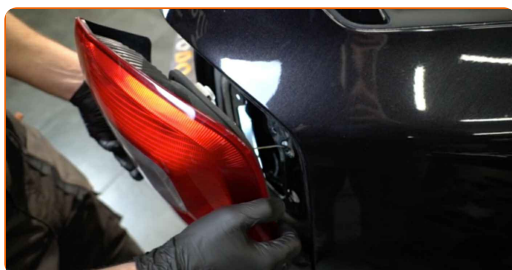


Replacement: rear light – Skoda Octavia 1Z5. AUTODOC experts recommend:

- Do not apply excessive force when removing the part. Otherwise you may damage it.

8

Remove the light bulb from the rear light housing.

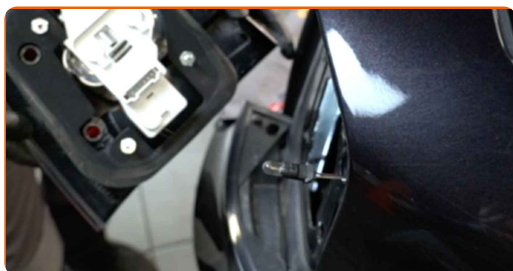

9

Remove the bulb holder together with the bulbs.



AUTODOC recommends:

- Replacement: rear light – Skoda Octavia 1Z5. To avoid damaging the part during installation, do not use excessive force.
- Avoid touching the bulb glass. The finger marks left on it may cause failure.

10

Install the bulb holder together with the bulbs.




Replacement: rear light – Skoda Octavia 1Z5. Tip:

- When installing, do not use excessive force to avoid damage to the part.
- Avoid touching the bulb glass. The finger marks left on it may cause failure.

11

Install the new rear light.

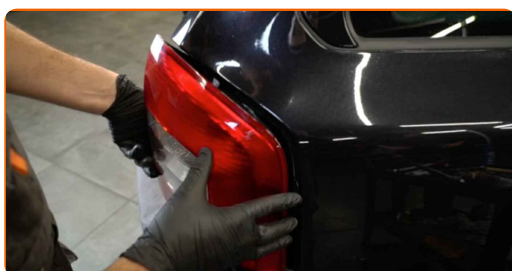


Replacement: rear light – Skoda Octavia 1Z5. Tip from AUTODOC experts:


- When installing, do not use excessive force to avoid damage to the part.

12

Screw in the fasteners connecting the rear light to the car body. Use a drive socket #8. Use a ratchet wrench.

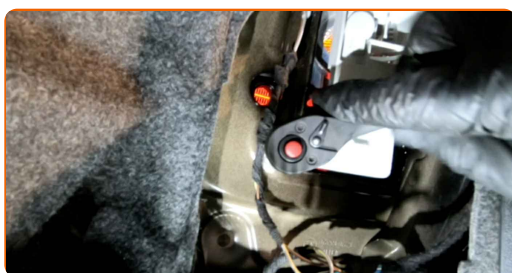

- 13** Install the bulb into the rear light housing.

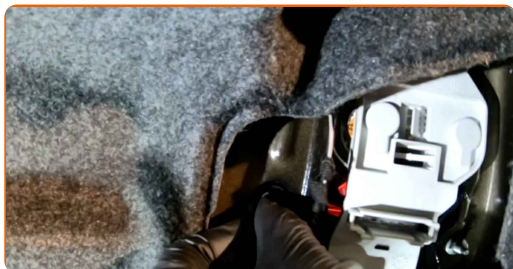


- 14** Reconnect the wiring harness to the rear light.




- 15** Install the rear light access cover.



- 16** Attach the side lining of the boot.

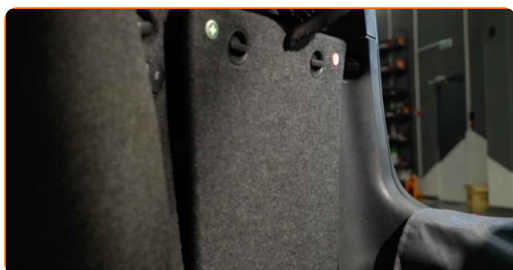


- 17** Install the clips of the boot side lining.

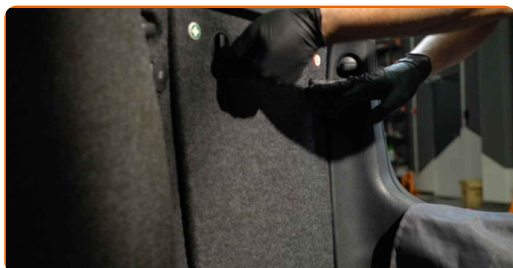


18

Switch on the ignition. This is necessary in order to make sure that the component operates properly.

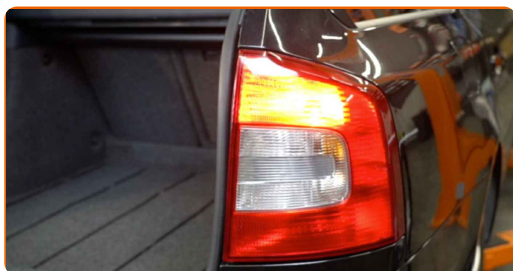


19

Switch off the ignition.

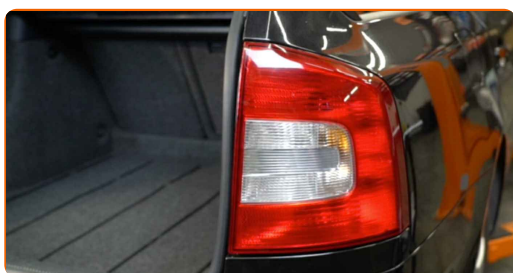

20

Close the lid of the luggage compartment.

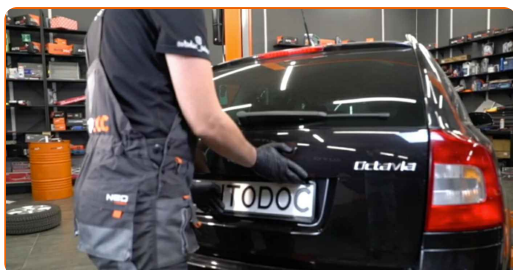

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR SKODA

REAR LIGHT: A WIDE SELECTION

[**CHOOSE CAR PARTS FOR SKODA OCTAVIA 1Z5**](#)[**REAR LIGHT FOR SKODA: BUY NOW**](#)[**REAR LIGHT FOR SKODA OCTAVIA 1Z5: THE BEST DEALS & OFFERS**](#)

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2021 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.