



How to change rear  
brake discs on **Peugeot**  
**206 CC 2D** – replacement  
guide

## VIDEO TUTORIAL


** Important!**

This replacement procedure can be used for:

PEUGEOT 306 Hatchback 1.8, PEUGEOT 306 Hatchback 2.0 XSi, PEUGEOT 306 Hatchback 2.0 S16, PEUGEOT 306 Convertible 1.8, PEUGEOT 306 Convertible 2.0, PEUGEOT 306 Saloon 1.8 ST, PEUGEOT 306 Saloon 1.9 SRDT, PEUGEOT 306 Saloon 2.0 ST, PEUGEOT 306 Saloon 2.0 S16, PEUGEOT 106 II Hatchback (1A, 1C) 1.6 S16, PEUGEOT 106 II Hatchback (1A, 1C) 1.6 i, PEUGEOT 306 Hatchback 1.8 16V, PEUGEOT 306 Saloon 1.8 16V, PEUGEOT 306 Convertible 1.8 16V, PEUGEOT 306 Estate 1.8 16V, (+ 25)

The steps may slightly vary depending on the car design.

REPLACEMENT: BRAKE DISCS – PEUGEOT 206 CC 2D.  
LIST OF THE TOOLS YOU'LL NEED:

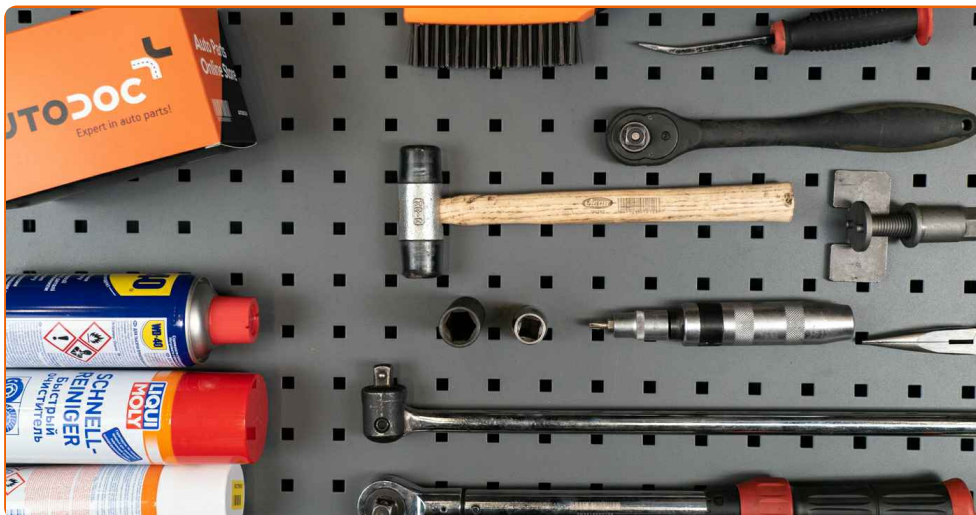

- Wire brush
- WD-40 spray
- Brake cleaner
- Copper grease
- Drive socket # 19
- Torx bit T30
- Wheel impact socket #19
- Brake caliper wind back tool
- Ratchet wrench
- Torque wrench
- Rubber mallet
- Round-nose pliers
- Impact screwdriver
- Crow bar
- Wheel chock

**BUY TOOLS**


### Replacement: brake discs – Peugeot 206 CC 2D. AUTODOC experts recommend:

- Replace the brake disks on the car Peugeot 206 CC 2D in complete set for each axis. Regardless of the state of components. This will ensure even braking.
- The replacement procedure is identical for both brake disks on the same axle.
- When changing the brake discs, always replace the brake pads.
- Warning! Shut down the engine before starting any work – Peugeot 206 CC 2D.

## CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1

Open the bonnet. Unscrew the brake fluid reservoir cap.

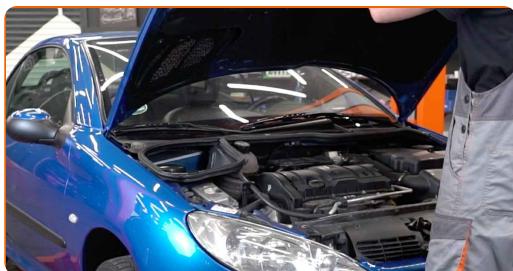

2

Secure the wheels with chocks.



**3** Loosen the wheel mounting bolts. Use wheel impact socket #19.



**4** Raise the rear of the car and secure on supports.



**5** Unscrew the wheel bolts.



**Replacement: brake discs – Peugeot 206 CC 2D. Tip:**

- To avoid injury, hold up the wheel when unscrewing the bolts.

**6** Remove the wheel.




7

Remove the retaining springs of the brake pads. Use a crowbar.




8

Remove the brake pad retaining pin. Use round-nose pliers.

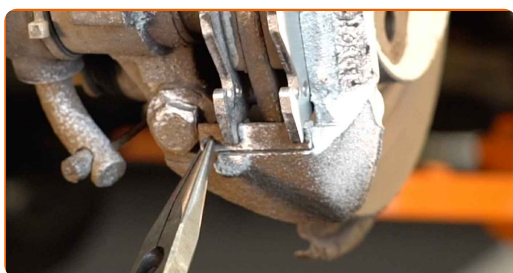


9

Clean the brake caliper fasteners. Use a wire brush. Use WD-40 spray.

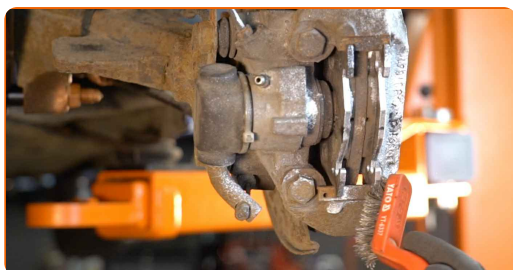


10


Remove the retainer of the brake pads. Use a crowbar. Use a rubber mallet.

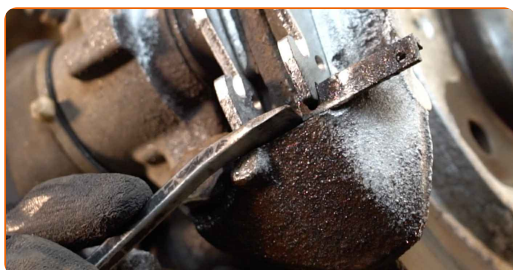

**11** Remove the brake pads. Use a crowbar.

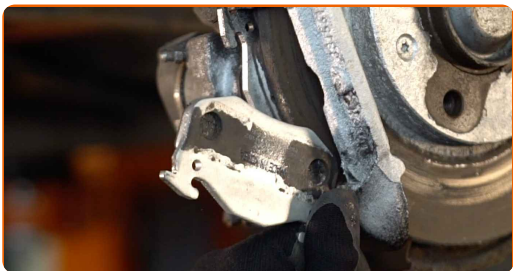


**12** Clean the brake caliper fasteners. Use a wire brush. Use WD-40 spray.

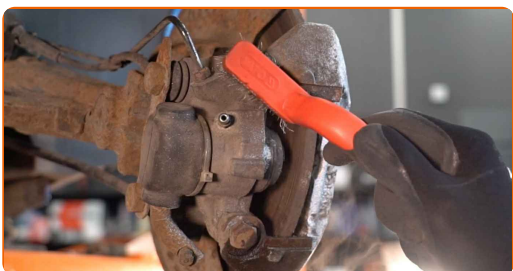

**13** Unscrew the brake caliper fastening. Use a drive socket #19. Use a ratchet wrench.



**14** Remove the brake caliper.

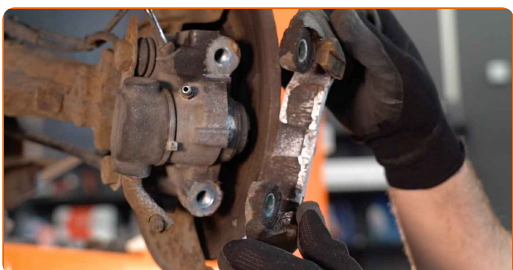


Replacement: brake discs – Peugeot 206 CC 2D. AUTODOC experts recommend:

- Tie the caliper to the suspension or to the body with a wire without disconnecting from the brake hose to prevent depressurization of the brake system.
- Make sure that the brake caliper is not hanging on the brake hose.
- Don't press the brake pedal after the brake caliper has been removed. As a result, the piston can fall out from the brake cylinder, and brake fluid leakage and depressurization of the system may occur.
- Check the brake caliper bracket, brake caliper guide pins and boots. Clean them. Replace, if necessary.


15

Clean the brake disc fasteners. Use a wire brush. Use WD-40 spray.

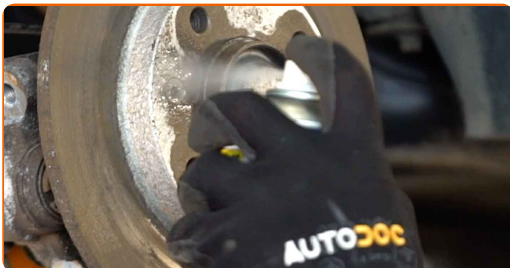


16

Unscrew the brake disc fastening. Use Torx T30. Use an impact screwdriver.

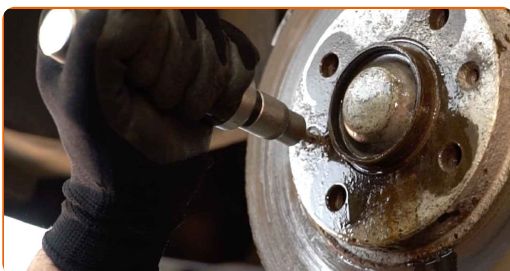




**17** Remove the brake disc.

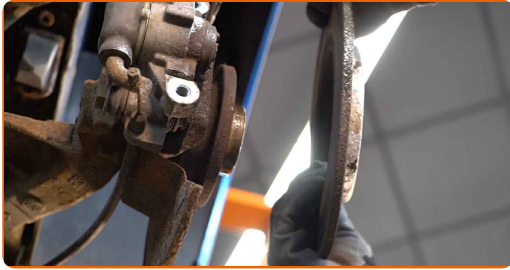

**18** Clean the hub. Use a wire brush. Treat the contacting surface. Use copper grease.




**19** Treat the brake caliper piston. Use a brake cleaner.

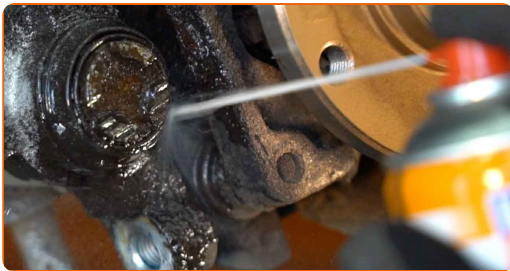

**AUTODOC recommends:**

- Replacement: brake discs – Peugeot 206 CC 2D. After applying the spray, wait a few minutes.


**20** Press in the brake caliper piston. Use brake caliper wind back tool.

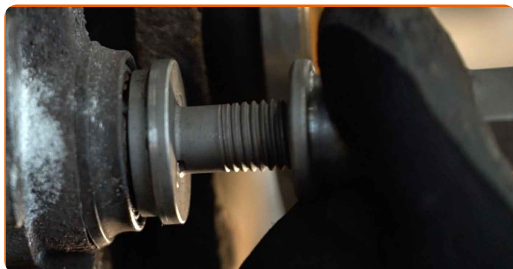


**21** Install the brake disc.




**22** Tighten the brake disc fastening. Use Torx T30. Use a torque wrench. Tighten it to 9 Nm torque.

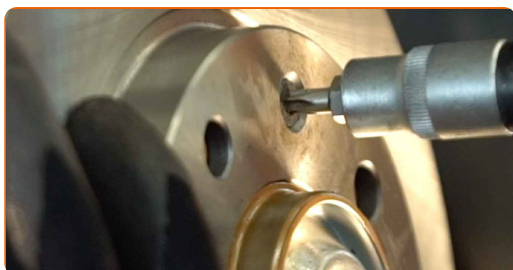

**23** Install the brake caliper and fix it. Use a drive socket #19. Use a torque wrench. Tighten it to 110 Nm torque.

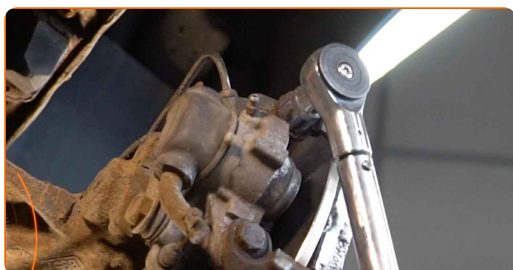


**24** Install the brake pads.

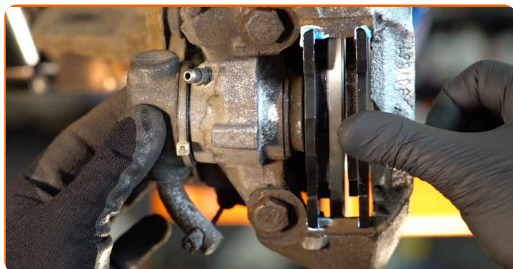


**25** Install the retainer of the brake pads. Use a crowbar.




**26** Install the brake pad retaining pin.

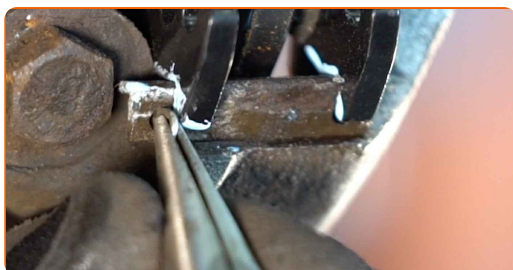

**27** Install the retaining springs of the brake pads.

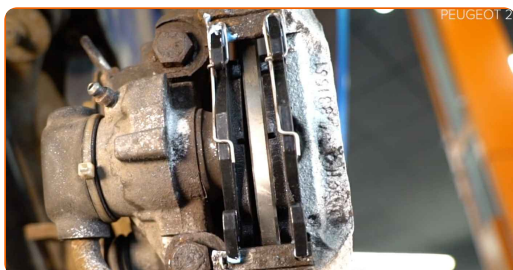


**28** Treat the surface where the brake disc contacts the wheel rim. Use copper grease.

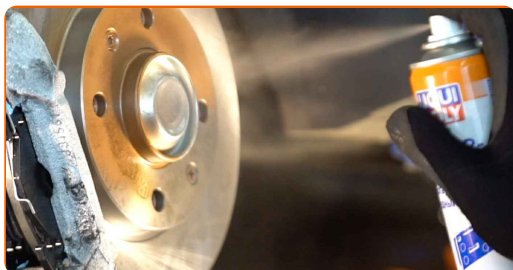

29

Clean the brake disk surface. Use a brake cleaner.

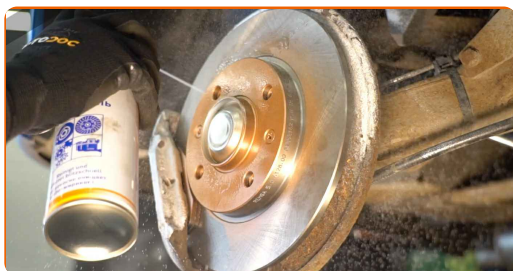

Replacement: brake discs – Peugeot 206 CC 2D. Tip from AUTODOC experts:

- After applying the spray, wait a few minutes.

30

Install the wheel.




AUTODOC recommends:

- Important! Hold the wheel while screwing in the fastening bolts. Peugeot 206 CC 2D

31

Screw in the wheel bolts. Use wheel impact socket #19.

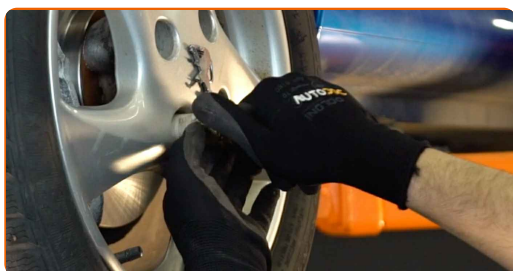

**32**

Lower the car and working in a cross order, tighten the wheel bolts. Use a torque wrench. Tighten it to 100 Nm torque.



**33**

Remove the jacks and chocks.



**AUTODOC recommends:**

- Peugeot 206 CC 2D – Press the brake pedal several times with the engine shut down until you feel the resistance built up.
- Check the brake fluid level in the expansion tank and refill if necessary.

**34**

Tighten the brake fluid reservoir cap. Close the hood.



**WELL DONE!** 

**VIEW MORE TUTORIALS**

# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**+ AUTODOC**

GET IT ON  **Google Play**

 **Download on the App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR PEUGEOT**

**BRAKE DISCS: A WIDE SELECTION**

**CHOOSE CAR PARTS FOR PEUGEOT 206 CC 2D**

**BRAKE DISCS FOR PEUGEOT: BUY NOW**

**BRAKE DISCS FOR PEUGEOT 206 CC 2D: THE BEST DEALS & OFFERS**

### **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.