- AUTODOC CLUB

How to change front brake pads on **RENAULT SUPER 5 (B/C40_)** – replacement guide



SIMILAR VIDEO TUTORIAL




This video shows the replacement procedure of a similar car part on another vehicle

(i) Important!

This replacement procedure can be used for: RENAULT SUPER 5 (B/C40_) 1.0, RENAULT SUPER 5 (B/C40_) 1.1

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: RENAULT TWINGO I (C06_) 1.2

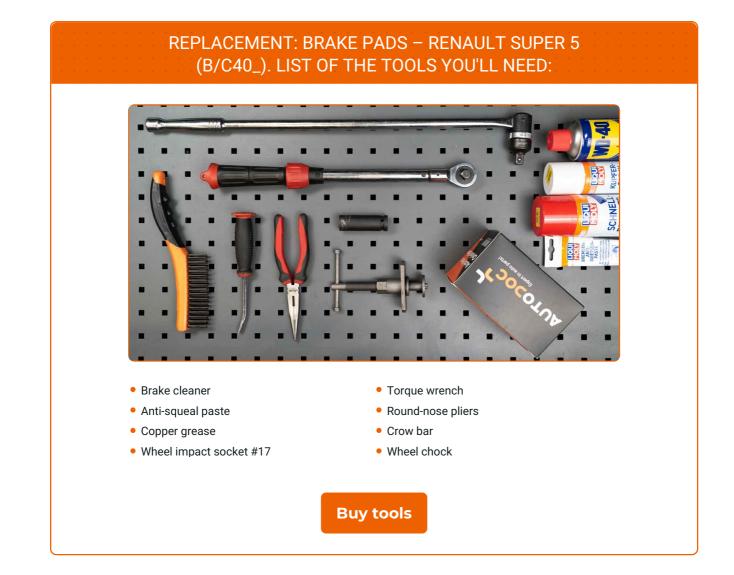

ß

O

+ AUTODOC CLUB



Replacement: brake pads – RENAULT SUPER 5 (B/C40_). Tip from AUTODOC experts:

- Perform the replacement of brake pads in complete set for each axis. This provides effective braking.
- The replacement procedure is identical for all brake pads on the same axle.
- All work should be done with the engine stopped.

REPLACEMENT: BRAKE PADS – RENAULT SUPER 5 (B/C40_). USE THE FOLLOWING PROCEDURE:



Open the bonnet. Unscrew the brake fluid reservoir cap.



Secure the wheels with chocks.





Loosen the wheel mounting bolts. Use wheel impact socket #17.



4

Raise the front of the car and secure on supports.





Unscrew the wheel bolts.



AUTODOC recommends:

 Important! Hold the wheel while unscrewing the fastening bolts. RENAULT SUPER 5 (B/C40_)



Remove the wheel.





Spread the brake pads. Use a crowbar.



8

Remove the brake pad retaining pin. Use a crowbar.



+ AUTODOC CLUB



9

Remove the retainer of the brake pads.



10

Remove the brake pads.



Replacement: brake pads - RENAULT SUPER 5 (B/C40_). Tip:

 Measure the brake disc thickness. Upon reaching the wear limit the part must be replaced.

11

Treat the brake pads in the area where their surface comes into contact with the brake caliper bracket. Use antisqueal paste.



Replacement: brake pads – RENAULT SUPER 5 (B/C40_). AUTODOC recommends:

• Make sure the disc surface is clean before installing the pads.





Install new brake pads.



Replacement: brake pads – RENAULT SUPER 5 (B/C40_). AUTODOC experts recommend:

• Make sure the pads are installed with linings facing the disc.



Install the retainer of the brake pads.



14

Install the brake pad retaining pin. Use round-nose pliers.



15

Treat the surface where the brake disc contacts the wheel rim. Use copper grease.







Clean the brake disk surface. Use a brake cleaner.



AUTODOC recommends:

 Replacement: brake pads – RENAULT SUPER 5 (B/C40_). After applying the spray, wait a few minutes.

17

Install the wheel.



Replacement: brake pads – RENAULT SUPER 5 (B/C40_). Tip from AUTODOC experts:

• To avoid injury, hold up the wheel when screwing in the fastening bolts.

18

Screw in the wheel bolts. Use wheel impact socket #17.





19

Lower the car and working in a cross order, tighten the wheel bolts. Use a torque wrench. Tighten it to 90 Nm torque.



20

Remove the jacks and chocks.



AUTODOC recommends:

 Important! Replacement: brake pads – RENAULT SUPER 5 (B/C40_). Check the brake fluid level in the reservoir and top up if necessary.



Tighten the brake fluid reservoir cap.



AUTODOC recommends:

 RENAULT SUPER 5 (B/C40_) – Without starting the engine, press the brake pedal several times until it feels firm. 22

Close the hood.

Replacement: brake pads – RENAULT SUPER 5 (B/C40_). Tip:

• Slow down smoothly for first 150-200 km after the brake pads replacement. Avoid unneccessary and sharp braking to a stop.



VIEW MORE TUTORIALS

6

0)



AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE



A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BRAKE PADS: A WIDE SELECTION

i DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.