




How to change air filter  
on **Renault Scenic 2** –  
replacement guide

## VIDEO TUTORIAL

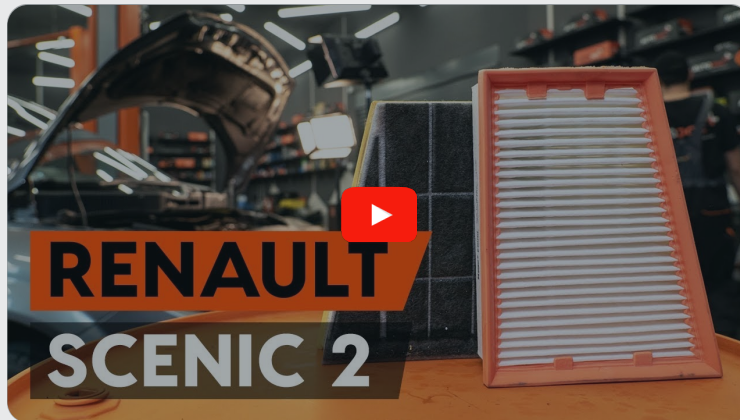

### **ⓘ Important!**

This replacement procedure can be used for:

RENAULT Megane II Sport Tourer (KM) 1.9 dCi, RENAULT Megane II Hatchback (BM, CM) 1.9 dCi, RENAULT Scénic II (JM) 1.9 dCi, RENAULT Megane II Hatchback (BM, CM) 1.5 dCi (BM02, BM13, BM2A, CM02, CM13), RENAULT Megane II Coupé-Cabriolet (EM) 1.9 dCi, RENAULT Megane II Saloon (LM) 1.9 dCi, RENAULT Grand Scénic II (JM) 1.9 dCi, RENAULT Grand Scénic II (JM) 2.0, RENAULT Megane II Hatchback (BM, CM) 2.0 Renault Sport, RENAULT Scénic II (JM) 2.0 16V Turbo, RENAULT Megane II Hatchback (BM, CM) 2.0 16V Turbo, RENAULT Megane II Coupé-Cabriolet (EM) 2.0 16V Turbo, RENAULT Scénic II (JM) 1.5 dCi, RENAULT Megane II Saloon (LM) 1.5 dCi (LM1F), RENAULT Megane II Saloon (LM) 1.5 dCi (LM1E), (+ 12)

The steps may slightly vary depending on the car design.

## REPLACEMENT: AIR FILTER – RENAULT SCENIC 2. LIST OF THE TOOLS YOU'LL NEED:



- Drive socket # 10
- Ratchet wrench
- Phillips screwdriver
- Microfibre towel
- Fender cover

[BUY TOOLS](#)

Replacement: air filter – Renault Scenic 2. AUTODOC recommends:

- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- Please note: all work on the car – Renault Scenic 2 – should be done with the engine switched off.


**CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:**

1 Open the bonnet.




2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3 Unscrew the fastener of the wiper cowl grille located on the left side. Use a drive socket #10. Use a ratchet wrench.

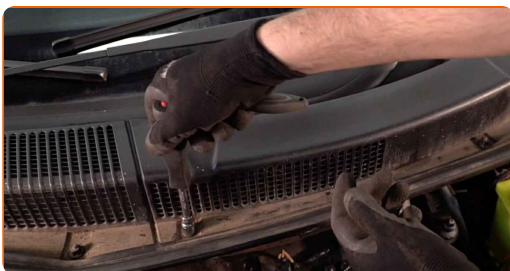

4 Remove the rubber strip.

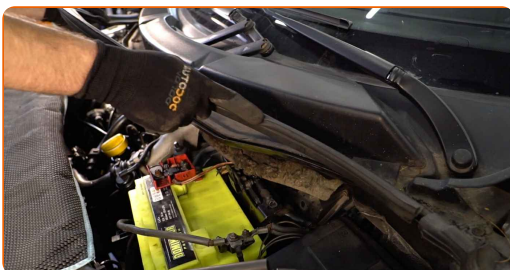

5

Remove the wiper cowl grille located on the left side.




6

Unscrew fixing bolts of the protective cover. Use a drive socket #10. Use a ratchet wrench.




7

Remove the protective cover.

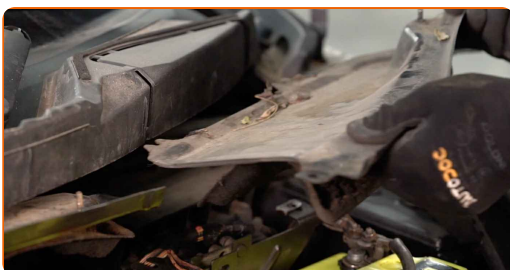

8

Unscrew the filter housing fastening bolts. Use a Phillips screwdriver.

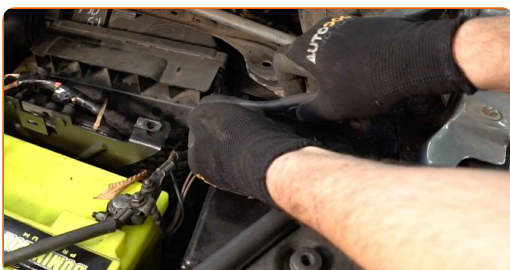

9


Raise a little the top protective cover. Remove the air filter housing.



10 Remove the filter element from the filter housing.




11 Clean the air filter cover and housing.

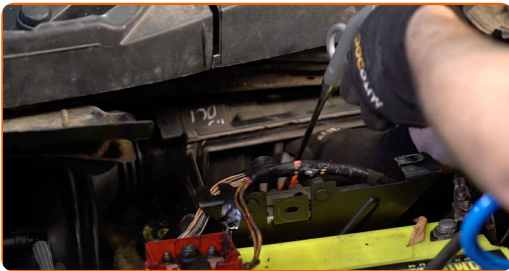

### Replacement: air filter – Renault Scenic 2. Tip:

- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.

12 Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.

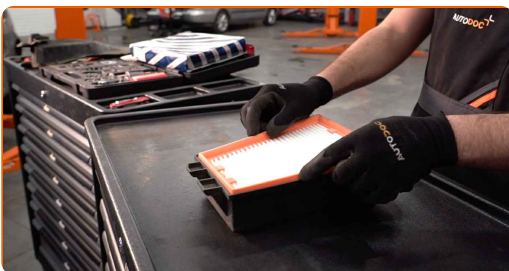



Replacement: air filter – Renault Scenic 2. Tip from AUTODOC:

- Check out the correct location of the filter element. Do not skew.
- Renault Scenic 2 – It's important to only use high-quality filters.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.


13

Raise a little the top protective cover.




14

Reinstall the air filter housing.

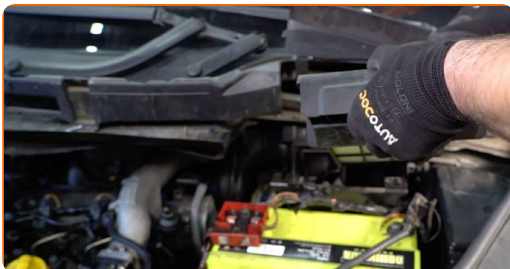


15

Screw the filter housing fastening bolts. Use a Phillips screwdriver.

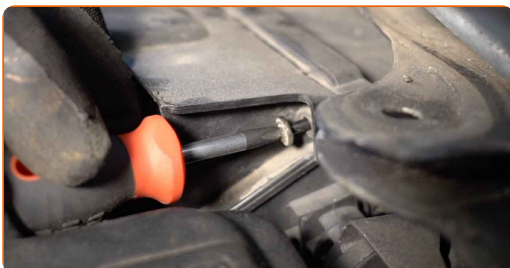


16 Install the protective cover.

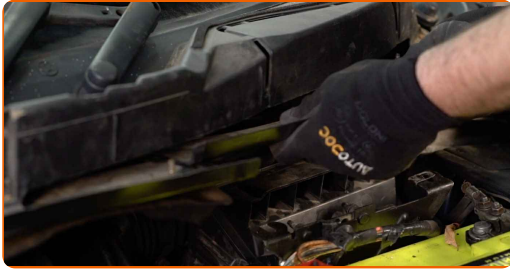

17 Tighten fixing bolts of the protective cover. Use a drive socket #10. Use a ratchet wrench.




18 Install the wiper cowl grille on the left side.

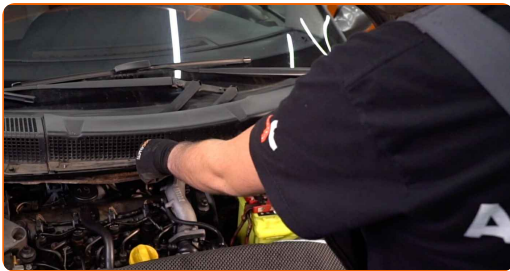

19 Screw in the fastener of the wiper cowl grille located on the left side. Use a drive socket #10. Use a ratchet wrench.




20 Install the rubber strip.

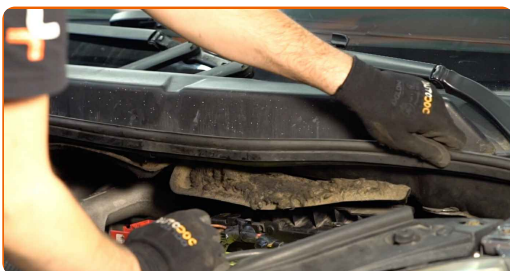



21

Remove the fender protection cover.

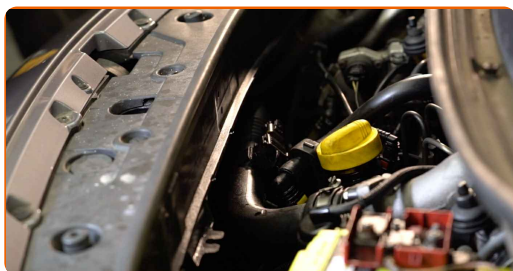

22

Close the hood.

**WELL DONE!** [VIEW MORE TUTORIALS](#)

## AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

**AUTODOC+**

GET IT ON  
Google Play

Download on the  
App Store

Download

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR RENAULT**

**AIR FILTER: A WIDE SELECTION**

**CHOOSE CAR PARTS FOR RENAULT SCENIC 2**

**AIR FILTER FOR RENAULT: BUY NOW**

**AIR FILTER FOR RENAULT SCENIC 2: THE BEST DEALS &  
OFFERS**

### **ⓘ DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2021 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.