



How to change front
upper arm on **VW**
Transporter T4 –
replacement guide

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:

VW Transporter IV Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.4 D Syncro, VW Transporter IV Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.5 Syncro, VW Transporter IV Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.5, VW Transporter IV Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 1.9 TD, VW Transporter IV Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.4 D, VW Transporter IV Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.0, VW Transporter IV Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.5 TDI, VW Transporter IV Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.5 TDI Syncro, VW Transporter IV Van (70A, 70H, 7DA, 7DH) 2.0, VW Transporter IV Van (70A, 70H, 7DA, 7DH) 2.5, VW Transporter IV Van (70A, 70H, 7DA, 7DH) 1.9 TD, VW Transporter IV Van (70A, 70H, 7DA, 7DH) 2.4 D, VW Transporter IV Van (70A, 70H, 7DA, 7DH) 2.5 Syncro, VW Transporter IV Van (70A, 70H, 7DA, 7DH) 2.4 D Syncro, VW Transporter IV Platform / Chassis (70E, 70L, 70M, 7DE, 7DL) 1.9 TD, (+ 12)

The steps may slightly vary depending on the car design.

**REPLACEMENT: FRONT UPPER ARM – VW
TRANSPORTER T4. LIST OF THE TOOLS YOU'LL NEED:**



- Wire brush
- WD-40 spray
- Brake cleaner
- Copper grease
- Drive socket # 18
- Drive socket # 21
- Combination spanner #18
- Combination spanner #21
- Combination spanner #24
- Combination spanner #27
- Wheel impact socket #17
- Ratchet wrench
- Torque wrench
- Pin punch
- Hammer
- Crow bar
- Wheel chock

BUY TOOLS

Replacement: front upper arm – VW Transporter T4. AUTODOC recommends:

- The replacement procedure is identical for the right and left upper control arms.
- All work should be done with the engine stopped.

REPLACEMENT: FRONT UPPER ARM – VW TRANSPORTER T4. RECOMMENDED SEQUENCE OF STEPS:

1

Secure the wheels with chocks.



2


Loosen the wheel mounting bolts. Use wheel impact socket #17.

3

Raise the front of the car and secure on supports.

4


Unscrew the wheel bolts.

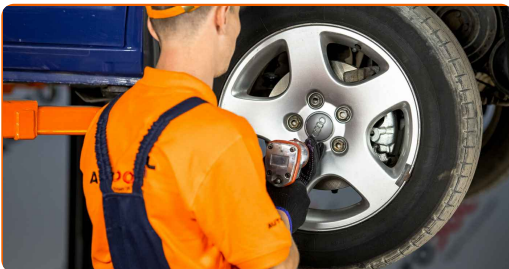


Replacement: front upper arm – VW Transporter T4. Tip:

- To avoid injury, hold up the wheel when unscrewing the bolts.

5 Remove the wheel.

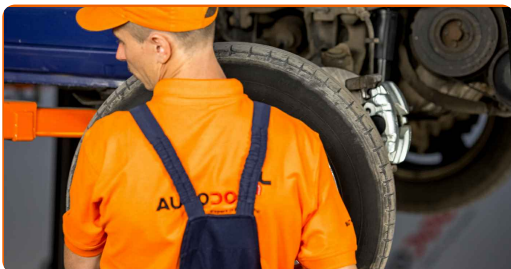

6 Loosen the tension of the torsion bars. Use a combination spanner #27.

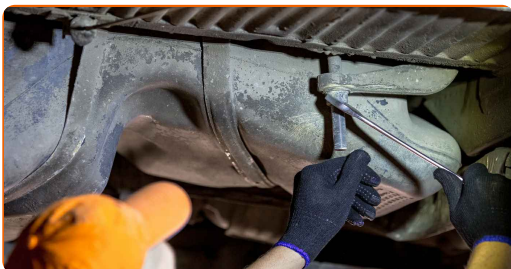

7 Clean the shock strut fasteners. Use a wire brush. Use WD-40 spray.



8

Unscrew the fastener connecting the shock strut to the suspension control arm.



8.2

Use a combination spanner #21. Use a drive socket #21. Use a ratchet wrench.




9

Remove the fastening bolt. Use a pin punch. Use a hammer.



10

Unscrew the top fastening of the shock strut. Use a drive socket #18. Use a ratchet wrench.

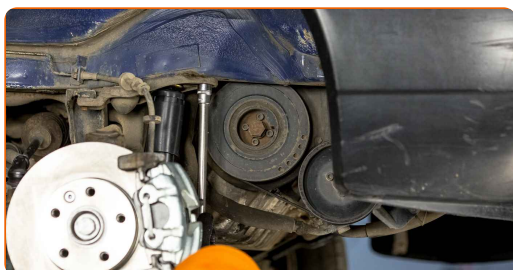

AUTODOC recommends:


- Important! Hold the suspension strut while unscrewing the fastening bolts. VW Transporter T4

11 Remove the suspension strut.



12 Clean the fastener connecting the ball joint to the steering knuckle. Use a wire brush. Use WD-40 spray.


13 Unscrew the top fastening of the ball joint. Use a combination spanner #24.

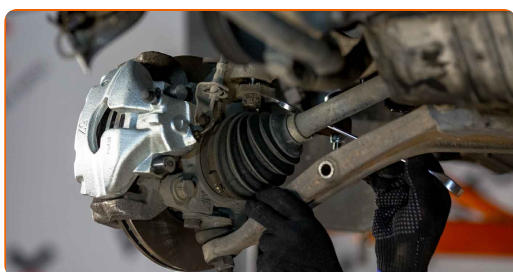


14 Disconnect the ball joint from the steering knuckle. Use a crowbar. Use a hammer.



15 Unscrew the subframe fastening. Use a drive socket #18. Use a ratchet wrench.

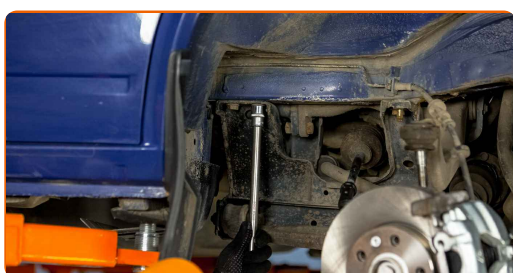


16 Unscrew the subframe fastening. Use a drive socket #21. Use a ratchet wrench.

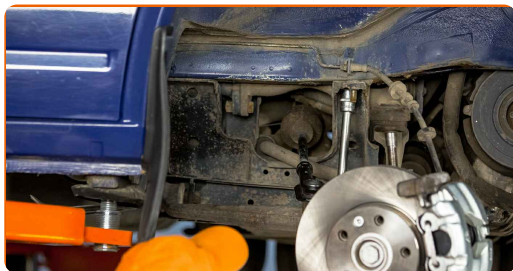


17 Clean all joints of the arm. Use a wire brush. Use WD-40 spray.




18 Unscrew the upper control arm fasteners (2 pieces). Use a combination spanner #21. Use a drive socket #21. Use a ratchet wrench.

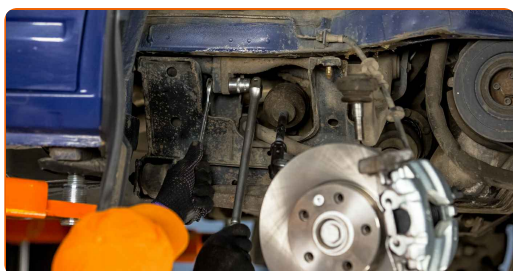

19 Remove the fastening bolts.

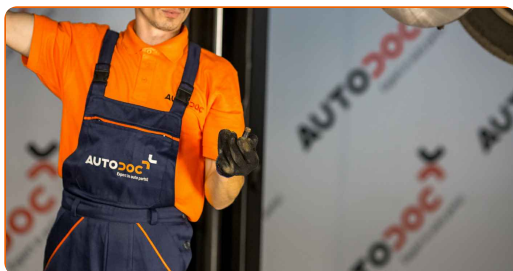


- 20 Unscrew the rear fastener connecting the control arm to the subframe. Use a combination spanner #18. Use a drive socket #18. Use a ratchet wrench.

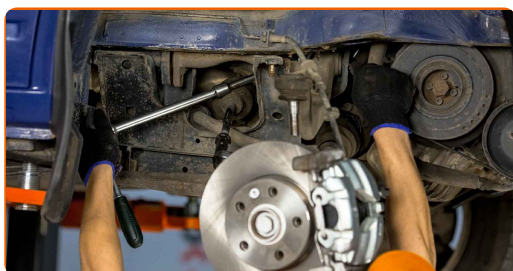


- 21 Unscrew the front arm fastener. Use a combination spanner #18. Use a drive socket #18. Use a ratchet wrench.

- 22 Remove the fastening bolts.


- 23 Unscrew the engine mount fastener that connects it to the subframe. Use a drive socket #21. Use a ratchet wrench.

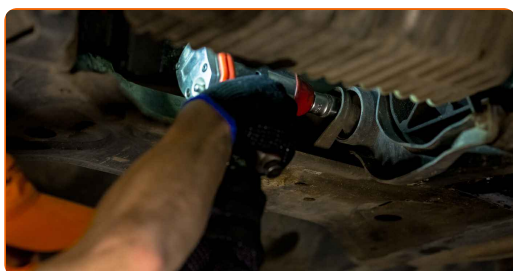

- 24 Support the arm. Use a hydraulic transmission jack.

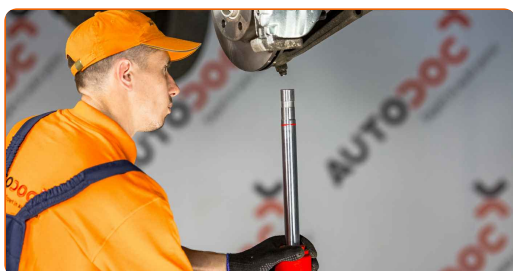

- 25 Remove the arm. Use a crowbar.

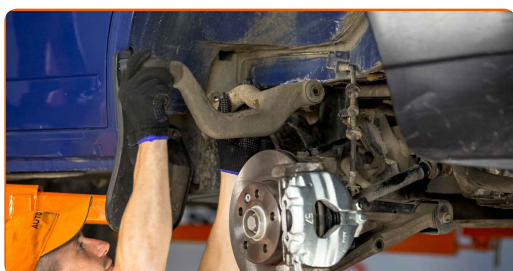

26 Clean the mounting seats and the thread of the suspension arm. Use a wire brush. Use WD-40 spray.


27 Install a new arm.



Replacement: front upper arm – VW Transporter T4. Tip from AUTODOC experts:

- During the installation process, use only new bolts and nuts.
- Do not damage the ball joint cover.
- Position the control arm according to its mounting holes.

28 Install the fastening bolts. Use a hammer. Use a crowbar.

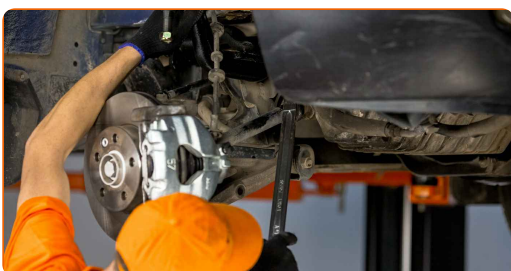

29 Raise the hydraulic transmission jack by 10-15 cm.



30

Tighten the subframe fastening. Use a drive socket #21. Use a ratchet wrench.

31


Tighten the subframe fastening. Use a drive socket #18. Use a ratchet wrench.

32

Tighten the front fastener connecting the control arm to the subframe. Use a combination spanner #18. Use a drive socket #18. Use a torque wrench. Tighten it to 100 Nm torque.


33

Tighten the rear fastener connecting the control arm to the subframe. Use a combination spanner #18. Use a drive socket #18. Use a torque wrench. Tighten it to 100 Nm torque.

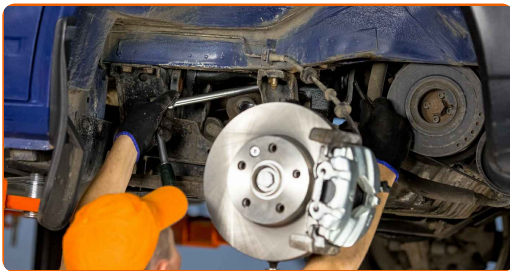

34

Install the fastening bolts. Use a crowbar.

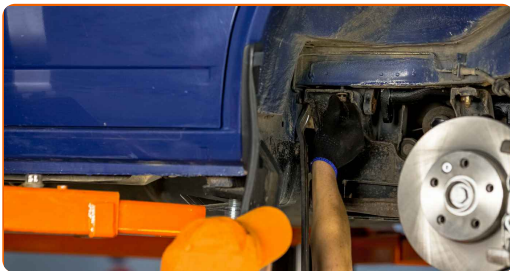

35

Tighten the upper control arm fasteners (2 pieces). Use a combination spanner #21. Use a drive socket #21. Use a torque wrench. Tighten it to 160 Nm torque.



36

Remove the support from under the arm.



AUTODOC recommends:

- Replacement: front upper arm – VW Transporter T4. Lower the transmission jack smoothly, without jerks, to avoid damaging components and mechanisms.

37

Connect the ball joint to the steering knuckle.



38

Support the arm. Use a hydraulic transmission jack.


39

Tighten the top fastening of the ball joint. Use a combination spanner #24. Use a torque wrench. Tighten it to 110 Nm torque.



40

Remove the support from under the arm.

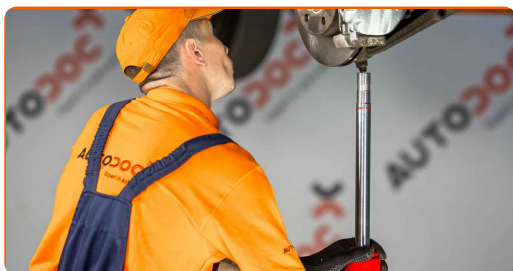


AUTODOC recommends:

- VW Transporter T4 – Do not lower the transmission jack sharply to avoid damaging components and mechanisms of the car.


41

Install the shock strut into the wheel arch.

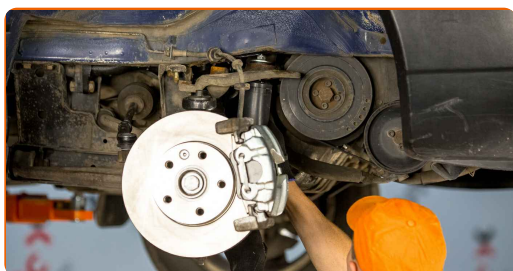

42

Tighten the shock strut top mount. Use a drive socket #18. Use a torque wrench. Tighten it to 100 Nm torque.

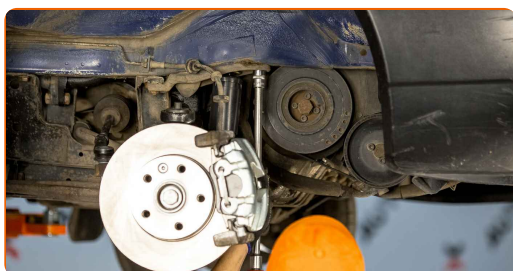


- 43** Screw in the fastener connecting the suspension strut to the control arm. Use a drive socket #21. Use a ratchet wrench.




- 44** Install the fastening bolt.

- 45** Support the arm. Use a hydraulic transmission jack.

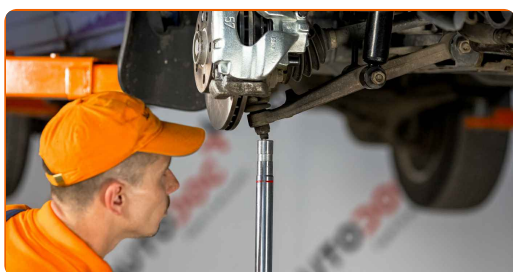

- 46** Tighten the fastener connecting the shock strut to the suspension control arm. Use a drive socket #21. Use a torque wrench. Tighten it to 160 Nm torque.


- 47** Remove the support from under the arm.

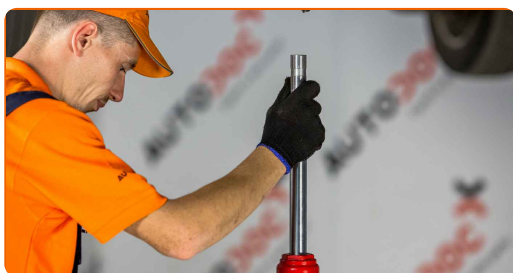

Replacement: front upper arm – VW Transporter T4. Tip from AUTODOC:

- Lower the hydraulic transmission jack smoothly, without jerks, to avoid damaging assemblies and mechanisms.

- 48** Tighten the fastening bolt connecting the engine mount to the subframe. Use a drive socket #21. Use a torque wrench. Tighten it to 160 Nm torque.

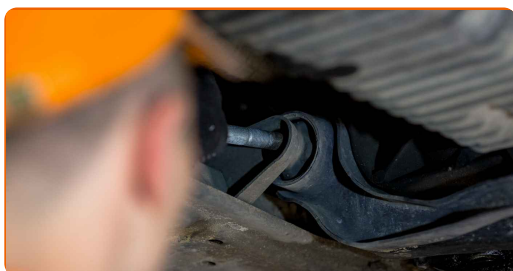


- 49** Tighten the tension of the torsion bars. Use a combination spanner #24.



- 50** Treat the surface where the brake disc contacts the wheel rim. Use copper grease.

- 51** Clean the brake disc surface. Use a brake cleaner.

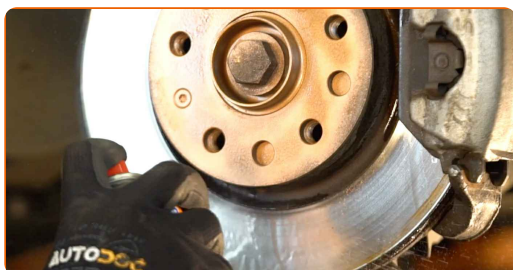

AUTODOC recommends:

- Replacement: front upper arm – VW Transporter T4. After applying the spray, wait a few minutes.

52

Install the wheel.



AUTODOC recommends:

- To avoid injury, hold up the wheel when screwing in the fastening bolts.

53

Screw in the wheel bolts. Use wheel impact socket #17.



54

Lower the car and working in a cross order, tighten the wheel bolts. Use a torque wrench. Tighten it to 160 nm torque.



55

Remove the jacks and chocks.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR VW

CONTROL ARM: A WIDE SELECTION

CHOOSE CAR PARTS FOR VW TRANSPORTER T4

CONTROL ARM FOR VW: BUY NOW

**CONTROL ARM FOR VW TRANSPORTER T4: THE BEST
DEALS & OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.