



How to change front
wheel bearing on
**TOYOTA AURIS (NRE15_,
ZZE15_, ADE15_, ZRE15_,
NDE15_)** – replacement
guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!


This replacement procedure can be used for:

TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) 1.8 (ZRE152_), TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) 1.8 4WD (ZRE154_), TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) 1.5 (NZE151_), TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) 2.2 D (ADE157_), TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) 2.0 D-4D (ADE150_), TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) 1.4 D-4D (NDE150_), TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) 1.6 (ZRE151_), TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) 1.4 (ZZE150_), TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) 1.8 (ZRE152_, ZZE122), TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) 1.33 Dual-VVTi (NRE150_), TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) 1.8 Hybrid (ZWE150_)

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: TOYOTA RAV 4 III (ACA3_, ACE_, ALA3_, GSA3_, ZSA3_) 2.4 (ACA33)

**REPLACEMENT: WHEEL BEARING – TOYOTA AURIS
(NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_). LIST OF
THE TOOLS YOU'LL NEED:**

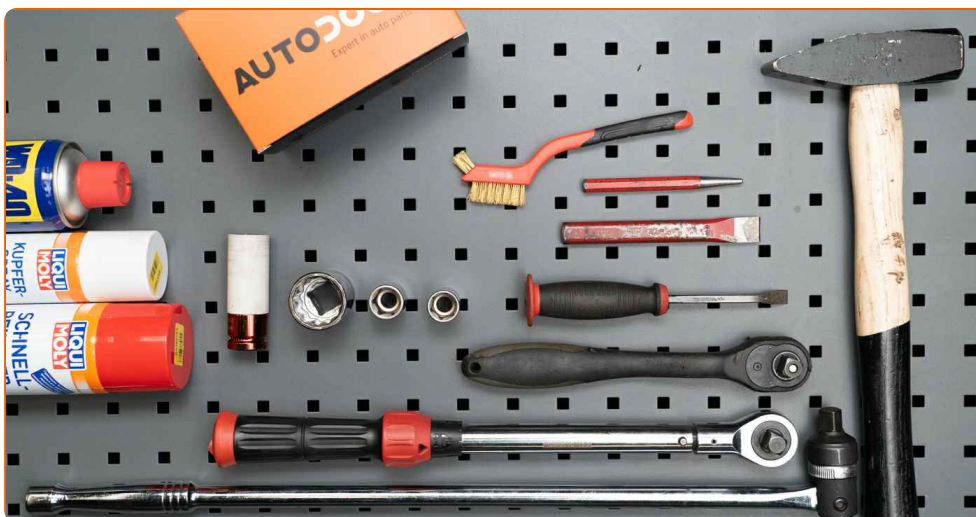

- Wire brush
- WD-40 spray
- Copper grease
- Drive socket # 17
- Drive socket # 18
- Drive socket # 30
- Wheel impact socket #21
- Ratchet wrench
- Torque wrench
- Flat chisel
- Tap wrench
- Hammer
- Pin punch
- Crow bar
- Hydraulic transmission jack
- Wheel chock

Buy tools

Replacement: wheel bearing – TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_). AUTODOC experts recommend:

- Do not re-use the bearing assembly of your TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) car.
- The wheel hub bearing replacement procedure is identical for both wheels on the same axle.
- Please note: all work on the car – TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) – should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:


1

Clean the wheel hub fastener. Use WD-40 spray.




2

Unstake the fastener of the driveshaft. Use a pin punch. Use a hammer.

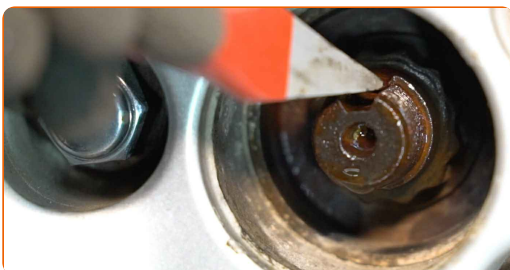

3 Loosen the fastener of the driveshaft. Use a drive socket #30. Use a tap wrench.

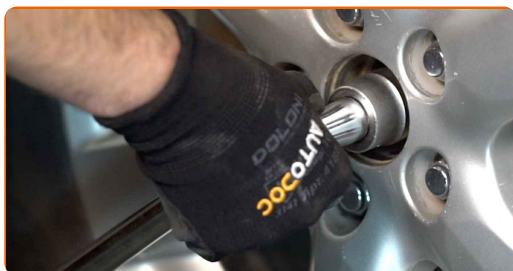


4 Secure the wheels with chocks.

5 Loosen the wheel mounting bolts. Use wheel impact socket #21.



6 Raise the front of the car and secure on supports.

7 Unscrew the wheel bolts.

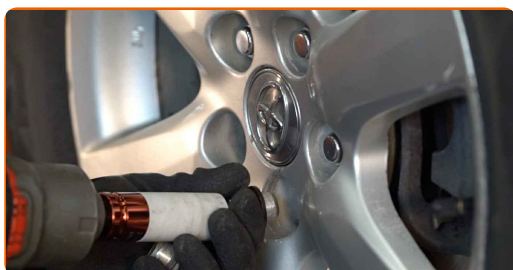

Replacement: wheel bearing – TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_). Tip:

- To avoid injury, hold up the wheel when unscrewing the bolts.


8 Remove the wheel.




9 Spread the brake pads. Use a crowbar.




10 Clean the brake caliper bracket fasteners. Use a wire brush. Use WD-40 spray.

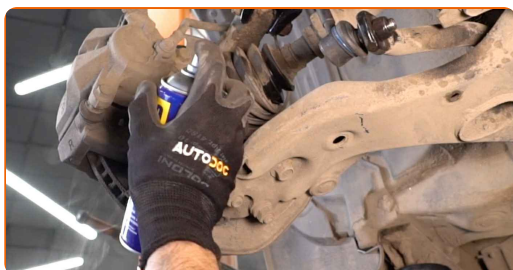

11 Unscrew the caliper bracket fastening. Use a drive socket #17. Use a tap wrench.

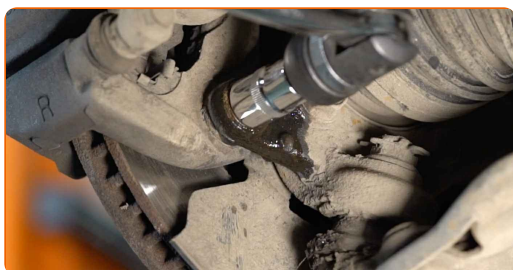

12 Remove the caliper bracket.

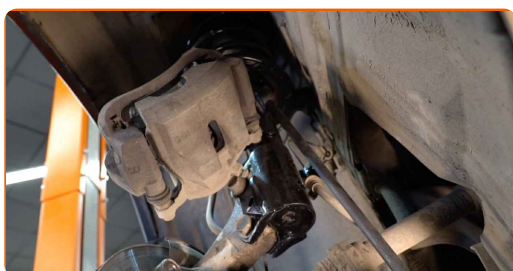


Replacement: wheel bearing – TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_). AUTODOC recommends:

- Tie the caliper to the suspension or to the body with a wire without disconnecting from the brake hose to prevent depressurization of the brake system.


13

Clean the brake disc fasteners. Use a wire brush. Use WD-40 spray.

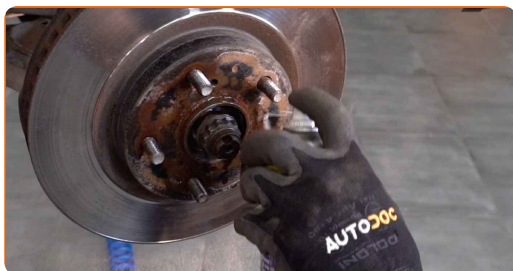

14

Remove the brake disc.

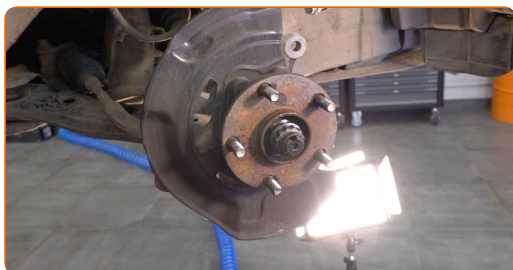

15

Clean the fasteners connecting the ball joint to the suspension control arm. Use a wire brush. Use WD-40 spray.



16

Unscrew the fastener connecting the ball joint to the suspension control arm. Use a drive socket #17.




17

Disconnect the spherical joint from the arm. Use a crowbar.

18

Unscrew the fastener connecting the drive shaft to the wheel hub. Use a drive socket #30. Use a tap wrench.

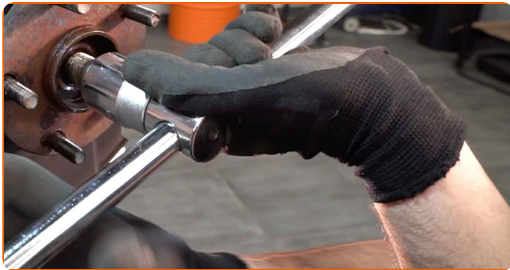

19

Treat the splines of the driveshaft CV joint. Use WD-40 spray.



20


Remove the drive shaft. Use a pin punch. Use a hammer.

Replacement: wheel bearing – TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_). Tip from AUTODOC experts:

- Make sure that the drive shaft is not unloaded (when the car is jacked).

21

Prop up the steering knuckle. Use a hydraulic transmission jack.

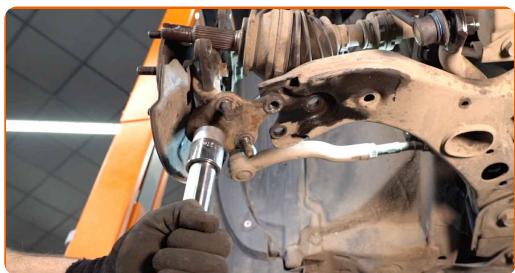


22

Clean the fasteners of the wheel hub bearing. Use a wire brush. Use WD-40 spray.




23

Unscrew the hub bearing mounting. Use a drive socket #17. Use a tap wrench.

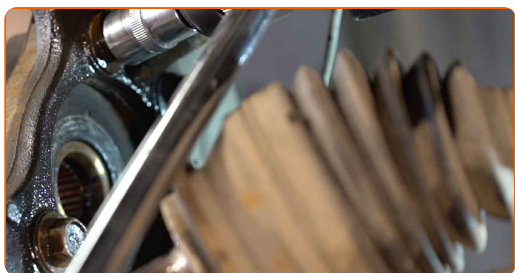


24


Remove the hub and the bearing together, since they are a sealed unit. Use a crowbar. Use a hammer.

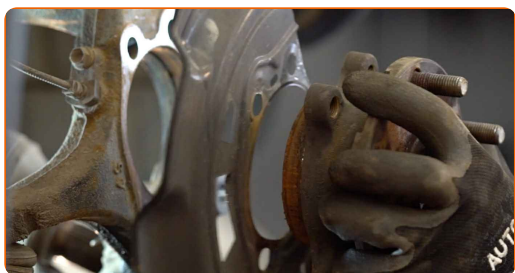


25 Clean the hub bearing mounting seat. Use a wire brush. Use WD-40 spray.

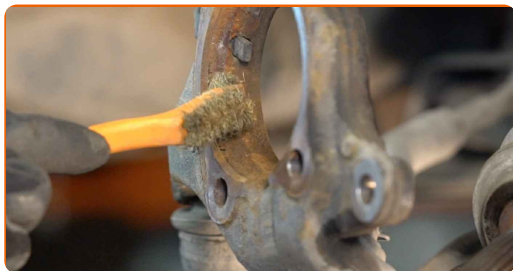


26 Install the new wheel hub with a bearing.

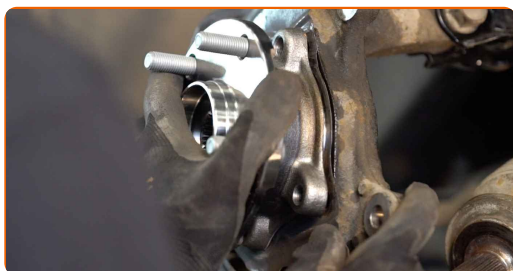

27 Tighten the wheel hub bearing fasteners. Use a drive socket #17. Use a ratchet wrench.

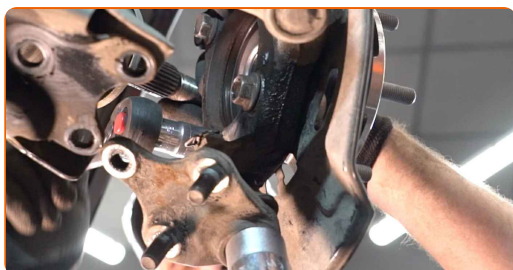


28 Tighten the fastener of the wheel hub bearing. Use a drive socket #17. Use a torque wrench. Tighten it to 96 nm torque.

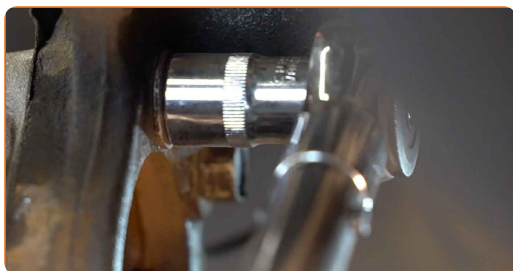

29

Treat the splines of the driveshaft CV joint. Use copper grease.

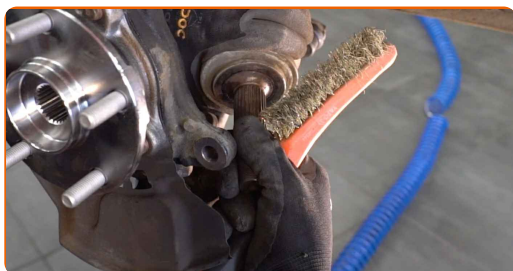

30

Remove the support from under the steering knuckle.



AUTODOC recommends:


- Replacement: wheel bearing – TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_). Lower the transmission jack smoothly, without jerks, to avoid damaging components and mechanisms.

31


Mount the drive shaft into the wheel hub.




32 Attach the ball joint to the control arm. Use a crowbar.

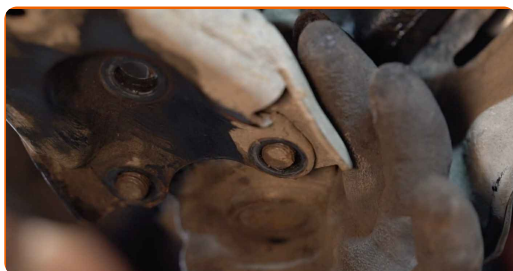


33 Screw the fasteners of the ball joint. Use a drive socket #17.

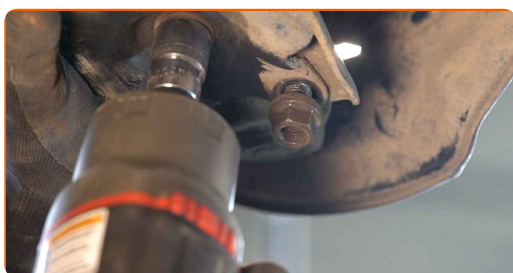


34 Tighten the ball joint fastener. Use a drive socket #17. Use a torque wrench. Tighten it to 92 nm torque.

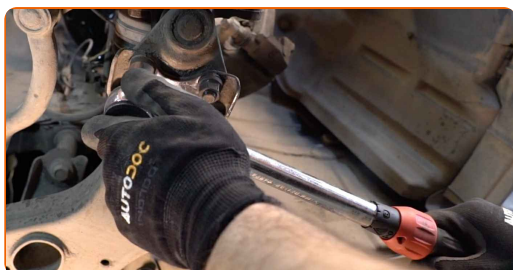

35 Treat the hub where it contacts the brake disk. Use copper grease.

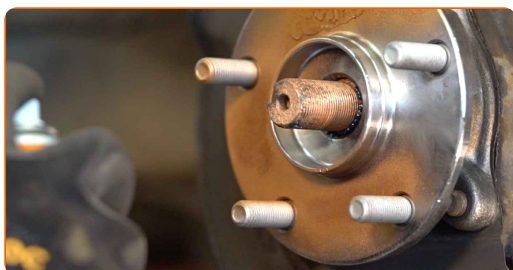


36 Install the brake disc.

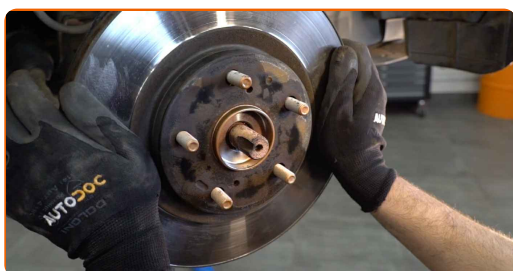


37 Clean the mounting seats of the caliper and its bracket. Use a wire brush. Use WD-40 spray.


38 Install the brake caliper bracket.

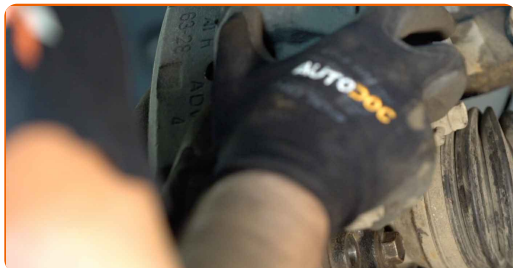

39 Tighten the brake caliper bracket. Use a drive socket #18. Use a torque wrench. Tighten it to 98 nm torque.

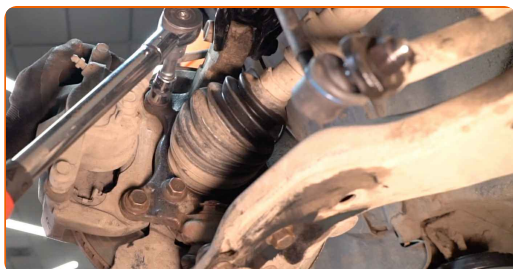

40 Screw the nut of the drive shaft. Use a drive socket #30. Use a tap wrench.

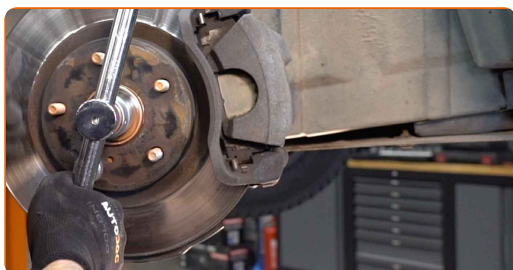


41 Clean the brake disk surface. Use a wire brush.




42

Treat the surface where the brake disc contacts the wheel rim. Use copper grease.

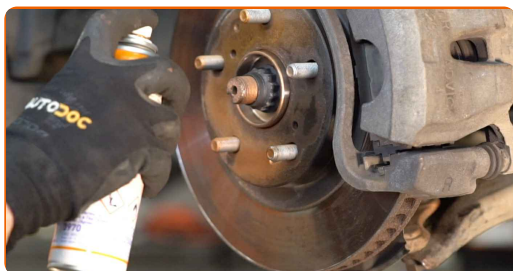

43

Install the wheel.

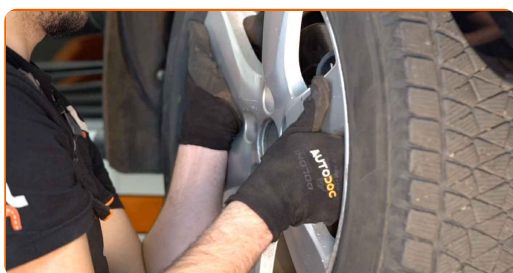

Replacement: wheel bearing – TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_). AUTODOC experts recommend:

- To avoid injury, hold up the wheel when screwing in the fastening bolts.

44

Screw in the wheel bolts. Use wheel impact socket #21.




45

Lower the car.


46

Tighten the drive shaft nut. Use a drive socket #30. Use a torque wrench. Tighten it to 216 nm torque.

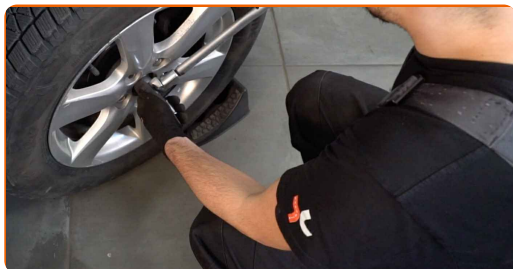


47

Restake the fastener of the driveshaft. Use a flat metal-working chisel. Use a hammer.

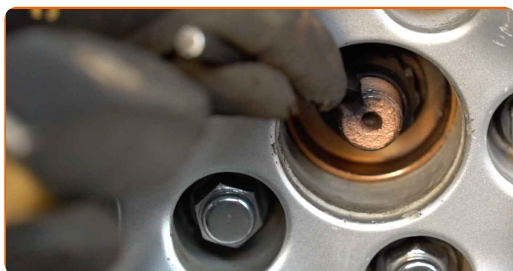

48

Tighten the wheel bolts using a criss-cross pattern. Use a torque wrench. Tighten it to 103 Nm torque.

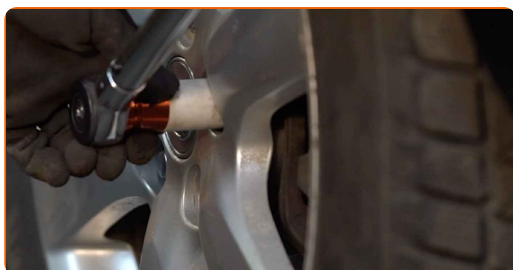

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

 Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

WHEEL BEARING: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.