



How to change front ball
joint on **VOLVO V70 II**
(285) – replacement
guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

ⓘ Important!

This replacement procedure can be used for:

VOLVO V70 II (285) 2.3 T5, VOLVO V70 II (285) 2.4 T, VOLVO V70 II (285) 2.5 TDI, VOLVO V70 II (285) 2.4, VOLVO V70 II (285) 2.4 D5, VOLVO V70 II (285) 2.4 Bifuel (CNG), VOLVO V70 II (285) 2.0 T, VOLVO V70 II (285) 2.4 T AWD, VOLVO V70 II (285) 2.4 D, VOLVO V70 II (285) 2.5 R T AWD, VOLVO V70 II (285) 2.5 T AWD, VOLVO V70 II (285) 2.4 D5 AWD, VOLVO V70 II (285) 2.5 T, VOLVO V70 II (285) 2.4 T5, VOLVO V70 II (285) 2.3 AWD, (+ 2)

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: VOLVO XC90 I (275) 2.4 D5

**REPLACEMENT: BALL JOINT – VOLVO V70 II (285).
TOOLS YOU NEED:**



- Wire brush
- WD-40 spray
- Brake cleaner
- Copper grease
- Drive socket # 13
- Drive socket # 21
- Wheel impact socket #19
- Ratchet wrench
- Torque wrench
- Crow bar
- Hammer
- Flat chisel
- Rubber mallet
- Ball joint puller
- Wheel chock

Buy tools

Replacement: ball joint – VOLVO V70 II (285). Tip:

- The replacement procedure is identical for the left and right ball joints.
- All work should be done with the engine stopped.

REPLACEMENT: BALL JOINT – VOLVO V70 II (285). TAKE THE FOLLOWING STEPS:


1

Secure the wheels with chocks.



2

Loosen the wheel mounting bolts. Use wheel impact socket #19.

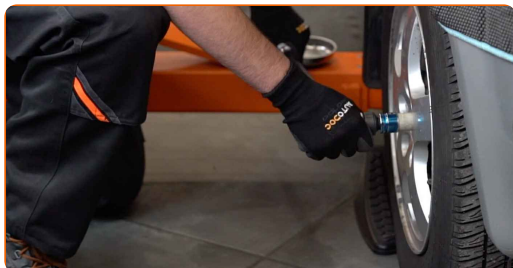

3

Raise the front of the car and secure on supports.

4

Unscrew the wheel bolts.



AUTODOC recommends:

- **Warning!** To avoid injury, hold the wheel while unscrewing the fastening bolts.
VOLVO V70 II (285)

5

Remove the wheel.



6

Clean all joints of the arm. Use a wire brush. Use WD-40 spray.




7

Unscrew the fastener connecting the ball joint to the suspension control arm. Use a drive socket #21. Use a ratchet wrench.



8

Unscrew the ball joint fastening to the steering knuckle. Use a drive socket #13. Use a ratchet wrench.

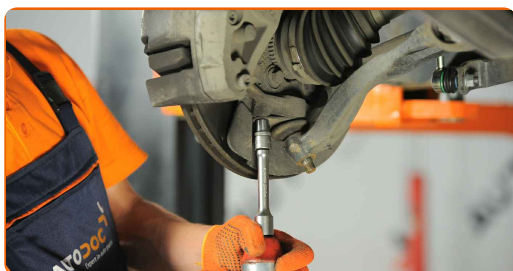


9 Remove the fastening bolts.

10 Disconnect the ball joint from the steering knuckle. Use a flat metal-working chisel. Use a hammer. Use a crowbar.




11 Disconnect the spherical joint from the arm. Use a ball joint puller.

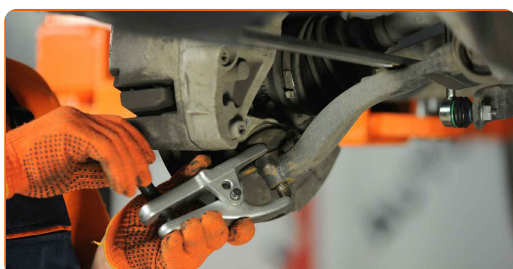

12 Remove the ball joint. Use a crowbar.



13 Clean the ball joint mounting seat. Use a wire brush. Use WD-40 spray.

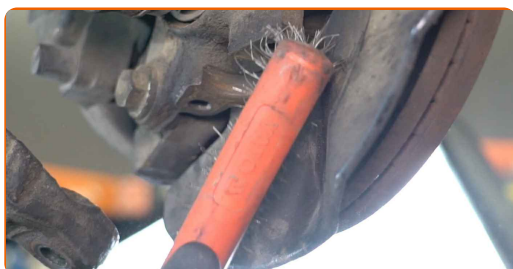


14 Install a new ball joint. Use a crowbar.



Replacement: ball joint – VOLVO V70 II (285). Professionals recommend:

- Do not damage the ball joint cover.

15 Attach the ball joint to the control arm. Use a crowbar.

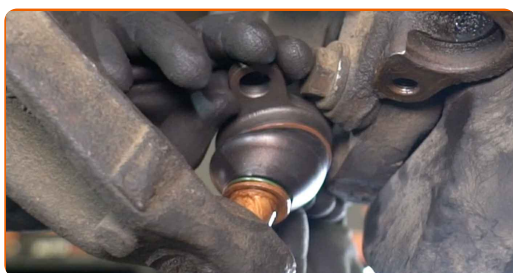


16 Connect the ball joint to the steering knuckle. Use a crowbar. Use a rubber mallet.



17 Install the fastening bolts.


18

Tighten the ball joint fastener. Use a drive socket #13. Use a torque wrench. Tighten it to 50 nm torque.

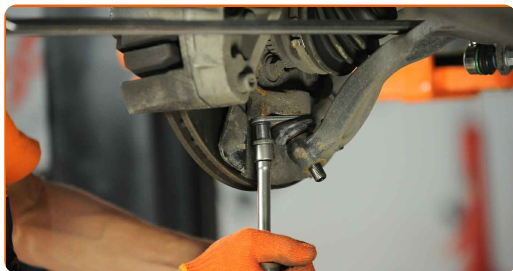


19

Tighten the fasteners connecting the ball joint to the control arm. Use a drive socket #21. Use a torque wrench. Tighten it to 100 nm torque.

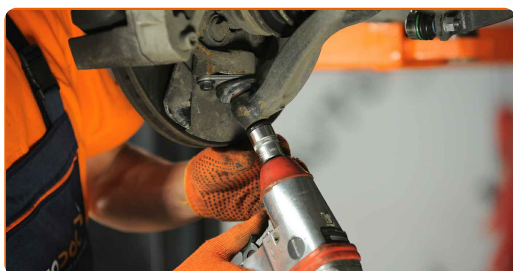

20

Treat the fasteners of the ball joint. Use copper grease.

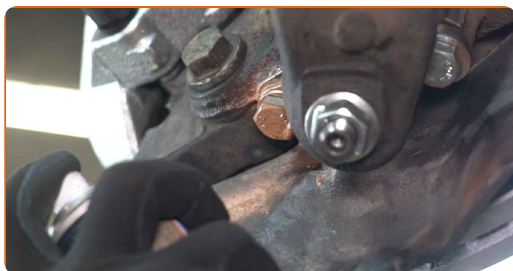

21

Treat the surface where the brake disc contacts the wheel rim. Use copper grease.



22

Clean the brake disk surface. Use a brake cleaner.



AUTODOC recommends:

- Replacement: ball joint – VOLVO V70 II (285). After applying the spray, wait a few minutes.

23

Install the wheel.



AUTODOC recommends:

- Warning! To avoid injury, hold the wheel while screwing in the fastening bolts on the car. VOLVO V70 II (285)

24

Screw in the wheel bolts. Use wheel impact socket #19.



25

Lower the car and working in a cross order, tighten the wheel bolts. Use wheel impact socket #19. Use a torque wrench. Tighten it to 140 nm torque.

**26**

Remove the jacks and chocks.



WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BALL JOINT: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.