



How to change front  
strut mount on **VW Jetta  
IV (162, 163, AV3, AV2)** –  
replacement guide

### SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

#### **ⓘ Important!**

This replacement procedure can be used for:

VW Jetta IV (162, 163, AV3, AV2) 1.2 TSI, VW Jetta IV (162, 163, AV3, AV2) 1.6 TDI, VW Jetta IV (162, 163, AV3, AV2) 2.0 TDI, VW Jetta IV (162, 163, AV3, AV2) 1.4 TSI, VW Jetta IV (162, 163, AV3, AV2) 2.0 TSI, VW Jetta IV (162, 163, AV3, AV2) 2.5, VW Jetta IV (162, 163, AV3, AV2) 2.0, VW Jetta IV (162, 163, AV3, AV2) 1.4 TSI Hybrid, VW Jetta IV (162, 163, AV3, AV2) 1.6, VW Jetta IV (162, 163, AV3, AV2) 1.8 TSI, VW Jetta IV (162, 163, AV3, AV2) 1.2 TSI 16V

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: VW GOLF VI (5K1) 2.0 GTi

**REPLACEMENT: STRUT MOUNT – VW JETTA IV (162, 163, AV3, AV2). TOOLS YOU NEED:**



- Wire brush
- WD-40 spray
- Copper grease
- Combination spanner #16
- Combination spanner #18
- Drive socket # 13
- Drive socket # 16
- Drive socket # 18
- Drive socket # 21
- 12-point socket # 24
- HEX bit No.H6.
- XZN socket bit # 6
- Shock absorber socket
- Wheel impact socket #17
- Ratchet wrench
- Torque wrench
- Flat chisel
- Hammer
- Tap wrench
- Crow bar
- Hydraulic strut spring compressor
- Hydraulic transmission jack
- Wheel chock

**Buy tools**

Replacement: strut mount – VW Jetta IV (162, 163, AV3, AV2). AUTODOC experts recommend:

- The replacement procedure is identical for the mounts of the left and right shock struts of the front suspension.
- All mounts of the front shock struts should be replaced simultaneously.
- Be sure to replace all self-locking nuts and bolts during installation.
- Please note: all work on the car – VW Jetta IV (162, 163, AV3, AV2) – should be done with the engine switched off.

## CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1

Open the bonnet.

2

Secure the wheels with chocks.



3

Loosen the wheel mounting bolts. Use wheel impact socket #17.



**4** Raise the front of the car and secure on supports.



**5** Unscrew the wheel bolts.



**AUTODOC recommends:**

- Important! Hold the wheel while unscrewing the fastening bolts. VW Jetta IV (162, 163, AV3, AV2)

**6** Remove the wheel.



**7** Remove the hub bearing protection cap.



Please note!

- Some cars are not equipped with wheel hub caps.

8

Install the wheel.



Replacement: strut mount – VW Jetta IV (162, 163, AV3, AV2). Tip:

- To avoid injury, hold up the wheel when screwing in the fastening bolts.

9

Screw in the wheel bolts. Use wheel impact socket #17.



10


Loosen the wheel hub bolt. Use drive 12-point socket #24. Use a tap wrench.




**11** Remove the cowl grille seal. Raise the wiper plastic cowl grille.



**12** Loosen the upper fastener of the shock strut mount. Use a drive socket #13. Use a ratchet wrench.

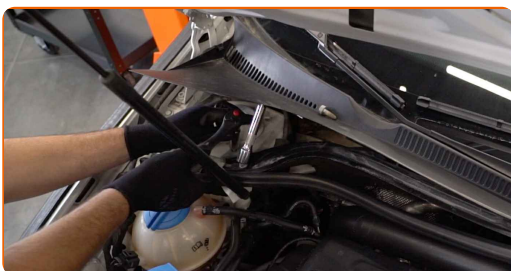

**13** Unscrew the wheel bolts.

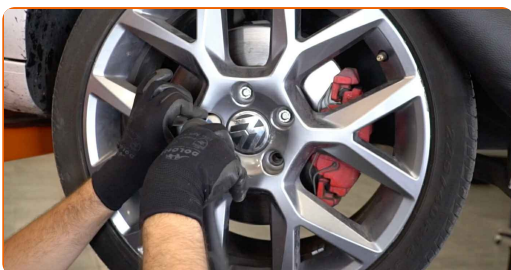


Replacement: strut mount – VW Jetta IV (162, 163, AV3, AV2). AUTODOC recommends:

- To avoid injury, hold up the wheel when unscrewing the bolts.

**14** Remove the wheel.



**15** Disconnect the wiring and the brake hose from the bracket on the shock strut. Use a crowbar.

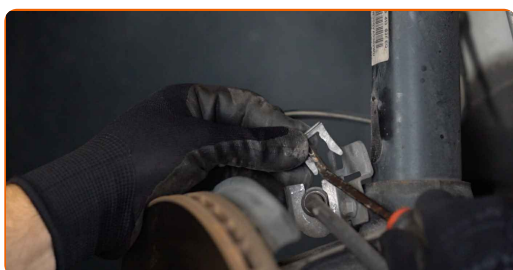

**16** Clean the fasteners connecting the stabiliser link to the shock strut, and those connecting the shock strut to the steering knuckle. Use a wire brush. Use WD-40 spray.



**17** Unscrew the nut and remove the stabilizer rod from the shock strut. Use a combination spanner #16. Use XZN #6. Use a ratchet wrench.





18

Unscrew the fastener connecting the drive shaft to the wheel hub. Use drive 12-point socket #24.



19

Unscrew the fastener connecting the ball joint to the suspension control arm. Use a drive socket #16. Use a ratchet wrench.




20

Prop up the steering knuckle. Use a hydraulic transmission jack.



21


Disconnect the spherical joint from the arm. Use a crowbar.

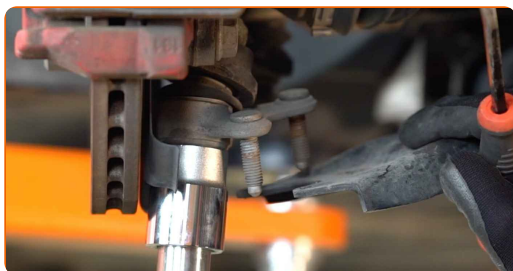

- 22** Unscrew the lower fastener connecting the shock strut to the steering knuckle. Use a drive socket #18. Use a combination spanner #18. Use a tap wrench.



- 23** Lower the hydraulic transmission jack by 10-15 cm.

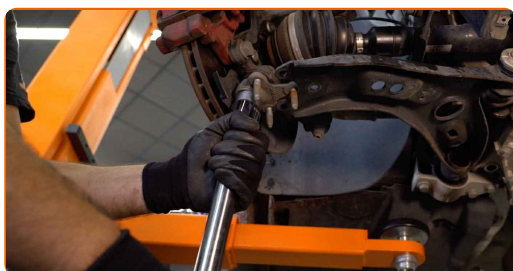

**AUTODOC recommends:**

- Replacement: strut mount – VW Jetta IV (162, 163, AV3, AV2). Lower the transmission jack smoothly, without jerks, to avoid damaging components and mechanisms.

- 24** Remove the drive shaft from the wheel hub.




- 25** Release the lower fastener connecting the shock strut to the steering knuckle. Use a special drive socket to remove the shock absorber. Use a ratchet wrench.



- 26** Disconnect the steering knuckle from the shock absorber strut. Use a flat metal-working chisel. Use a hammer.




- 27** Prop up the steering knuckle. Use a hydraulic transmission jack.

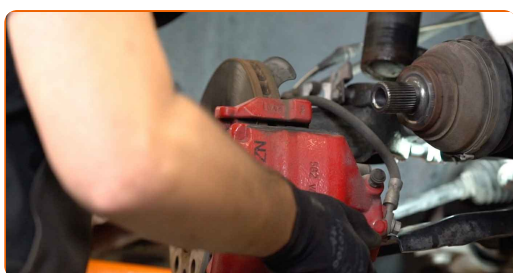

Replacement: strut mount – VW Jetta IV (162, 163, AV3, AV2). Tip:

- Make sure that the steering knuckle is not released from load.

- 28** Unscrew the upper fastening of the shock absorber strut.

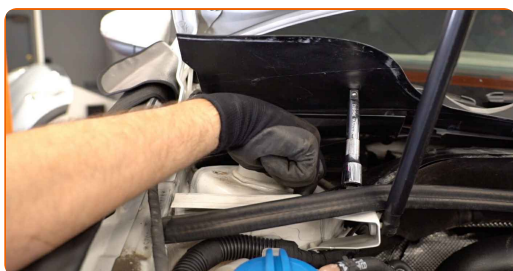

**AUTODOC recommends:**

- Important! Hold the suspension strut while unscrewing the fastening bolts. VW Jetta IV (162, 163, AV3, AV2)

**29**

Remove the suspension strut.



**30**

Set the shock absorber strut on the spring compressor tool.



**Replacement: strut mount – VW Jetta IV (162, 163, AV3, AV2). Tip from AUTODOC experts:**

- Note that when using a spring compressor, spring coils need to be securely gripped, compressing the spring on the opposite sides.
- Ensure the correct position of the spring in the retainer.
- Make sure that the spring coils tightly entered the lock handles.


**31** Compress the spring.



**32** Clean the shock absorber rod fastener. Use a wire brush. Use WD-40 spray.



**33** Remove the strut piston rod nut. Use a drive socket #21. Use HEX No.H6. Use a ratchet wrench.

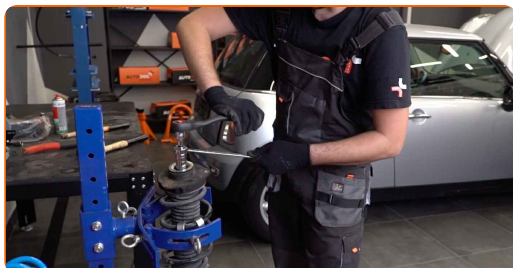

**34** Remove the shock absorber mount, boot and bump stop.



**35** Install the new mount, boot, and bump stop on the shock absorber.



36

Tighten the shock strut piston rod nut. Use a drive socket #21. Use HEX No.H6. Use a torque wrench. Tighten it to 60 Nm torque.




Replacement: strut mount – VW Jetta IV (162, 163, AV3, AV2). Tip from AUTODOC:

- Check to make sure the spring is positioned correctly. Avoid its misalignment.

37

Decompress the spring.

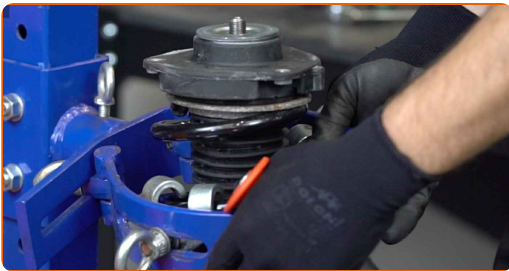


38


Remove the assembled shock strut.



**39** Install the shock strut into the wheel arch.

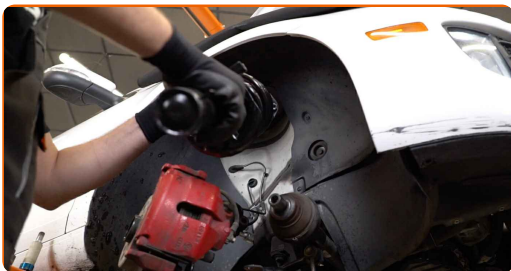

**40** Secure the upper fasteners of the shock strut. Do not tighten it.

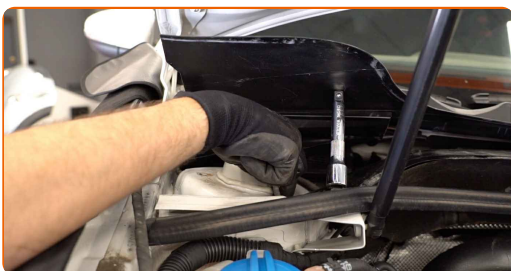

**AUTODOC recommends:**

- VW Jetta IV (162, 163, AV3, AV2) – To avoid injury, hold the suspension strut while screwing in the fastening bolts.

**41** Install and tighten a new bolt of the steering knuckle. Use a drive socket #18. Use a combination spanner #18. Use a torque wrench. Tighten it to 70 Nm torque.+90°



**AUTODOC recommends:**

- Important! Be sure to use new fasteners.

**42** Remove the support from under the steering knuckle.



**43** Mount the drive shaft into the wheel hub.



**44** Attach the ball joint to the control arm.



**45** Tighten the ball joint fastening nut. Use a drive socket #16. Use a torque wrench. Tighten it to 60 Nm torque.







- 46 Secure the stabilizer link on the suspension strut. Use a combination spanner #16. Use XZN #6. Use a torque wrench. Tighten it to 65 Nm torque.




- 47 Connect the fastener of the ABS sensor cable to the shock absorber strut. Fasten the brake hose on the strut.

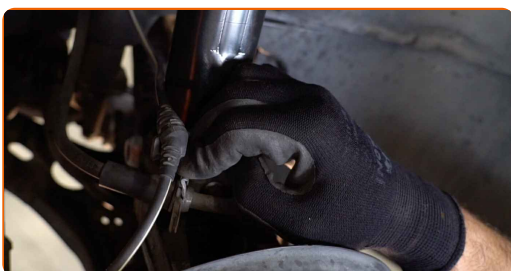

- 48 Clean the wheel rim mounting seat. Use a wire brush. Treat the contacting surface. Use copper grease.

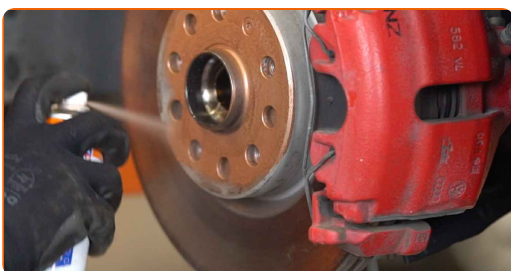

- 49 Install the wheel.

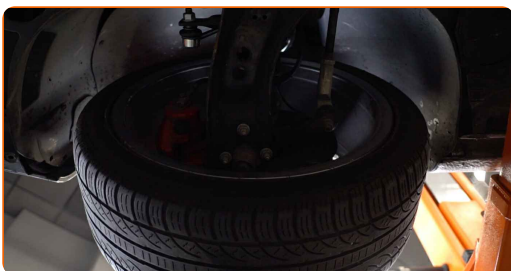


Replacement: strut mount – VW Jetta IV (162, 163, AV3, AV2). Professionals recommend:

- To avoid injury, hold up the wheel when screwing in the fastening bolts.


50

Screw in the wheel bolts. Use wheel impact socket #17.

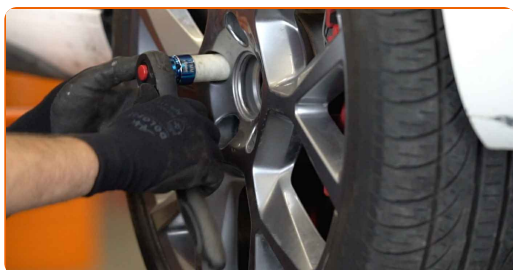

51

Lower the car.

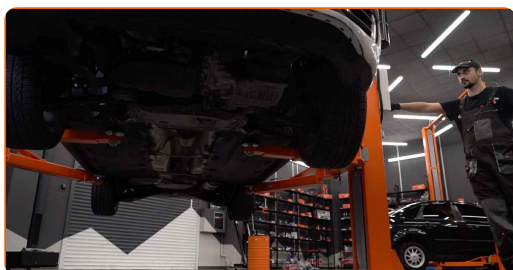

52

Tighten the shock strut top mount. Use a drive socket #13. Use a torque wrench. Tighten it to 15 Nm torque.+90°



AUTODOC recommends:

- Important! Be sure to use new fasteners.

53

Install and secure the cowl grille.




54

Tighten the bolt connecting the drive shaft to the wheel hub. Use drive 12-point socket #24. Use a torque wrench. Tighten it to 70 Nm torque. +90°



55

Install the hub bearing protection cap.

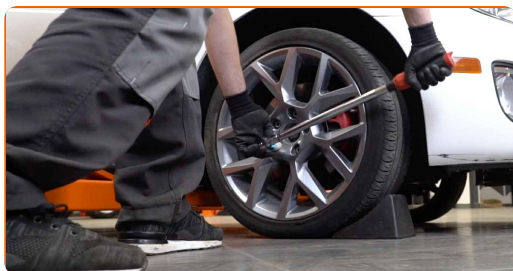


**AUTODOC recommends:**

- Important! Be sure to use new fasteners.

56

Tighten the wheel bolts using a criss-cross pattern. Use a torque wrench. Tighten it to 120 Nm torque.

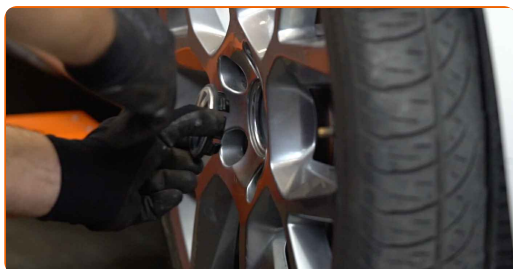

57

Remove the jacks and chocks.

58

Close the hood.

**WELL DONE!** 

**VIEW MORE TUTORIALS**

# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**+ AUTODOC**

GET IT ON  
**Google Play**

 Download on the  
**App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**STRUT MOUNT: A WIDE SELECTION**

## **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.