# - AUTODOC CLUB

How to change front windshield wipers on VW Passat Saloon (3C2) – replacement guide



#### SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle


#### (i) Important!

This replacement procedure can be used for:

VW Passat Saloon (3C2) 1.6 FSI, VW Passat Saloon (3C2) 2.0 FSI, VW Passat Saloon (3C2) 1.9 TDI, VW Passat Saloon (3C2) 2.0 TDI 16V, VW Passat Saloon (3C2) 2.0 TDI, VW Passat Saloon (3C2) 1.6, VW Passat Saloon (3C2) 3.2 FSI 4motion, VW Passat Saloon (3C2) 2.0 TDI 16V 4motion, VW Passat Saloon (3C2) 2.0 FSI 4motion, VW Passat Saloon (3C2) 2.0 TDI 4motion, VW Passat Saloon (3C2) 3.6 R36 4motion, VW Passat Saloon (3C2) 3.6 FSI 4motion, VW Passat Saloon (3C2) 3.6 FSI, VW Passat Saloon (3C2) 1.4 TSI, VW Passat Saloon (3C2) 1.8 TSI, (+ 3)

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: VW GOLF VI (5K1) 2.0 GTi

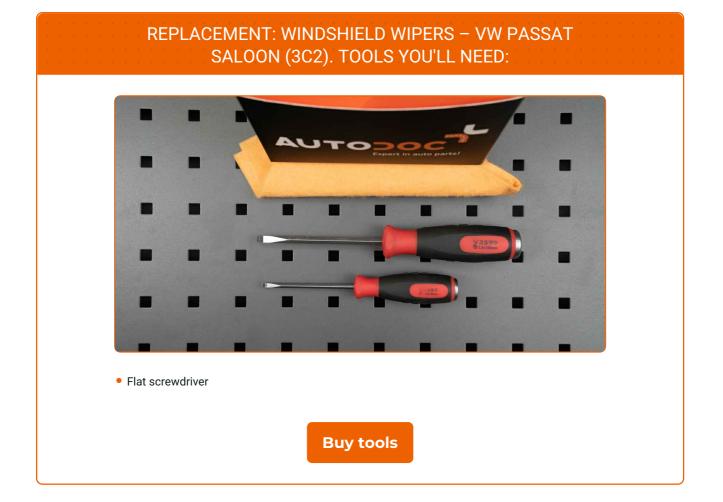

•

O

# + AUTODOC CLUB



# Replacement: windshield wipers – VW Passat Saloon (3C2). AUTODOC experts recommend:

- Always replace front wiper blades together. It will ensure efficient and uniform cleaning of the windshield.
- Don't confuse the wiper blades of the driver and passenger side.
- The replacement procedure for both wiper blades is identical.
- All work should be done with the engine stopped.

## REPLACEMENT: WINDSHIELD WIPERS – VW PASSAT SALOON (3C2). TAKE THE FOLLOWING STEPS:

Switch on the ignition. Pull the windscreen wiper stalk to the downward position.



2

1

Switch off the ignition. In the service mode, the wipers will be in the upper position.



# + AUTODOC CLUB



3

Prepare the new windscreen wipers.



4

Pull the wiper arm away from the glass surface until it stops.



5

Press the clip. Use a flat screwdriver. Remove the blade from the wiper arm.



Replacement: windshield wipers – VW Passat Saloon (3C2). Tip from AUTODOC:

 When replacing the wiper blade, take caution to prevent the spring-loaded wiper arm from hitting the glass.





Install the new wiper blade and carefully press the wiper arm down to the glass.



Replacement: windshield wipers – VW Passat Saloon (3C2). AUTODOC recommends:

• Don't touch the wiper blade at the working rubber edge to prevent damage to the graphite coating.

7

Switch on the ignition. Pull the windscreen wiper stalk to the downward position.



8

By doing so, you will switch the windscreen wipers from the service mode to the operation mode.





# Replacement: windshield wipers – VW Passat Saloon (3C2). Professionals recommend:

• Ensure that the blade rubber strip fits tightly to the glass along the entire length.

9

After installation check the wipers performance. The blades shouldn't intersect or bump against the windshield seal.



**VIEW MORE TUTORIALS** 



### AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE



#### A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

#### WINDSHIELD WIPERS: A WIDE SELECTION

### **i DISCLAIMER**:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.