



How to change front
lower arm on **Mercedes**
Vito W638 –
replacement guide

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:

MERCEDES-BENZ Vito Minibus (W638) 108 D 2.3 (638.164), MERCEDES-BENZ Vito Minibus (W638) 110 TD 2.3 (638.174), MERCEDES-BENZ Vito Minibus (W638) 113 2.0 (638.114, 638.194), MERCEDES-BENZ V-Class (W638/2) V 230 TD (638.274), MERCEDES-BENZ V-Class (W638/2) V 230 (638.234, 638.294), MERCEDES-BENZ Vito Minibus (W638) 114 2.3 (638.134, 638.194), MERCEDES-BENZ V-Class (W638/2) V 280 (638.244, 638.294), MERCEDES-BENZ V-Class (W638/2) V 200 (638.214, 638.294), MERCEDES-BENZ Vito Van (W638) 108 D 2.3 (638.064, 638.068), MERCEDES-BENZ Vito Van (W638) 110 D 2.3 (638.074, 638.078), MERCEDES-BENZ Vito Van (W638) 113 2.0 (638.014, 638.094), MERCEDES-BENZ Vito Van (W638) 114 2.3 (638.034, 638.094), MERCEDES-BENZ V-Class (W638/2) V 200 CDI (638.294), MERCEDES-BENZ V-Class (W638/2) V 220 CDI (638.294), MERCEDES-BENZ Vito Minibus (W638) 108 CDI 2.2 (638.194), (+ 4)

The steps may slightly vary depending on the car design.

REPLACEMENT: FRONT LOWER ARM – MERCEDES VITO W638. LIST OF THE TOOLS YOU'LL NEED:



- Wire brush
- WD-40 spray
- Copper grease
- Drive socket # 8
- Drive socket # 19
- Combination spanner #18
- Combination spanner #21
- Wheel impact socket #17
- Ratchet wrench
- Torque wrench
- Flat chisel
- Hammer
- Crow bar
- Hydraulic transmission jack
- Wheel chock

BUY TOOLS

Replacement: front lower arm – Mercedes Vito W638. AUTODOC recommends:


- The replacement procedure is identical for the left and right lower control arms.
- All work should be done with the engine stopped.

REPLACEMENT: FRONT LOWER ARM – MERCEDES VITO W638. USE THE FOLLOWING PROCEDURE:

1 Secure the wheels with chocks.



2 Loosen the wheel mounting bolts. Use wheel impact socket #17.

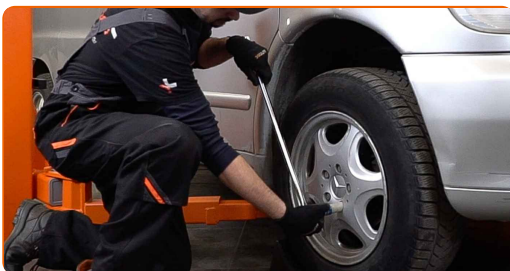

3 Raise the front of the car and secure on supports.



4

Unscrew the wheel bolts.




AUTODOC recommends:

- Important! Hold the wheel while unscrewing the fastening bolts. Mercedes Vito W638


5

Remove the wheel.

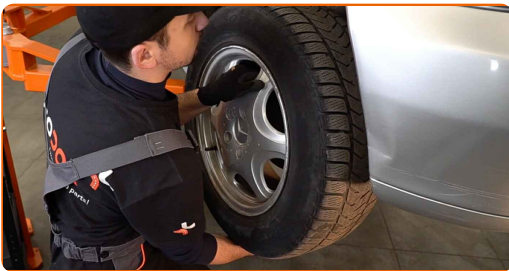

6

Clean all joints of the arm. Use a wire brush. Treat all joints of the arm. Use WD-40 spray.

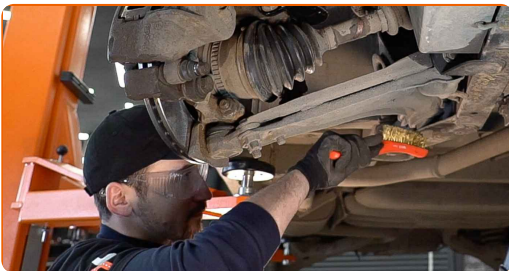


AUTODOC recommends:

- Replacement: front lower arm – Mercedes Vito W638. After applying the spray, wait a few minutes.
- Wear protective goggles.

7

Unscrew the ball joint fastening to the steering knuckle. Use a combination spanner #21 (2 pieces).

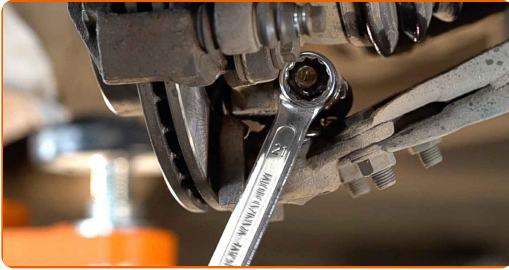


8

Unscrew and remove the wheel arch cover fasteners. Use a drive socket #8. Use a ratchet wrench.




9

Remove the wheel arch cover.

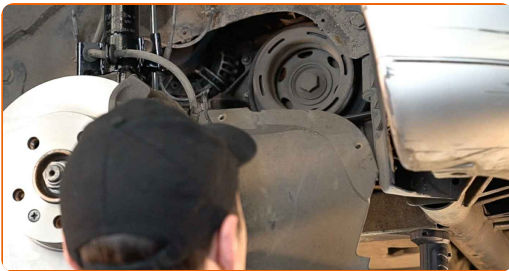

10

Unscrew the front arm fastener. Use a combination spanner #18. Use a drive socket #19. Use a ratchet wrench.

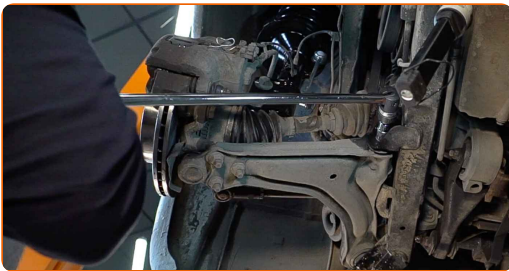

11

Remove the fastening bolt. Use a crowbar.



12

Unscrew the rear arm fastener. Use a combination spanner #21. Use a drive socket #19. Use a ratchet wrench.




13

Clean the fastener connecting the ball joint to the steering knuckle. Use WD-40 spray.




14

Release the fastener connecting the ball joint to the steering knuckle. Use a flat metal-working chisel. Use a hammer.

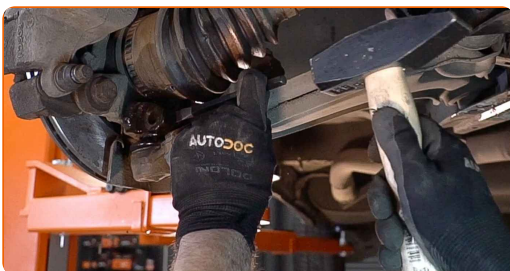


15

Disconnect the spherical joint from the arm. Use a crowbar.

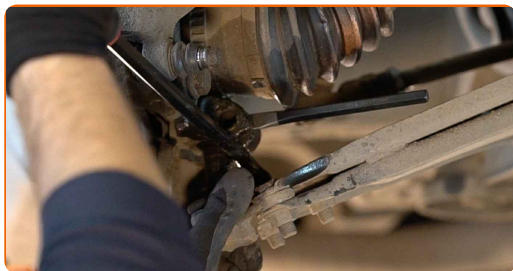


16

Remove the arm. Use a crowbar.

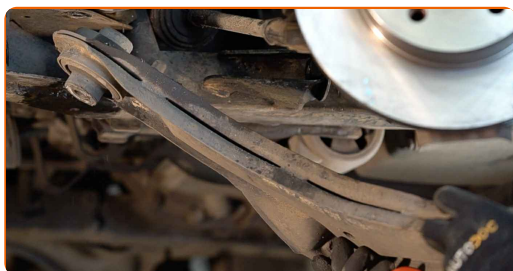


17

Clean the mounting seats and the thread of the suspension arm. Use a wire brush. Use WD-40 spray.

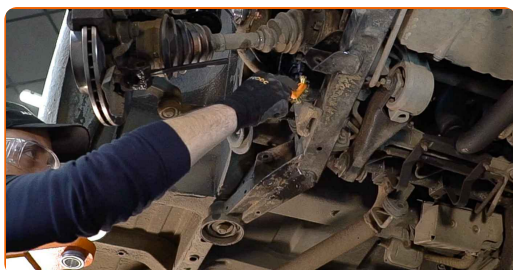

18

Install a new arm.

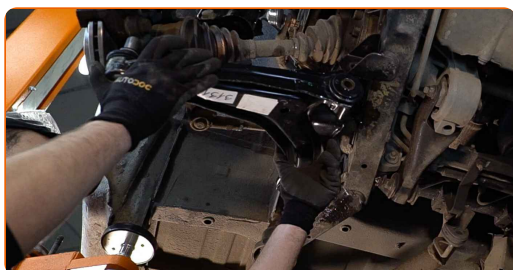


Replacement: front lower arm – Mercedes Vito W638. AUTODOC experts recommend:

- During the installation process, use only new bolts and nuts.
- Do not damage the ball joint cover.


19

Connect the ball joint to the steering knuckle.

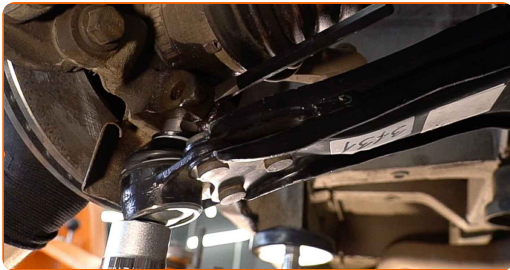


20

Support the arm. Use a hydraulic transmission jack.

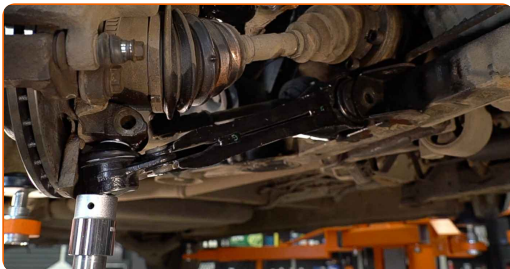


21

Take the flat chisel out of the steering knuckle.

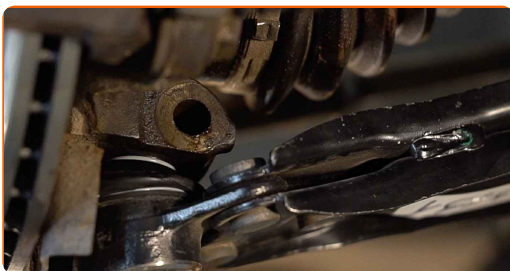

22 Install the fastening bolt. Do not tighten it.

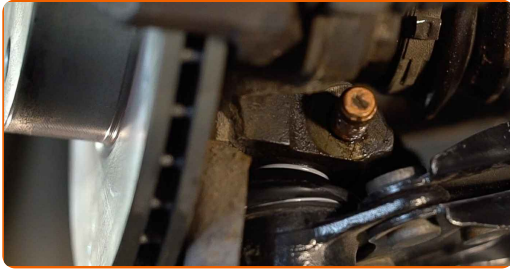


23 Screw the rear arm fastener. Use a drive socket #19. Use a combination spanner #21. Use a ratchet wrench.




24 Raise the hydraulic transmission jack by 10-15 cm.



25 Tighten the front fastener connecting the control arm to the subframe. Use a drive socket #19. Use a torque wrench. Tighten it to 155 nm torque.

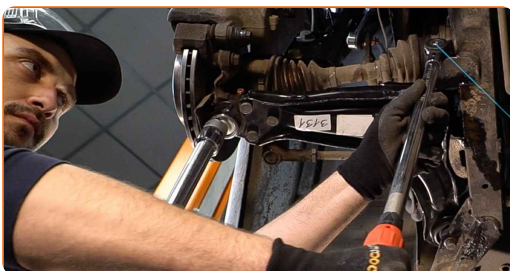


- 26 Tighten the rear fastener of the control arm. Use a drive socket #19. Use a combination spanner #21. Use a torque wrench. Tighten it to 90 nm torque.

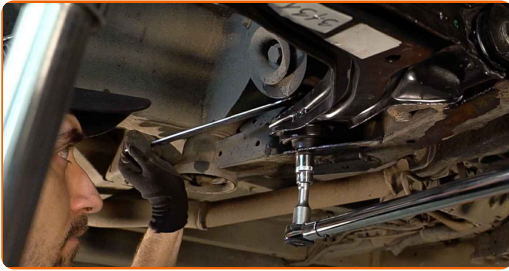

- 27 Tighten the ball joint fastener. Use a combination spanner #21. Use a torque wrench. Tighten it to 162 nm torque.



- 28 Remove the support from under the arm.

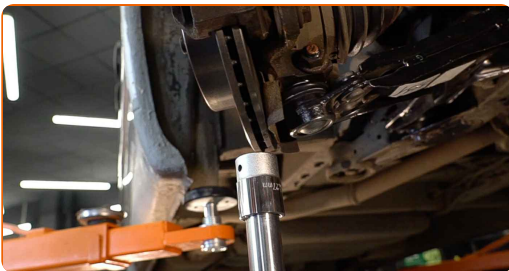

AUTODOC recommends:

- Replacement: front lower arm – Mercedes Vito W638. Lower the transmission jack smoothly, without jerks, to avoid damaging components and mechanisms.

29

Treat all joints of the arm. Use copper grease.



30

Install the wheel arch cover to its mounting seat.



31

Install and tighten the wheel arch cover fasteners. Use a drive socket #8. Use a ratchet wrench.



32

Clean the wheel rim mounting seat. Use a wire brush. Treat the contacting surface. Use copper grease.



33 Install the wheel.




Replacement: front lower arm – Mercedes Vito W638. Tip from AUTODOC:

- To avoid injury, hold up the wheel when screwing in the fastening bolts.

34 Screw in the wheel bolts. Use wheel impact socket #17.




35 Lower the car and working in a cross order, tighten the wheel bolts. Use a torque wrench. Tighten it to 175 nm torque.

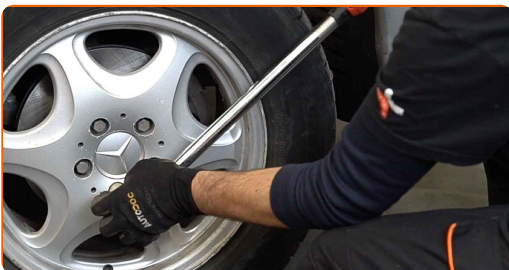

36

Remove the jacks and chocks.

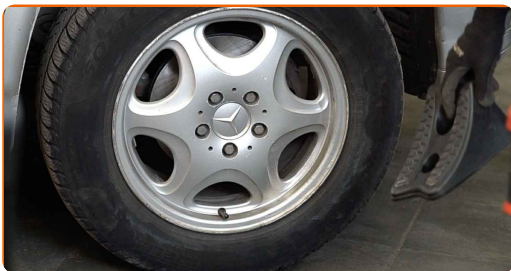

WELL DONE!

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

AUTODOC+

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR MERCEDES

CONTROL ARM: A WIDE SELECTION

CHOOSE CAR PARTS FOR MERCEDES VITO W638

CONTROL ARM FOR MERCEDES: BUY NOW

**CONTROL ARM FOR MERCEDES VITO W638: THE BEST
DEALS & OFFERS**

ⓘ DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.