



How to change pollen  
filter on **Toyota Yaris**  
**Mk2** – replacement guide

## VIDEO TUTORIAL



### Important!

This replacement procedure can be used for:

TOYOTA LAND CRUISER 150 (KDJ15\_, GRJ15\_) 4.0 V6 VVT-i (GRJ150\_, GRJ125\_),  
 TOYOTA LAND CRUISER 150 (KDJ15\_, GRJ15\_) 3.0 D-4D (KDJ155\_, KDJ150\_),  
 TOYOTA Urban Cruiser (\_P1\_) 1.33 (NSP110\_), TOYOTA Yaris / Vios Saloon (\_P9\_)  
 1.5 (NCP93), TOYOTA AURIS (NRE15\_, ZZE15\_, ADE15\_, ZRE15\_, NDE15\_) 1.5  
 (NZE151\_), TOYOTA AURIS (NRE15\_, ZZE15\_, ADE15\_, ZRE15\_, NDE15\_) 1.5 4WD  
 (NZE154\_), TOYOTA RAV 4 III (ACA3\_, ACE\_, ALA3\_, GSA3\_, ZSA3\_) 2.4 4WD (ACR38),  
 TOYOTA Alphard / Vellfire (\_H2\_) 3.5, TOYOTA Yaris Hatchback (\_P13\_) 1.3  
 (NSP130\_), TOYOTA Yaris Hatchback (\_P13\_) 1.0 (KSP130\_), TOYOTA Yaris  
 Hatchback (\_P13\_) 1.3 4WD (NSP135\_), TOYOTA LAND CRUISER (VDJ20\_, UZJ20\_)  
 4.6 V8, TOYOTA Verso S (\_P12\_) 1.33 (NSP120\_), TOYOTA Verso S (\_P12\_) 1.4 D4-D  
 (NLP121\_), TOYOTA Yaris Hatchback (\_P9\_) 1.33 VVT-i (NSP90\_), (+ 215)


The steps may slightly vary depending on the car design.

**Replacement: pollen filter – Toyota Yaris Mk2. AUTODOC recommends:**

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Please note: all work on the car – Toyota Yaris Mk2 – should be done with the engine switched off.

**CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:**

**1** Open the glove box.

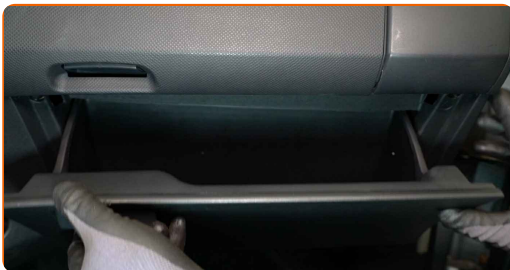


**2** Press on the side walls of the glove box to release the stoppers.



**3** Remove the glove box.



**4** Release the cabin filter cover clips.

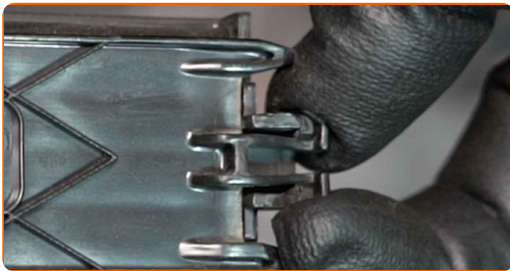

**5** Remove the cabin filter housing cover.



**6** Remove the cabin filter.



Replacement: pollen filter – Toyota Yaris Mk2. Tip from AUTODOC experts:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

**7** Insert a new filter element into the filter housing.




Replacement: pollen filter – Toyota Yaris Mk2. Professionals recommend:

- Check out the correct location of the filter element. Do not skew.
- Follow the air flow direction arrow on the filter.


**8** Reinstall the cabin filter housing cover. Make sure you hear a click indicating that it is locked in place.




**9** Install the glove box.

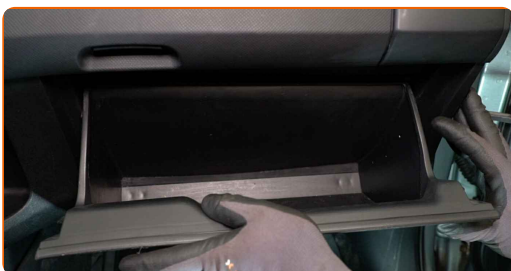

10 Press on the side walls of the glove box to reinstall the stoppers.

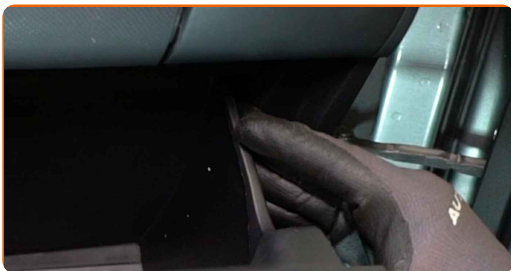


11 Close the glove box.

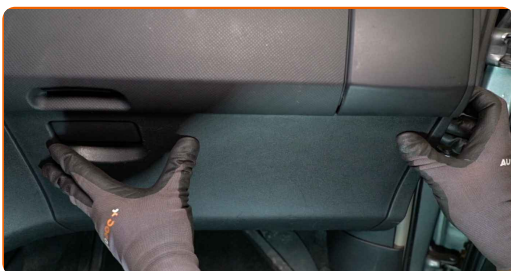

12 Switch on the ignition.

13 Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.

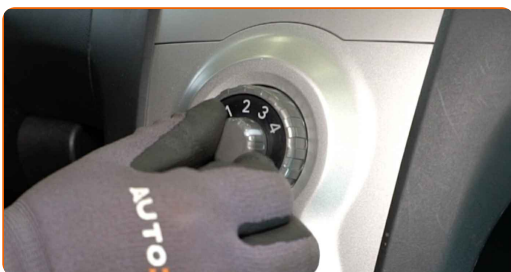

14 Switch off the ignition.

**WELL DONE!** 

**VIEW MORE TUTORIALS**

# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**+ AUTODOC**

GET IT ON  **Google Play**

 **Download on the App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR TOYOTA**

**POLLEN FILTER: A WIDE SELECTION**

**CHOOSE CAR PARTS FOR TOYOTA YARIS MK2**

**POLLEN FILTER FOR TOYOTA: BUY NOW**

**POLLEN FILTER FOR TOYOTA YARIS MK2: THE BEST DEALS  
& OFFERS**

### **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.