AUTODOC
Expert in auto parts!

How to replace motor oil and an oil filter on Honda CR-V III

Carry out replacement in the following order:

Change the engine oil when replacing the oil filter on the Honda CR-V III.

Wear gloves to prevent contact with hot liquid.

For the Honda CR-V III please use the oil recommended by the manufacturer.

1

Set the car at the service pit or lift it with a hoist

AutoDoc recommends:

The vehicle must be on even keel, and if it is at an angle, the drain plug must be at the lowest point.

2

Loosen the oil filter.

How to replace motor oil and an oil filter on Honda CR-V III

3

Remove the oil filter.

4.1

Screw the new filter into its place.

4.2

5

Unscrew the drain plug.

6

Drain the used oil.

AutoDoc recommends:

Clean the plug and put a new O-ring on it.

7

Set the drain plug in place and tighten it.

8

Open the hood

9.1

Fill the engine with oil through the oil filler.

9.2

9.3

AutoDoc recommends:

Run the engine for a few minutes.

10.1

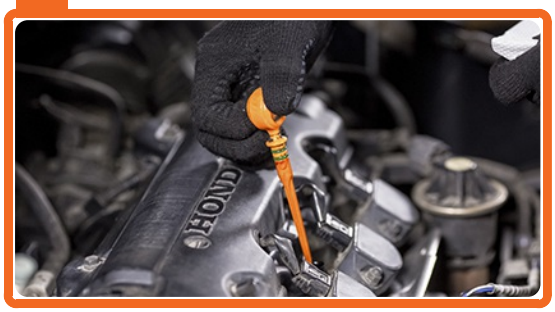

Check the oil level 5 minutes after the stop of the engine operation using a dipstick and add oil if necessary.

10.2

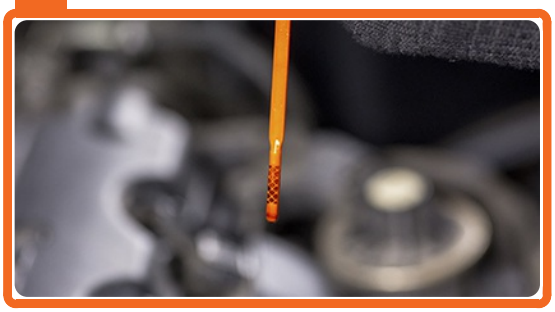

11

Close the hood

AutoDoc recommends:

Check for leaks the drain plug and the oil filter gasket after a test trip. If necessary, carefully tighten them.

We hope that this information have been useful for you!

Video tutorials

Watch our detailed video guides about your Honda CR-V III repair on our youtube channel. Watch video guides.

AutoDoc online

Highest quality oil filters for your car Honda CR-V III are available on AutoDoc. Go to the website.

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

QUALITY AUTO PARTS

HONDA

OIL FILTERS

HONDA CR-V III

OIL FILTERS FOR HONDA

OIL FILTERS FOR HONDA CR-V III

Disclaimer:

The document contains only general recommendations that may be useful for you when you perform repair or replacement works. AutoDoc shall not be liable for any loss, injury, damage of property, acquired in the repair or replacement process due to incorrect usage or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for informative purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

AUTODOC IN SOCIAL MEDIA